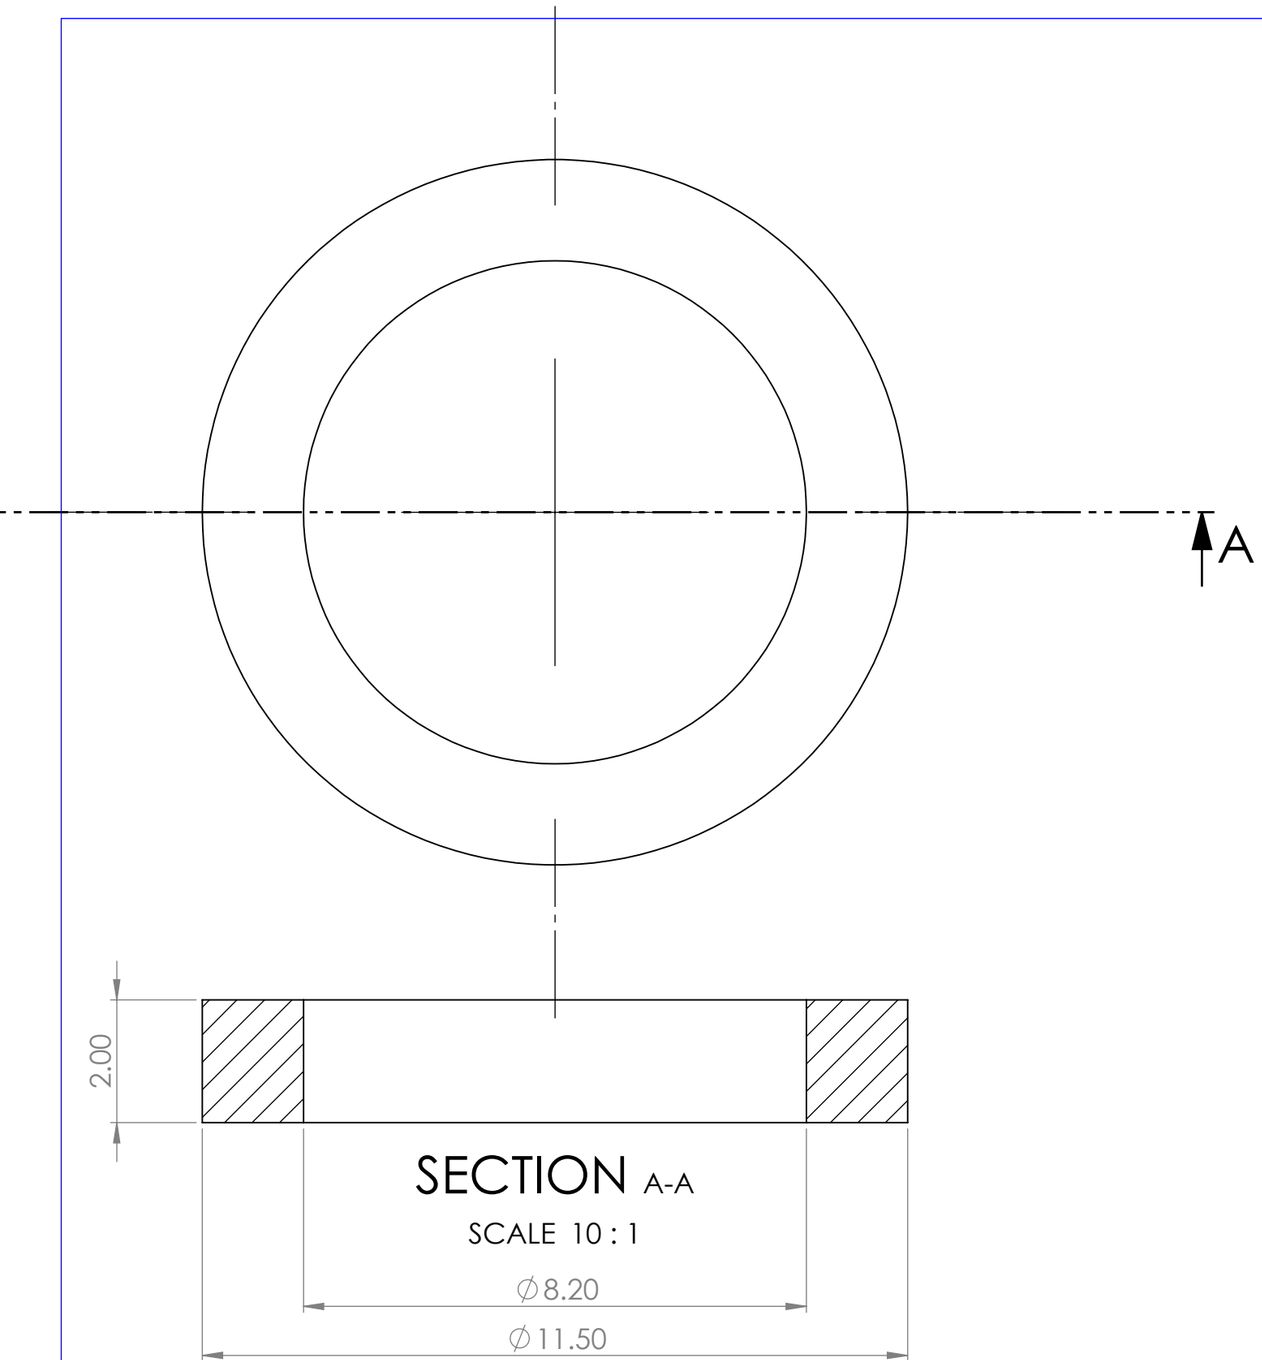

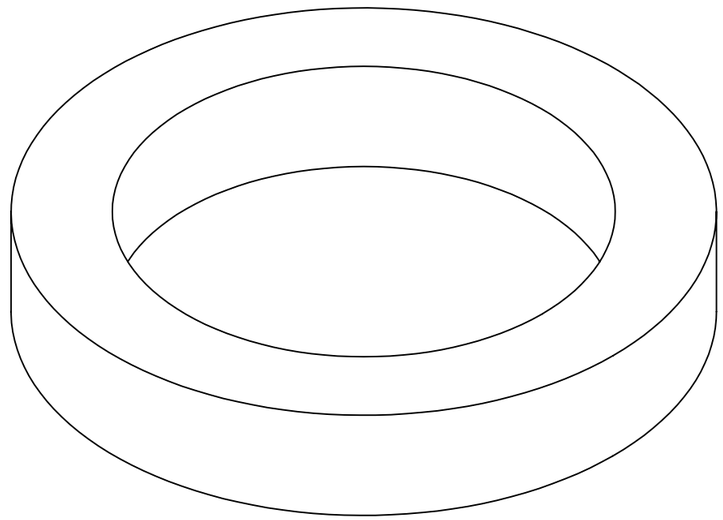

303 stainless. Faces parallel 0.01. Bears on the top 608 inner ring only.
General tolerance ISO 2768-mK, linear +-0.1, angles +-0.5 deg; all edges 0.3x45; Ra 1.6 on fits, 3.2 elsewhere.

grindmn inner-ring spacer (part 10) - machining

grindmn_spacer | projects/grindmn/requirements.md section 5.4
Scale 10:1 (iso 10:1) mm 3rd angle

2026-11-06

SOLIDWORKS Educational Product. For Instructional Use Only.