
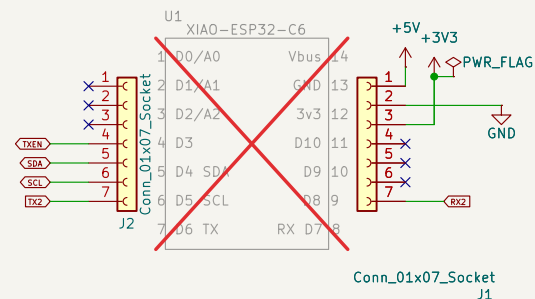


Yellow

RS-485 Interface



The image contains two circuit diagrams for I2C connections. The left diagram shows the I2C pinout for the I2CLED64 module, with pins 1-4 labeled SDA, SCL, 3v3, and GND. The right diagram shows the I2C pinout for the I2C1 module, with pins 1-4 labeled SCL, SDA, V+, and GND. Both diagrams include a 5V supply, a 10k pull-up resistor (R8, R21), and a 5V LED (Q8, Q9) connected to the SDA line.

[illegible]

CAN TERM jumpers

Sheet: /
File: cpNode-Xiao.kicad_sch

Title: cpNode Xiao

Size: USLetter	Date: 2026.07
KiCad E.D.A. 10.0.1	

John Plocher

Rev: 3.0

active