


Yellow

RS-485 Interface

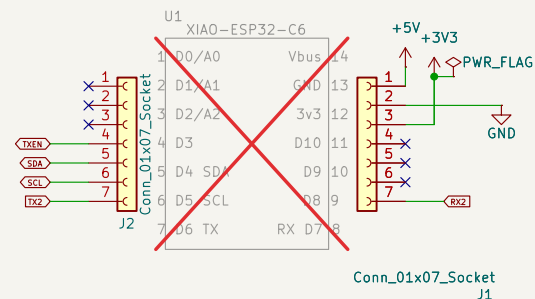

Power Supply

The diagram illustrates the power supply circuit for the Arduino Pro Mini. It features a DC-DC converter module (DCJ0202) that takes a 7.5-12VDC input and provides a +5V output. The module includes a reverse voltage protection diode (D1), a 220uF capacitor (C1), a 0.1uF capacitor (C2), and a 1uF capacitor (C3). The output is connected to the +5V pin of the ATmega328P microcontroller (U1). The module also has a PWR_FLAG pin connected to a green LED (LED1) and a +5V pin connected to a 4k7 resistor (R5). The module is powered by a 7.5-12VDC source (J3) and a 3A DC source (V3).



Rev: 3.0
Id: 1/1