

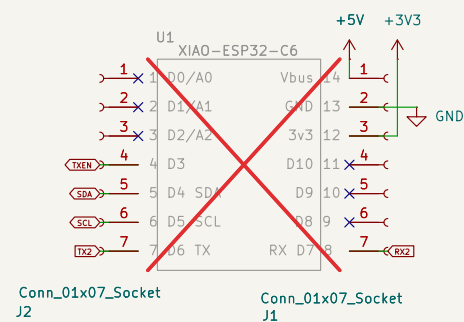




CMRI

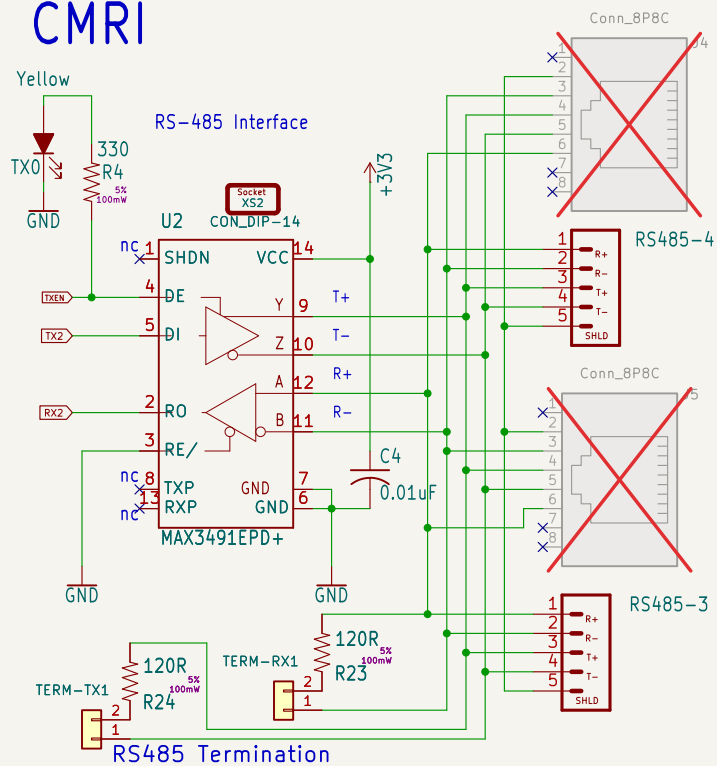

12C

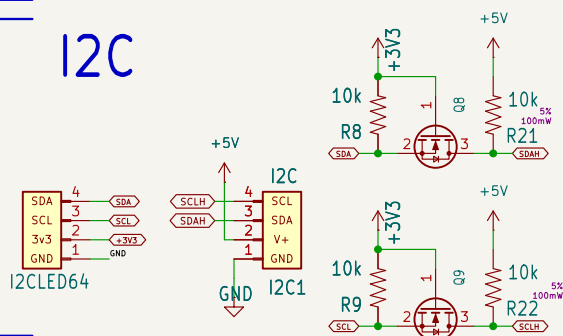

Power Supply

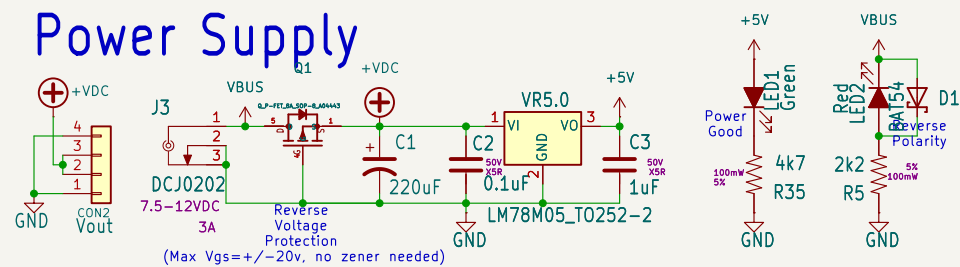

Breaks out 5v I2C, IO4 style headers and I2C OLED Display
Processor carrier board for ESP32-DEV

Sheet: /
File: cpNode-Xiao-68x90.kicad_sch

Designer: John Plocher

Title: cpNode Xiao baseboard

MRCS

Size: USLetter	Date: 2026.04
KiCad E.D.A. 10.0.1	

Rev: 3.0
Id: 1/1