


Yellow

RS-485 Interface

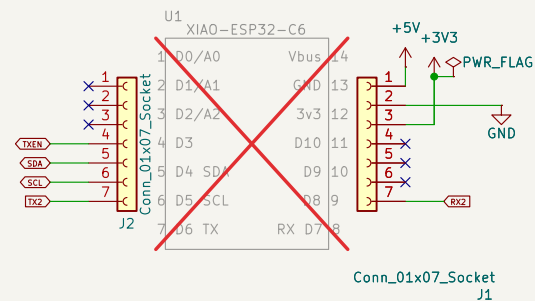

The image contains two circuit diagrams for I2C connections. The left diagram shows the I2C pinout for the I2CLED64 module, with pins 1-4 labeled SDA, SCL, 3v3, and GND. The right diagram shows the I2C pinout for the I2C1 module, with pins 1-4 labeled SCL, SDA, V+, and GND. Both diagrams include a 5V supply, a 10k resistor (R8 or R9), and a 100mW resistor (R21 or R22) connected to the SDA pin.

Power supply

The circuit diagram shows the power supply section of the PCB. It includes a DC-DC converter (DCJ0202) that takes +VDC input and outputs +5V. The output is connected to the LED1 (Green) and LED2 (Red). The circuit also includes a MOSFET (J3) and a diode (D1) for reverse voltage protection. Various capacitors (C1, C2, C3) are used for filtering and decoupling. The output voltage is +5V, and the current is 3A. The circuit is labeled with component values and pin numbers.

Components and values:


- DCJ0202 (DC-DC Converter)
- J3 (MOSFET)
- D1 (Diode)
- C1 (220uF)
- C2 (0.1uF)
- C3 (1uF)
- VR5.0 (Voltage Regulator)
- LM78M05_T0252-2 (5V Regulator)
- LED1 (Green)
- LED2 (Red)
- R35 (4k7)
- R5 (2k2)

Pin numbers and labels:

- 1, 2, 3, 4 (DCJ0202 pins)
- 1, 2, 3, 4, 5 (J3 pins)
- 1, 2, 3 (VR5.0 pins)
- 1, 2, 3 (LM78M05_T0252-2 pins)
- 1, 2, 3 (LED1 pins)
- 1, 2, 3 (LED2 pins)
- 1, 2, 3 (R35 pins)
- 1, 2, 3 (R5 pins)

Labels and values:

- +VDC
- GND
- CON2 Vout
- 7.5-12VDC
- 3A
- Reverse Voltage Protection
- (Max Vgs=+-20v, no zener needed)
- +5V
- Power Good
- 100mW
- 5%
- 4k7
- 2k2
- 5%
- 100mW

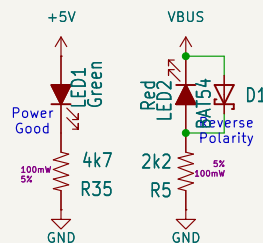

Sheet: /
File: cpNode-Xiao.kicad_sch

Title: cpNode Xiao

Size: USLetter Date: 2026.07

KiCad E.D.A. 10.0.1



open hardware

MRCS
Fab Info
cpNode Xiao
~~Board
Boilerplate~~

SPCoast

John Plocher

Rev: 3.0

active