



Yellow

RS-485 Interface

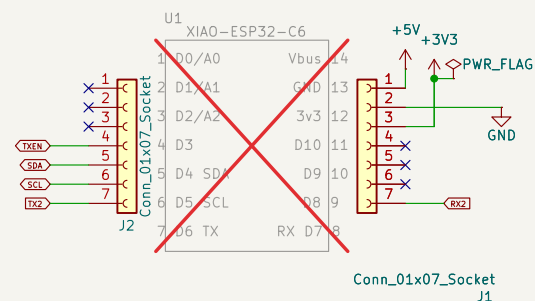

Power Supply

The diagram illustrates a power supply circuit for a microcontroller. It features a DC-DC converter (DCJ0202) that takes a +VDC input and provides a +5V output. The +5V output is connected to the VBUS pin of the microcontroller. A reverse voltage protection diode (D1, BAT54) is connected between VBUS and COM. A green LED (LED1) is connected between VBUS and GND, with a 4k7 resistor (R35) in series. A 100mW 5% resistor (R5) is connected between VBUS and GND. The DC-DC converter's PWR_FLAG pin is connected to the PWR_FLAG pin of the microcontroller. The microcontroller's 5V pin is connected to the +5V output of the DC-DC converter. A 5V regulator (LM78M05) is also shown, connected to the +5V output of the DC-DC converter. Various capacitors (C1, C2, C3) and resistors (R35, R5) are used for filtering and current limiting. The circuit is labeled with component values and pin numbers.



CAN TERM jumpers

Sheet: /
File: cpNode-Xiao.kicad_sch

Title: cpNode Xiao

Size: USLetter	Date: 2026.07
KiCad E.D.A. 10.0.1	

John Plocher

Rev: 3.0

Id: 1/1

active