


Yellow

RS-485 Interface

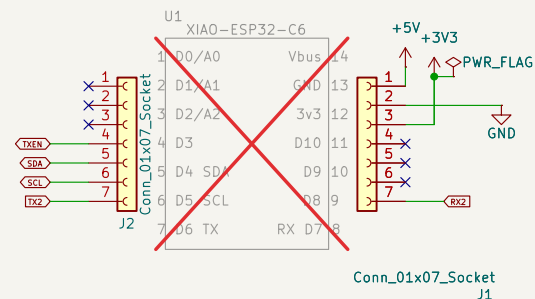

Power Supply

The diagram illustrates a power supply system for an LED display. It consists of the following components and connections:

- DC-DC Converter:** A DCJ0202 module converts the input +VDC to a regulated +5V output.
- Voltage Doubler:** A VR5.0 module converts the +5V output to a +10V output, labeled VBUS.
- LED Driver:** An LM78M05-T0252-2 module converts the +5V output to a regulated +2.5V output.
- LEDs:** Red (Rd1) and Green (Gd1) LEDs are connected to the VBUS and +2.5V outputs. The anodes are connected to VBUS, and the cathodes are connected to the +2.5V output.
- Resistors:** A 4k7 resistor (R5) is connected in series with the VBUS line. A 100mW resistor (R35) is connected in series with the +2.5V line.
- Grounding:** All components are connected to a common ground (GND).

Additional labels in the diagram include: +VDC, +5V, VBUS, PWR_FLAG, DCJ0202, 7.5-12VDC, 3A, Reverse Voltage Protection, (Max Vgs=+-20v, no zener needed), VR5.0, LM78M05-T0252-2, Rd1, Gd1, R5, R35, and 100mW.



Rev: 3.0
Id: 1/1