

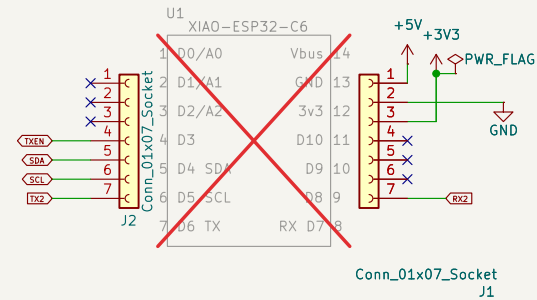



CMRI

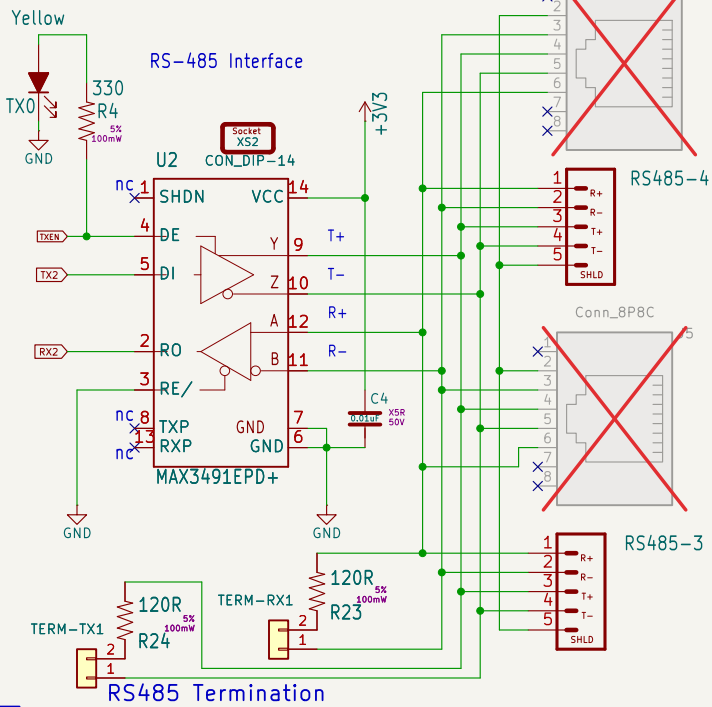

I2C

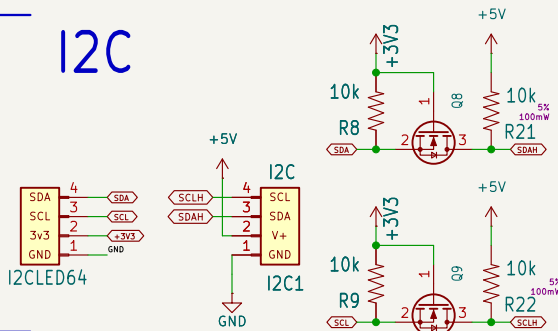

Power Supply

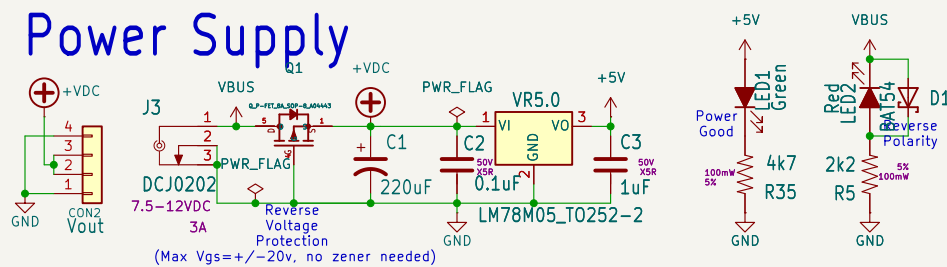

open hardware



Breaks out 5v I2C, I04 style headers and I2C OLED Display
Processor carrier board for ESP32-DEV

Sheet: /
File: cpNode-Xiao-68x90.kicad_sch

Designer: John Plocher

Title: cpNode Xiao

MRCS

Size: USLetter

Date: 2026.04

Rev: 3.0

KiCad E.D.A. 10.0.1

Id: 1/1