


Yellow


RS-485 Interface

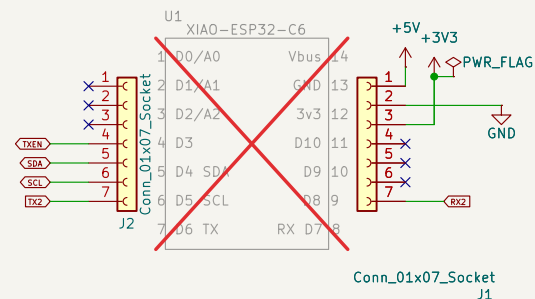

Power Supply

The diagram illustrates a power supply circuit for a microcontroller (MCU). The input is +VDC, which is connected to the DCJ0202 DC-DC converter. The converter's output is +5V, which is connected to the PWR_FLAG pin of the MCU. The circuit includes a MOSFET (Q1) and a diode (D1) for reverse voltage protection. The output is connected to a microcontroller (MCU) via a PWR_FLAG pin. The circuit also includes a reverse voltage protection diode (LED1) and a battery (BAT54) for reverse polarity protection. The output is connected to a microcontroller (MCU) via a PWR_FLAG pin.

(Max Vgs=+-20v, no zener needed)



CAN TERM jumpers

Sheet: /
File: cpNode-Xiao.kicad_sch

Title: cpNode Xiao

Size: USLetter	Date: 2026.07
KiCad E.D.A. 10.0.1	

John Plocher

Rev: 3.0

Id: 1/1

active