



Type977 fitting for heat pump SINK-7TE Parametric Heat Pump calculation

Dani Carbonell

dani. carbonell@spf.ch

2019/03/12 at: 16:07:27 h





Table 1: Fitted coefficients for the heat pump.

Coefficient	Description	
		[kW]
P_{Q_1}	1 st condenser polynomial coefficient	6.7730e+00
P_{Q_2}	2^{st} condenser polynomial coefficient	$6.1529e{+01}$
P_{Q_3}	3^{st} condenser polynomial coefficient	1.1538e + 01
P_{Q_4}	4^{st} condenser polynomial coefficient	2.4830e-01
P_{Q_5}	5^{st} condenser polynomial coefficient	-6.0042e+01
P_{Q_6}	6^{st} condenser polynomial coefficient	-6.4057e + 01
P_{COP_1}	1 st COP polynomial coefficient	5.6238e+00
P_{COP_2}	2^{st} COP polynomial coefficient	4.4616e + 01
P_{COP_3}	3 st COP polynomial coefficient	8.5794 e-01
P_{COP_4}	4 st COP polynomial coefficient	-1.9295e+01
P_{COP_5}	5 st COP polynomial coefficient	-9.4036e+01
P_{COP_6}	6 st COP polynomial coefficient	-8.2550e + 01
\dot{m}_{cond}	$1200.00 \ [kg/h]$	
\dot{m}_{evap}	$1200.00 \ [kg/h]$	
COP_{nom} (A0W35)	4.16	
$Q_{cond,nom}$ (A0W35)	6.67 [kW]	
$Q_{evap,nom}$ (A0W35)	5.07 [kW]	
$W_{comp,nom}$ (A0W35)	1.60 [kW]	
RMS_{COP}	6.01e - 02	
$RMS_{Q_{cond}}$	1.73e - 02	
$RMS_{W_{comp}}$	3.54e - 02	
Fit model	Average Temperature	





Table 2: Differences between experiments and fitted data for the heat pump. $error = 100 \cdot |\frac{Q_{exp} - Q_{num}}{Q_{exp}}|$ and $RMS = \sqrt{\sum \frac{(Q_{exp} - Q_{num})^2}{n_p}}$ where n_p is the number of data points.

$T_{cond,out}$	$T_{evap,in}$	COP	COP_{exp}	error	Q_{cond}	$Q_{cond,exp}$	error	W_{comp}	$W_{comp,exp}$	error
^{o}C	${}^{o}C$	[-]	[-]	[%]	[kW]	[kW]	[%]	[kW]	[kW]	[%]
35.00	-5.00	3.45	3.41	1.1	5.71	5.70	0.2	1.66	1.67	0.85
35.00	0.00	4.23	4.30	1.6	6.78	6.80	0.3	1.60	1.58	1.32
35.00	5.00	4.96	4.95	0.2	7.81	7.80	0.2	1.57	1.57	0.08
50.00	-5.00	2.24	2.16	3.5	5.40	5.37	0.6	2.41	2.48	2.82
50.00	0.00	3.00	3.02	0.7	6.45	6.47	0.2	2.15	2.14	0.52
50.00	5.00	3.71	3.63	2.4	7.48	7.47	0.2	2.02	2.06	2.08
45.00	-5.00	2.69	2.66	1.0	5.53	5.53	0.0	2.06	2.08	1.00
45.00	0.00	3.46	3.57	2.9	6.60	6.63	0.6	1.90	1.86	2.39
45.00	5.00	4.18	4.20	0.4	7.63	7.63	0.0	1.82	1.82	0.36
55.00	0.00	2.49	2.60	4.4	6.28	6.30	0.3	2.52	2.42	4.25
55.00	5.00	3.19	3.17	0.6	7.30	7.30	0.1	2.29	2.30	0.55
35.00	10.00	5.65	5.61	0.7	8.82	8.80	0.2	1.56	1.57	0.52
35.00	15.00	6.28	6.26	0.2	9.79	9.80	0.1	1.56	1.56	0.32
50.00	10.00	4.38	4.28	2.3	8.49	8.47	0.3	1.94	1.98	1.99
50.00	15.00	5.00	5.00	0.1	9.47	9.47	0.0	1.89	1.90	0.11
45.00	10.00	4.86	4.87	0.2	8.64	8.63	0.1	1.78	1.77	0.28
45.00	15.00	5.48	5.57	1.5	9.62	9.63	0.2	1.75	1.73	1.38
55.00	10.00	3.86	3.81	1.3	8.31	8.30	0.1	2.16	2.18	1.14
55.00	15.00	4.47	4.51	1.0	9.29	9.30	0.1	2.08	2.06	0.84
Sum				26.3			3.8			22.80
RMS_{COP}	6.01e - 02									
RMS_{O}	1.73e - 02									
$RMS_{W_{comp}}$	3.54e - 02									





${\it Meier/SINK-7TE/SINK-7TE-Qcond.pdf}$

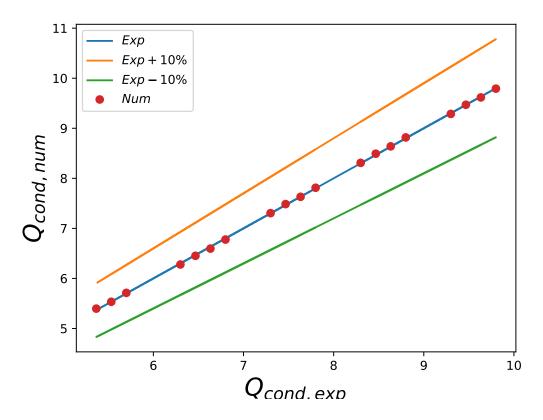


Figure 1: Q_{cond} differences between experiments and fitted data





${\it Meier/SINK-7TE/SINK-7TE-Qcomp.pdf}$

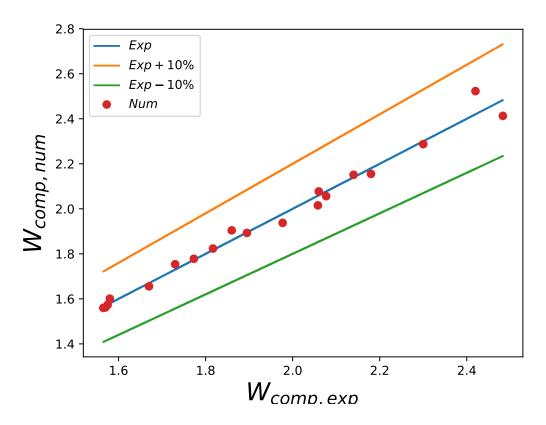


Figure 2: W_{comp} differences between experiments and fitted data





${\it Meier/SINK-7TE/SINK-7TE-COP.pdf}$

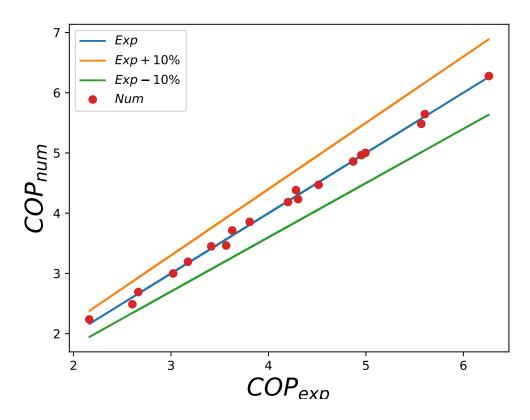


Figure 3: COP differences between experiments and fitted data