



PRODUCTION SINCE 2004


Fiber laser cutting machine

LX3015FC-3000W

Machine Detail

L X S H O W L A S E R

MACHINE MODEL	QUANTITY (SET)	EXW PRICE (USD)	Warranty
LX3015FC-3000W	1	13895 USD	3 years
Machine frame	☒ New design of our company ☒ CE standard Heavy duty machine frame ☒ Aviation Aluminum gantry		
Controller	☒ Controller Bochu Fscut 2000E ☒ Industrial CPU+cantilever #DSP		
Laser system	☒ Fiber laser source Raycus CE version 3kw ☒ Laser cutting head Bochu BLT310		
Transmission system	☒ Italy WKTe/PEK Linear Square rails+YBL /J&T TAIWAN Gear ☒ Z axis TBI ball screw transmission		
Driver system	☒ Inovance servo motor ☒ Italy MOTOVARIO/ DESBOER Reducer		
Auxiliary equipment	☒ S&A/ Tongfei/ Hanli Water chiller ☒ Lubrication system		
Other important parts	☒ SMC Proportional valve to control gas pressure ☒ Solenoid valve, control gas switch ☒ France Schneider Electric Device		
Consumable parts	☒ 10xCutting nozzle ☒ 5xProtective Mirrors		
Service	☒ Manual +Video ☒ Three-year warranty ☒ 24 hours online service		
Dimension (L*W*H)mm	4300*2250*2000	N.W/Kg	2250KG
CBM(m3)/set	19.35 CBM	G.W(kg)	2300KG
Packing	20GP	Delivery time	30 work days
Payment	Alibaba Trade Assurance, T/T, Western Union, L/C		

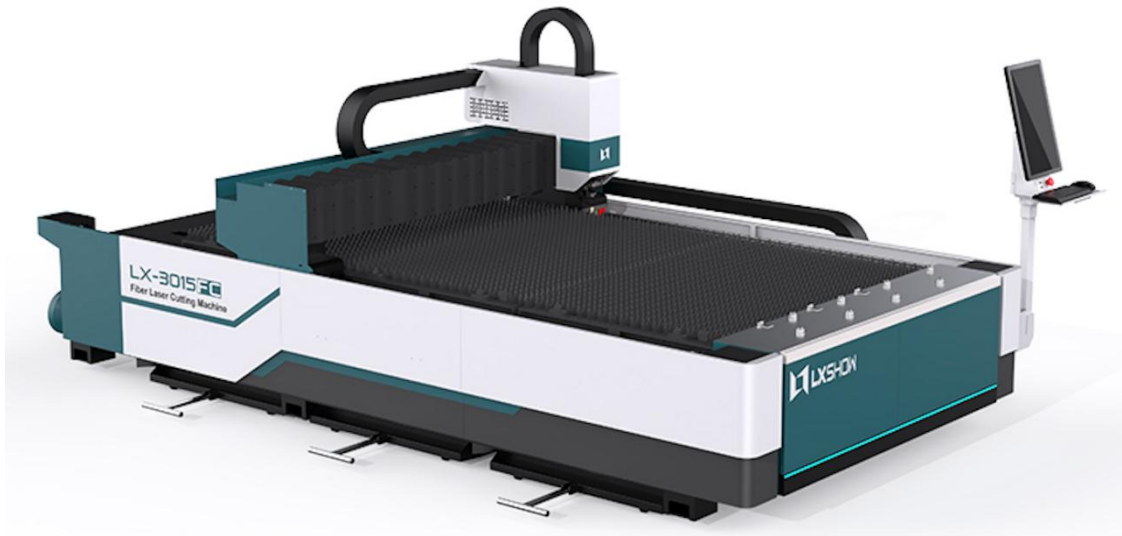

Website: <https://www.lxslaser.com/lx3015fc-2024-new-standards-affordable-laser-cutting-machine-product/>



Sheet metal cutting video: <https://youtu.be/XyNlrASL8p4>



Parameter

L X S H O W L A S E R

Model	LX3015FC-3000W
Working Area	1500*3000mm
Laser Power	3000W
Laser Generator	Raycus
Laser Wave Length	1064nm
Working Table	Sawtooth
Maximum Idle Running Speed	120m/min
Maximum acceleration	1.0G
Position Accuracy	±0.03mm/m
Repeat Positional Accuracy	±0.02mm
Control System	Bochu Fscut 2000E
Position Type	red dot
Working Voltage	380V /50Hz
Auxiliary Gas	oxygen,nitrogen,air
Working life of fiber module	More than 100000 hours
Fiber laser cutting head	Boci BLT310
Cooling System	S&A/ Tongfei/ Hanli industrial water chiller
Work Environment	0-45°C, Moisture 45-85%
Delivery time	20work days (According to actual season)

Cutting Data

L X S H O W L A S E R

Material	Power	1000W	1500W	2000W	3000W	4000W	6000W	8000W	10000W	12000W	15000W	20000W	30000W
	Thickness	Speed[m/min]											
CS	1	15	15-20	23-28	28-35	36-50	45-60	40-50	40-45	50-60	50-60		
	2	6	4-5	6-8	16-20	18-22	35-40	25-30	30-35	45-50	45-48		
	3	2.5-3.2	3-4	3-4	3.2-3.6	8-12	22-27	20-25	25-30	40-45	30-38		
	4	2.3-2.8	2.3-2.8	2.5-3.0	3-3.2	3-3.5	15-20	15-18	18-20	30-35	26-29		
	5	1.8-2.1	1.8-2.3	2.2-2.6	2.7-3	2.9-3.2	9-12	10-12	13-15	20-28	20-23	23-28	24-30
	6	1.2-1.5	1.6-2.0	1.8-2.0	2.2-2.5	2.7-2.8	8-10	8-9	10-12	16-20	17-19	18-20	25-28
	8	1-1.1	1.2-1.5	1.2-1.6	1.8-2.2	2.4-2.5	2.2-2.4	5-5.5	7-8	12-15	10-12	14-16	18-22
	10	0.6-0.8	0.9-1.2	1.0-1.2	1-1.3	1.9-2.1	2.0-2.2	2.3	3.5-4.5	8-9	7-8	9-12	14-17
	12		0.8	0.8-1.0	0.9-1	1.2-1.5	1.9-2.1	1.8-2	1.8-2	5-6.5	5-6	8-10	11-13
	14		0.6	0.6-0.75	0.8-0.9	0.9-1	1.4-1.6	1.6-1.8	1.6-1.8	3-3.2	4.5-5.5	6-8	8-10
	16			0.6-0.7	0.6-0.7	0.7-0.9	1.2-1.4	1.4-1.6	1.4-1.6	2.8-3	3-3.5	5-6	7.5-8.5
	20				0.5-0.55	0.55-0.65	0.6-0.8	1-1.2	1.2-1.4	2-2.3	2.5-2.8	2.7-3.2	5-5.5
	22				0.5	0.5-0.6	0.5-0.6						
	25					0.4-0.5	0.4	0.3-0.45	0.5-0.65	1.1-1.3	1.6-1.9	2.4-2.6	3-3.5
	30						0.3	0.2-0.25	0.3-0.35	0.9-1	1.2-1.3	1.7-1.9	2.2-2.6
	40							0.1-0.15	0.2	0.3-0.35	0.3-0.35	1-1.2	1-1.4
	60										0.18-0.2	0.2-0.25	0.2-0.25
	80											0.12-0.15	0.12-0.15
SS	1	15-20	20-25	25-28	28-35	42-55	45-60	40-50	45-50	50-60	50-60	50-60	50-60
	2	4-6	8-10	9-15	18-24	21-28	35-45	30-35	35-40	45-50	45-50	50-60	50-60
	3	2.5-3	4.5-5.5	6-7	7-10	9-12	22-27	20-24	25-30	40-45	35-38	40-45	40-50
	4	1-1.5	3.0-3.5	2.8-3.5	5-6.5	6.5-8	15-20	15-18	18-20	35-40	25-29	30-35	35-40
	5		1.5-2.0	1.5-2.5	3-3.6	5-5.5	9-12	9-10	12-15	25-30	18-22	22-24	25-30
	6		0.7-0.9	1.0-1.5	2-2.7	3-3.4	8-11	7-8	8-9	15-20	15-18	18-22	22-25
	8				1-1.2	1.5-2	3.5-4.5	4-5	5-6	12-15	10-12	13-16	18-22
	10				0.5-0.6	1.2-1.5	2-2.5	3-3.5	3.5-4	8-10	8-9	10-12	14-18
	12					0.8	1.5-1.8	2-2.5	2.5-3	5-6	6-7	8-10	12-14
	14						1-1.5	1.5-2	2-2.5	3.5-4	4-4.2	6-8	8-10
	16						0.5-0.6	1-1.5	1.6-2	2-2.5	2.6-2.8	5-6	7.5-8.5
	18						0.3-0.5	0.8-1	1.2-1.5	1.3-1.5	2-2.3	3.2-4	6-7
	20						0.2-0.25	0.6-0.8	1-1.2	1.2-1.4	1.8-2	3-3.2	5-6
	30							0.15-0.2	0.25	0.25-0.3	0.6-0.7	1-1.2	1.5-2
	40								0.15	0.15-0.2	0.3-0.4	0.5-0.8	0.6-0.8
	50										0.2-0.25	0.2-0.3	0.2-0.3
	60											0.15-0.2	0.15-0.2
	80											0.08-0.1	0.08-0.1
	100											0.04-0.05	0.04-0.05

Material	Power Thickness [mm]	1000W	1500W	2000W	3000W	4000W	6000W	8000W	10000W	12000W	15000W	20000W	30000W
		Speed[m/min]											
AL	1	10-15	12-16	20-25	25-30	35-40	45-60	40-45	45-50	50-60	48-52	55-60	55-60
	2	4-5	4.0-5.0	8-13	15-18	18-22	35-40	25-30	25-30	35-40	35-38	40-45	40-45
	3	1-1.5	1.5-2.5	4-4.5	7-8	8-10	22-27	22-25	20-25	30-35	25-27	30-35	30-35
	4		1.0-1.3	2.5-3.0	5-6	6-7	14-17	12-15	18-20	25-30	20-22	25-30	25-30
	5			1.5-2	2.5-3	4-5	9-11	8-10	14-16	20-25	15-17	18-20	18-25
	6				1.5-2	2.5-3	4-6	6-7	8-9	14-18	12-14	16-18	18-20
	8				0.6-0.7	1-1.2	2.5-3	3.5-4	5-6	7-9	8-9	10-12	15-18
	10					0.8	1.5-1.8	2-2.5	4-4.5	5-7	5-7	9-10	12-15
	12						0.8-1	1.6-2	1.6-2	3-4	2.5-3.5	5-6	10-12
	14						0.6-0.7	1-1.2	1.2-1.5	1.8-2.8	2-3	4-5	8-10
	16						0.35-0.45	0.8-1	1-1.2	1.5-1.8	1.5-2.5	3-4	6-8
	18							0.7-0.8	0.8-1	1-1.5	1.3-1.8	2-3	3-4
	20						0.2-0.3	0.5-0.6	0.6-0.8	0.8-1.2	0.8-1.2	1.5-2	2-3
	25							0.4-0.5	0.5-0.6	0.5-0.7	0.5-0.7	1-1.2	1.5-2
	30							0.2	0.25-0.45	0.4-0.5	0.4-0.5	0.8-1	0.8-1
	40								0.15-0.2	0.25-0.3	0.25-0.3	0.5-0.8	0.5-0.8
	50										0.2-0.25	0.4-0.6	0.4-0.6
	60											0.2-0.3	0.2-0.3
Brass	1	8-10	12-15	13-15	20-28	30-35	45-55	30-40	35-40	40-50	38-40	40-45	40-45
	2	2-2.5	4.0-5.0	5-7	10-15	15-18	30-35	25-27	22-27	35-45	32-37	35-40	35-40
	3	0.8-1.0	1.5-2.0	2.5-3	5-6	7.5-9	18-25	15-18	15-20	25-30	20-24	28-30	28-30
	4			1-1.3	2.5-3	5-6	12-15	10-11	12-15	20-25	16-19	19-22	20-25
	5				1.8-2.2	3-4	4.5-6	7-8	10-11	16-20	13-16	18-19	18-20
	6				0.8-1	2-2.5	3.5-4	6-6.5	6-7	12-15	9-11	12-15	15-18
	8					0.8-1	2-2.6	2.5-3	4-5	6-8	6-8	8-10	10-15
	10						1-1.3	1-1.5	3.5-4	4-5.5	5-6	7-8	8-10
	12						0.6-0.8	0.8-1	1.6-2	1.8-2	2-2.2	2.5-3.5	5-8
	14							0.7-0.8	0.8-1	1.2-1.4	1.4-1.6	2-2.5	3-5
	16							0.6	0.5-0.7	0.8-1	1.2-1.3	1.5-2	1.5-2
	18										1-1.2	1.2-1.5	1.2-1.5
	20										0.6-0.7	0.8-1	0.8-1
Copper	1						25-30	25-30	25-30	30-35	25-30	25-30	25-30
	2						13-16	16-20	16-20	25-30	20-25	25-30	25-30
	3						8-10	12-14	12-15	18-22	18-20	20-25	20-25
	4						5-6	7-8	8-10	12-15	12-14	16-18	18-20
	5						3-4	4-5	5-6	7-9	8-9	10-12	15-18
	6						1.5-2.5	2.5-3	3.5-4	5-6	6-7	8-10	10-15
	8							1-1.5	1.5-2	2.5-3	2.5-3.5	4-6	6-10
	10							0.5-0.7	0.5-0.7	1.2-1.5	1.5-2	2-3.5	2-3.5
	12											2-2.5	2-2.5
	14												1.5-2

Main Parts

|| LXSHOW LASER ||



Heavy duty machine frame

- To optimize the design of the sectional welding lathe bed Lathe bed in the middle of reinforcing bar
- Improves the lathe bed stability
- Prevent deformation of lathe bed




Aviation aluminum gantry

- Aerospace grade aluminum light quality
- High speed, good dynamic response, fast acceleration
- Beam as a whole by the finite element analysis optimization of high rigidity
- Lightweight design, durable



Z axis ball screw transmission

- Smooth movement: has a high efficiency than the sliding screw, the required torque is only 30% or less.
- No backlash and high rigidity, using the Gothic full groove shape, the axial directly, Shaft clearance can be adjusted to a minimum level and can be easily rotated.

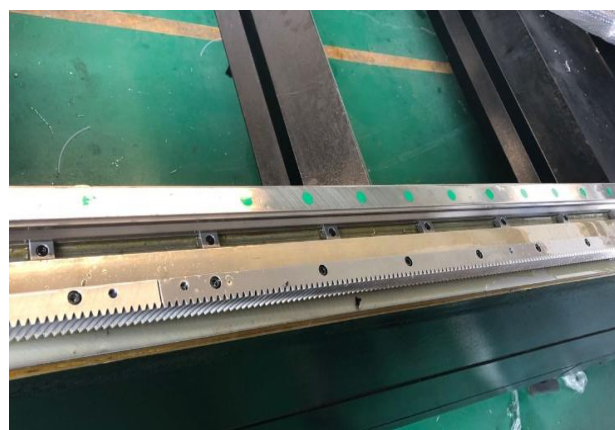

Italy WKT/PEK rails

- The rolling guide wear is very small, can maintain accuracy for a long time.
- The friction is very small, the power loss is small; the heat generated during operation is extremely small, and it can run at high speed.




Inovance servo motor

- The highest amplifier responsiveness, greatly shorter the settling time.
- High efficiency vibration suppression function, greatly improves the follow-up performance, reduces the vibration during driving the vibration of the front part of the machine when stopped.



Raycus laser generator

- Famous laser brand all over the world
- High electronic-optical conversion efficiency, good beam quality, wide modulation frequency, high reliability, long life and maintenance-free.
- The center wavelength is 1080nm $\pm$ 5.

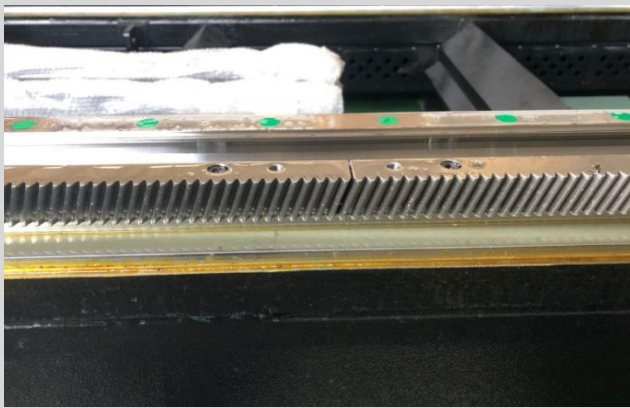


YBL /JT Gear

- Longer service life, more stable, higher speed and higher reliability.
- It can ensure constant transmission ratio, can pass any angle between the two axis movement.



Boci BLT310 cutting head

- Boci famous laser cutting head.
- Boci laser head autofocus adjustment, which is suitable for 3kw and over it.
- Excellent cutting control ability

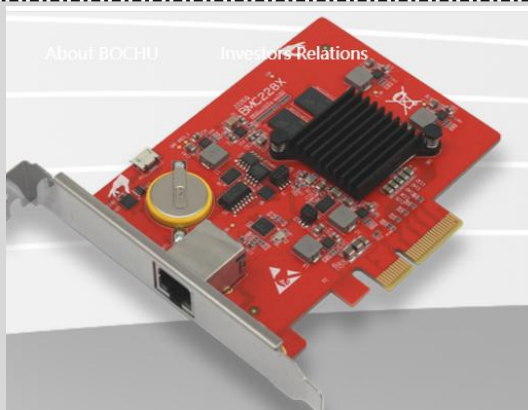


Bochu Fscut2000E controller

- Bochu controller is designed for sheet metal processing industry launched a full-featured open loop control system.
- Easy installation, easy adjustment, excellent performance, complete solutions.
- Automatic side patrol function, automatic obstacle avoidance function, auto nesting function for free.



Schneider electric element

- Electrical components are famous brands, which is popular in market.
- Stable work ability.

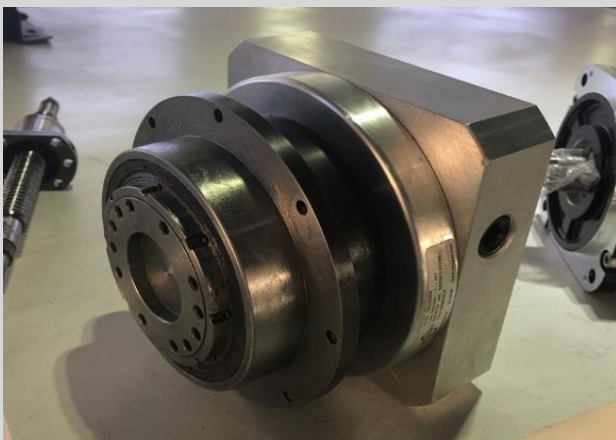

DESBOER/Italy MOTOVARIO

- The lowest backlash.
- The maximum output torque.
- The highest torsion rigidity
- High efficiency high quality low noise ,lift time lubrication
- High precision, long life.



S&A/Hanli water chiller

- Relative leading product technology(complete laboratory and performance testing means), product specifications and actual performance good consistency.
- With multiple after-sales office in china and abroad, product service is more real-time and reliable.




Industry CPU + cantilever

- Easy operation.
- Big screen.



Oil lubrication

- Lubricating oil system
- Safe and economical

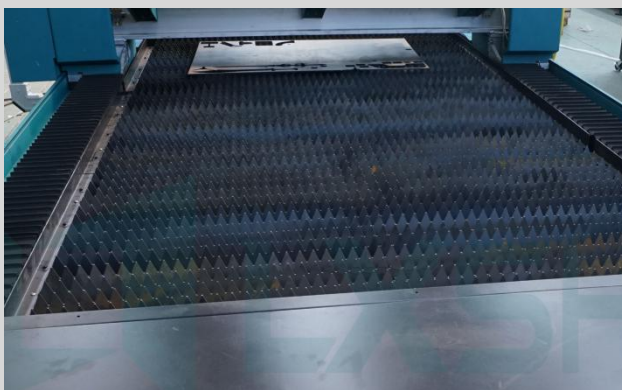

Sawteeth table

- Effectively support the board
- Achieve maximum bench life
- Can be disassembled for easy replacement

Optional Parts

L X S H O W L A S E R



Air purifier

- Can meet the dust-free requirements of the workshop
- Completion of regional environmental protection requirements
- High performance, good dust removal effect



3kw exhaust fan

- Simple dust removal,
- Economical and practical




15kw air compressor

- Air compressor for laser cutting machine
- Economical and fast cutting of carbon steel, stainless steel

Consumable Parts

L X S H O W L A S E R

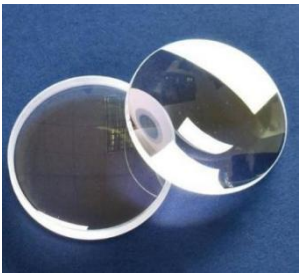Consumable parts	Picture	Using life	Give together with machine
1.Protective lens		300-500hours	5 set (We advise to order extra 40 sets as spare part)
2.Cutting Nozzle		300-500hours	10 set (We advise to order extra 35 sets as spare part)
3.Ceramic ring		4000-5000 hours	1 set (We advise to order extra 4 sets as spare part)
4.Focusing lens		4000-5000 hours	1 set (We advise to order extra 3 sets as spare part)
5.Collimating lens		4000-5000 hours	1 set (We advise to order extra 3 sets as spare part)

Samples

L X S H O W L A S E R



Cost Analysis

|| L X S H O W L A S E R ||

Laser power	Assisted gas + Consumption	Air(stainless steel)	O2 (stainless steel)	N2(stainless steel)
1000W	Laser power	2.2KW	2.2KW	2.2KW
	Water Chiller Group	2.8KW	2.8KW	2.8KW
	Host Machine	5.4KW	5.4KW	5.4KW
	Dust Exhausting Equipment	3KW	3KW	3KW
	Total Power	13.4KW	13.4KW	13.4KW
	Average Power Consumption (Take80% Cutting Efficiency)	13.4x80%=10.72KW	13.4x80%=10.72KW	13.4x80%=10.72KW
	Gas Consumption	150L/h	30L/h	150L/h
2000W	Laser power	5KW	5KW	5KW
	Water Chiller Group	3.1KW	3.1KW	3.1KW
	Host Machine	6KW	6KW	6KW
	Dust Exhausting Equipment	3KW	3KW	3KW
	Total Power	17.1KW	17.1KW	17.1KW
	Average Power Consumption (Take80% Cutting Efficiency)	17.1x80%=13.68KW	17.1x80%=13.68KW	17.1x80%=13.68KW
	Gas Consumption	150L/h	30L/h	150L/h
3000W	Laser power	7.5KW	7.5KW	7.5KW
	Water Chiller Group	5KW	5KW	5KW
	Host Machine	6KW	6KW	6KW
	Dust Exhausting Equipment	3KW	3KW	3KW
	Total Power	21.5KW	21.5KW	21.5KW
	Average Power Consumption (Take80% Cutting Efficiency)	21.5x80%=17.2KW	21.5x80%=17.2KW	21.5x80%=17.2KW
	Gas Consumption	200L/h	30-40L/h	150-200L/h
4000W	Laser power	10KW	10KW	10KW
	Water Chiller Group	6.5KW	6.5KW	6.5KW
	Host Machine	6KW	6KW	6KW
	Dust Exhausting Equipment	3KW	3KW	3KW
	Total Power	25.5W	25.5W	25.5W
	Average Power Consumption (Take80% Cutting Efficiency)	25.5x80%=20.4KW	25.5x80%=20.4KW	25.5x80%=20.4KW
	Gas Consumption	200L/h	30-40L/h	150-200L/h
6000W	Laser power	15KW	15KW	15KW
	Water Chiller Group	8KW	8KW	8KW
	Host Machine	8KW	8KW	8KW
	Dust Exhausting Equipment	3KW	3KW	3KW
	Total Power	34KW	34KW	34KW
	Average Power Consumption (Take80% Cutting Efficiency)	34x80%=27.2KW	34x80%=27.2KW	34x80%=27.2KW
	Gas Consumption	200L/h	30-40L/h	150-200L/h

	Gas Consumption	200L/h	30-50L/h	150-220L/h
Laser power	Assisted gas + Consumption	Air(stainless steel)	O2 (stainless steel)	N2(stainless steel)
8000W	Laser power	20KW	20KW	20KW
	Water Chiller Group	9KW	9KW	9KW
	Host Machine	8KW	8KW	8KW
	Dust Exhausting Equipment	3KW	3KW	3KW
	Total Power	40KW	40KW	40KW
	Average Power Consumption (Take80% Cutting Efficiency)	40x80%=32KW	40x80%=32KW	40x80%=32KW
	Gas Consumption	200L/h	30-50L/h	150-220L/h
10000W	Laser power	25KW	25KW	25KW
	Water Chiller Group	10KW	10KW	10KW
	Host Machine	10KW	10KW	10KW
	Dust Exhausting Equipment	3KW	3KW	3KW
	Total Power	48KW	48KW	48KW
	Average Power Consumption (Take80% Cutting Efficiency)	48x80%=38.4KW	48x80%=38.4KW	48x80%=38.4KW
	Gas Consumption	200L/h	30-50L/h	150-220L/h
12000W	Laser power	30KW	30KW	30KW
	Water Chiller Group	12KW	12KW	12KW
	Host Machine	10KW	10KW	10KW
	Dust Exhausting Equipment	3KW	3KW	3KW
	Total Power	55KW	55KW	55KW
	Average Power Consumption (Take80% Cutting Efficiency)	55x80%=44KW	55x80%=44KW	55x80%=44KW
	Gas Consumption	200L/h	30-50L/h	150-220L/h
15000W	Laser power	37.5KW	37.5KW	37.5KW
	Water Chiller Group	15KW	15KW	15KW
	Host Machine	10KW	10KW	10KW
	Dust Exhausting Equipment	3KW	3KW	3KW
	Total Power	65.5KW	65.5KW	65.5KW
	Average Power Consumption (Take80% Cutting Efficiency)	65.5x80%=52.4KW	65.5x80%=52.4KW	65.5x80%=52.4KW
	Gas Consumption	200L/h	30-50L/h	150-240L/h
20000W	Laser power	50KW	50KW	50KW
	Water Chiller Group	20KW	20KW	20KW
	Host Machine	15KW	15KW	15KW
	Dust Exhausting Equipment	3KW	3KW	3KW
	Total Power	88KW	88KW	88KW
	Average Power Consumption (Take80% Cutting Efficiency)	88x80%=70.4KW	88x80%=70.4KW	88x80%=70.4KW
	Gas Consumption	200L/h	30-50L/h	150-240L/h

Laser power	Assisted gas + Consumption	Air(stainless steel)	O2 (stainless steel)	N2(stainless steel)
30000W	Laser power	75KW	75KW	75KW
	Host Machine	16KW	16KW	16KW
	Dust Exhausting Equipment	6KW	6KW	6KW
	Gas Consumption	200L/h	30-50L/h	150-300L/h
40000W	Laser power	100KW	100KW	100KW
	Host Machine	16KW	16KW	16KW
	Dust Exhausting Equipment	6KW	6KW	6KW
	Gas Consumption	200L/h	30-50L/h	150-300L/h
50000W	Laser power	125KW	125KW	125KW
	Host Machine	16KW	16KW	16KW
	Dust Exhausting Equipment	6KW	6KW	6KW
	Gas Consumption	200L/h	30-50L/h	150-300L/h



Quality Inspection


|| LXSHOW LASER ||



A Incoming inspection



B Rail installation inspection

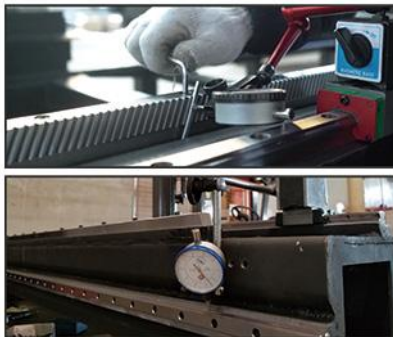

C Rail installation inspection



D Gantry verticality detection



E 36 hours of continuous running aging



F All parts inspection before packing



G Packing and shipping



H Training and Feedback

Production Lines

L X S H O W L A S E R



Precision carbon dioxide protection



Grinding and spraying



**600°C high temperature annealing
treatment for stress relief**



**5 axis large gantry pentahedron
processing**





About LXSHOW

LXSHOW LASER

As the largest manufacturer of laser application and intelligent equipment development in northern China .Jinan LXSHOW Laser Equipment Co.,Ltd is the leading brand in innovation and upgrades of laser equipment and it aims to provide high quality service in the global laser intelligence.

Since its foundation in 2004, LXSHOW Laser has always adhered to the principle of Technology as the Foundation, "Quality First". With customer-center idea as its basis, it takes every detail seriously in the process of production to ensure high performance and quality of each equipment as well as the stable operation in more than 150 nations around the world.



Advantage

LXSHOW LASER

LXSHOW Laser takes Hanyu Jingu as its corporate headquarters. It has built plants successively in Pingyin Jinan, which provides an excellent basis for arranging laser equipment' industry chain for the ultimate purpose of offering stable and effective service of intelligent equipment.

In the era of industry 4.0, LXSHOW Laser is striving to provide basic equipment and customized solution for the future industrial production, also to help enterprises increase productivity.



Own factory



service



Team



Production experience



Research and development

Certification



Patent certificate



Honor certificate





After-sales Service

|| LXSHOW LASER ||

1. The warranty of the machine is 3 years and the laser generator is 2 years. (Excluding wearing parts). The time is from machine finished date told by Party B.
2. Lifetime maintenance free of charge.
3. Free training course at our plant.
4. Specialized after-sales service group 24 hours online each day, to provide free technical support by email, whatsapp, wechat and so on.
5. Machine has been tested and adjusted before delivery, you can use the machine directly after receiving it.
6. About installation, because we ship the machine by a full container we won't disassemble too much parts, the main parts that need to connect is laser source, water chiller and controller. We have detailed manual and videos, if you don't understand, our after-sales service man can guide you hand by hand, video call is available.




Customer

LXSHOW LASER



Customer feedback

On-site installation

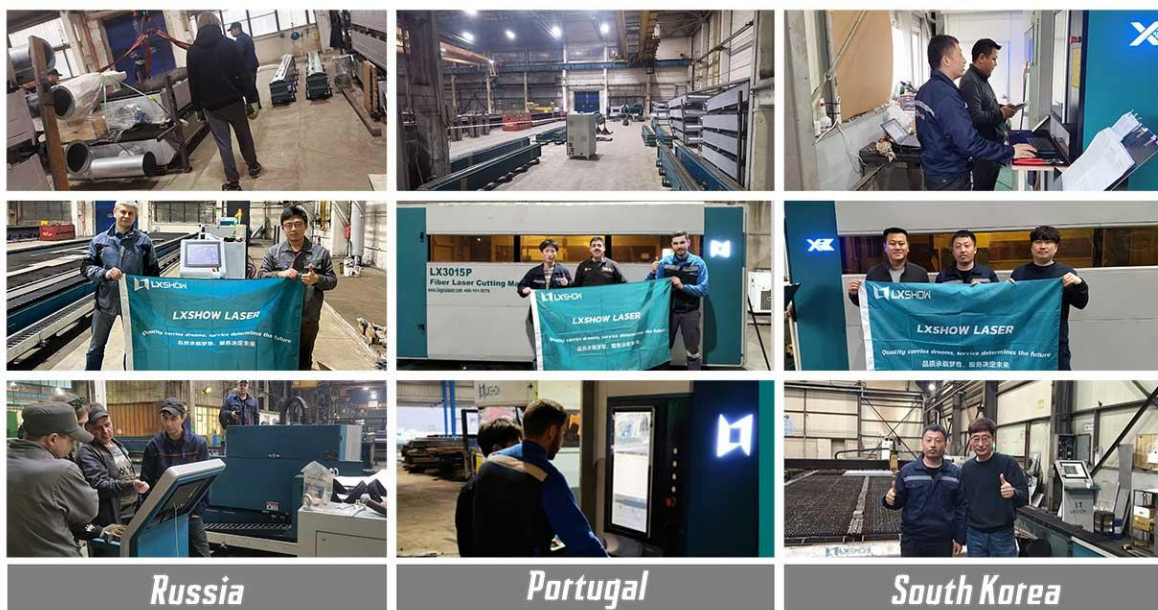

Russia

Portugal

South Korea

International service

Sales manager: Vivien

After service manager: Tom

Email

export57@lxshow.net

export11@linkcnc.com

Mobile/Whatsapp/WeChat

+86-18053113405

+86-151 0698 8612

CONTACT US