


LH853 CPBK

Lever Handle

Lever Handles

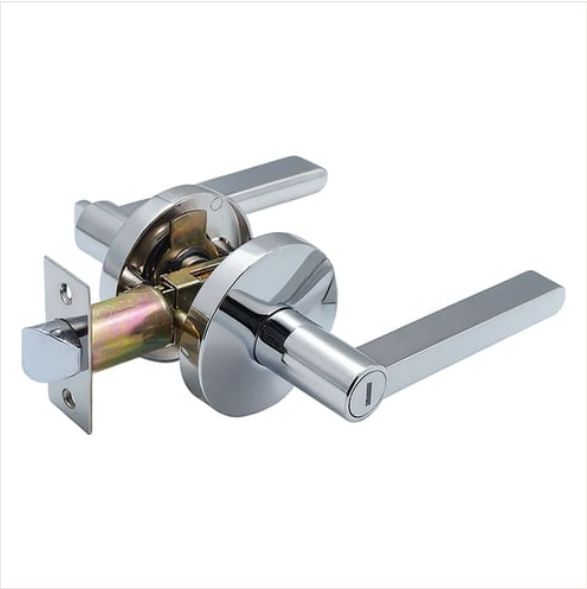

Specifications

Material	Zinc alloy
Backset	60mm
Door thickness	35mm to 45mm adjustable
Cycle life	200,000 cycles
Chassis	Solid steel, zinc plated for corrosion resistance
Trim	Zinc die-casting electro-plated or solid brass
Handing	Fully reversible, left or right hand
Function	Privacy, bathroom, turn button inside
Keying	Can be keyed alike with deadbolts, or master keyed
Finish	Chrome Plated
Application	For entrance doors

Features

- Economical and easy to install, ideal for residential use
- Key or thumb-turn locks/unlocks both levers
- Turn thumb-turn counterclockwise or key clockwise to lock; reverse to unlock
- Zinc-plated steel chassis and latch for corrosion resistance
- Exposed trim available in stainless steel or brass

Finish codes

■ CP

Confirm on order

Not stated in our published data, so confirm on the order: fixing-hole positions, order code per finish.

As published on [cantonlock.com](https://www.cantonlock.com). The order confirmation is the binding specification.