





WASTE PAPER COMBUSTION FOR STEAM POWERED ELECTRICITY

A MINOR PROJECT-III REPORT

Submitted by

HARSHINI S 927622BEC071

MADHUBALA V 927622BEC105

MANIMEGALAI M 927622BEC110

NANDHINI S R 927622BEC129

BACHELOR OF ENGINEERING

in

DEPARTMENT OF ELECTRONICS AND COMMUNICATION ENGINEERING

M.KUMARASAMY COLLEGE OF ENGINEERING

(Autonomous)

KARUR – 639 113

DECEMBER 2024

M.KUMARASAMY COLLEGE OF ENGINEERING, KARUR

BONAFIDE CERTIFICATE

Certified that this 18ECP105L - Minor Project III report "WASTE PAPER COMBUSTION FOR STEAM POWERED ELECTRICITY" is the Bonafide work of "Harshini S-927622BEC071, Madhubala V-927622BEC105, Manimegalai M-927622BEC110, Nandhini S R-927622BEC129" who carried out the project work under my supervision in the academic year 2024 - 2025 ODD.

SIGNATURE

SIGNATURE

Dr.A.KAVITHA, B.E., M.E., Ph.D.,	Dr.E.DINESH, B.E., M.E., Ph.D.,		
HEAD OF THE DEPARTMENT,	SUPERVISOR,		
Professor,	Associate Professor,		
Department of Electronics and	Department of Electronics and		
Communication Engineering,	Communication Engineering,		
M.Kumarasamy College of Engineering,	M.Kumarasamy College of Engineering,		
Thalavapalayam,	Thalavapalayam,		
Karur-639113.	Karur-639113.		
This report has been submitted for the 18ECP105L – Minor Project III final review held at M.			
Kumarasamy College of Engineering, Karur on			

PROJECT COORDINATOR

INSTITUTION VISION AND MISSION

Vision

To emerge as a leader among the top institutions in the field of technical education.

Mission

M1: Produce smart technocrats with empirical knowledge who can surmount the global challenges.

M2: Create a diverse, fully -engaged, learner -centric campus environment to provide quality education to the students.

M3: Maintain mutually beneficial partnerships with our alumni, industry and professional associations

DEPARTMENT VISION, MISSION, PEO, PO AND PSO

Vision

To empower the Electronics and Communication Engineering students with emerging technologies, professionalism, innovative research and social responsibility.

Mission

M1: Attain the academic excellence through innovative teaching learning process, research areas & laboratories and Consultancy projects.

M2: Inculcate the students in problem solving and lifelong learning ability.

M3: Provide entrepreneurial skills and leadership qualities.

M4: Render the technical knowledge and skills of faculty members.

Program Educational Objectives

PEO1: Core Competence: Graduates will have a successful career in academia or industry associated with Electronics and Communication Engineering

PEO2: Professionalism: Graduates will provide feasible solutions for the challenging problems through comprehensive research and innovation in the allied areas of Electronics and Communication Engineering.

PEO3: Lifelong Learning: Graduates will contribute to the social needs through lifelong learning, practicing professional ethics and leadership quality

Program Outcomes

PO 1: Engineering knowledge: Apply the knowledge of mathematics, science, engineering fundamentals, and an engineering specialization to the solution of complex engineering problems.

PO 2: Problem analysis: Identify, formulate, review research literature, and analyze complex engineering problems reaching substantiated conclusions using first principles of mathematics, natural sciences, and engineering sciences.

PO 3: Design/development of solutions: Design solutions for complex engineering problems and design system components or processes that meet the specified needs with appropriate consideration for the public health and safety, and the cultural, societal, and environmental considerations.

PO 4: Conduct investigations of complex problems: Use research-based knowledge and research methods including design of experiments, analysis and interpretation of data, and synthesis of the information to provide valid conclusions.

PO 5: Modern tool usage: Create, select, and apply appropriate techniques, resources, and modern engineering and IT tools including prediction and modeling to complex engineering activities with an understanding of the limitations.

- **PO 6: The engineer and society:** Apply reasoning informed by the contextual knowledge to assess societal, health, safety, legal and cultural issues and the consequent responsibilities relevant to the professional engineering practice.
- **PO 7: Environment and sustainability:** Understand the impact of the professional engineering solutions in societal and environmental contexts, and demonstrate the knowledge of, and need for sustainable development.
- **PO 8: Ethics:** Apply ethical principles and commit to professional ethics and responsibilities and norms of the engineering practice.
- **PO 9: Individual and team work:** Function effectively as an individual, and as a member or leader in diverse teams, and in multidisciplinary settings.
- **PO 10: Communication:** Communicate effectively on complex engineering activities with the engineering community and with society at large, such as, being able to comprehend and write effective reports and design documentation, make effective presentations, and give and receive clear instructions.
- **PO 11: Project management and finance:** Demonstrate knowledge and understanding of the engineering and management principles and apply these to one's own work, as a member and leader in a team, to manage projects and in multidisciplinary environments.
- **PO 12: Life-long learning:** Recognize the need for, and have the preparation and ability to engage in independent and life-long learning in the broadest context of technological change.

Program Specific Outcomes

PSO1: Applying knowledge in various areas, like Electronics, Communications, Signal processing, VLSI, Embedded systems etc., in the design and implementation of Engineering application.

PSO2: Able to solve complex problems in Electronics and Communication Engineering with analytical and managerial skills either independently or in team using latest hardware and software tools to fulfil the industrial expectations.

Abstract	Matching with POs,PSOs
Waste	PO1, PO2, PO3, PO4, PO5, PO6, PO7, PO8, PO9,
management,	PO10, PO11, PO12, PSO1, PSO2
Combustion	
efficiency, Energy	
recovery,	
Burning process,	
Waste reuse	

ACKNOWLEDGEMENT

Our sincere thanks to **Thiru.M.Kumarasamy**, **Founder** and **Dr.K.Ramakrishnan**, **Chairman** of **M.Kumarasamy** College of Engineering for providing extraordinary infrastructure, which helped us to complete this project in time.

It is a great privilege for us to express our gratitude to **Dr.B.S.Murugan**, **B.Tech.**, **M.Tech.**, **Ph.D.**, **Principal** for providing us right ambiance to carry out this project work.

We would like to thank **Dr.A.Kavitha**, **M.E.**, **Ph.D.**, **Professor and Head**, **Department of Electronics and Communication Engineering** for her unwavering moral support and constant encouragement towards the completion of this project work.

We offer our wholehearted thanks to our **Project Supervisor**, **Dr.E.Dinesh**, **B.E.**, **M.E.**, **Ph.D.**, **Associate Professor**, Department of Electronics and Communication Engineering for him precious guidance, tremendous supervision, kind cooperation, valuable suggestions, and support rendered in making our project to be successful.

We would like to thank our **Minor Project Co-ordinator**, **Mrs.D.Pushpalatha**, **M.E., Assistant Professor**, Department of Electronics and Communication Engineering for her kind cooperation and culminating in the successful completion of this project work. We are glad to thank all **the Faculty Members** of the **Department of Electronics and Communication Engineering** for extending a warm helping hand and valuable suggestions throughout the project. Words are boundless to thank our Parents and Friends for their motivation to complete this project successfully.

ABSTRACT

This project is designed to create a sustainable and effective approach for producing electricity from non-biodegradable waste materials, including plastics and various types of refuse, through the application advanced Waste to Energy (WTE) technologies. By utilizing thermal treatment methods such as pyrolysis, gasification, and incineration, the initiative aims to transform waste into valuable energy resources, thereby alleviating the environmental pressures associated with landfills and marine pollution. The emphasis is placed on enhancing the energy conversion process to achieve optimal output, thereby contributing to the generation of renewable energy. Ultimately, this project aspires to provide a viable, environmentally friendly solution for waste management, minimize ecological impact, and establish a scalable framework for communities around the globe.

TABLE OF CONTENTS

CHAPTER	CONTENTS	PAGE
No.		No.
	Institution Vision and Mission	iii
	Department Vision and Mission	iii
	Department PEOs, Pos and PSOs	iv
	Abstract	viii
	List of Figures	xi
	List of Abbreviations	xii
1	INTRODUCTION	1
	1.1 Objective	1
	1.2 Description	1
2	LITERATURE SURVEY	2
	2.1 Overview of Waste - to – Energy Technologies	2
	2.2 Pyrolysis for Waste Management	2
	2.3 Gasification for Renewable Energy Production	2
	2.4 Environmental Impact of WTE Technologies	3
	2.5 Economic Viability and Scalability	3
	2.6 Global Case Studies	3
	2.7 Challenges and Future Prospects	3
3	EXISTING SYSTEM	4
	3.1 Thermal Treatment Technologies	4
	3.2 Biological Treatment Methods	4
	3.3 Energy Recovery Efficiency	5
	3.4 Environmental Consideration	5
	3.5 Global Adoption	5

	3.6 Economic and Operational Challenges	5
4	PROPOSED SYSTEM	
	4.1 Advanced Thermal Treatment Technologies	6
	4.2 Automated Waste Segregation and Pre-	6
	Treatment	
	4.3 Energy Recovery and Utilization	6
	4.4 Emission Control Systems	7
	4.5 Integration with Renewable Energy Sources	7
	4.6 Scalable and Modular Design	7
	4.7 Economic Viability and Policy Alignment	7
	4.8 Community Engagement and Education	7
5	HARDWARE DESCRIPTION	8
	5.1 Block Diagram	8
	5.2 Components	9
6	RESULT AND DISCUSSION	12
7	CONCLUSION AND FUTURE WORKS	13
	REFERENCES	14

LIST OF FIGURES

FIGURE No.	TITLE	PAGE No.	
5.1.1	Block Diagram	8	
5.2.2	Microcontroller	10	
5.2.3	LED Bulb	10	
5.2.4	Storage Battery	11	
5.2.5	LCD Display	11	

LIST OF ABBREVIATIONS

ACRONYM		ABBREVIATION
WTE	-	Waste To Energy
MSW	-	Municipal Solid Waste
LCD	-	Liquid Crystal Display
LED	-	Light Emitting Diode
ADC	-	Analog to Digital Converter
CCPP	-	Combined-Cycle Power Plant
RDF	-	Refuse-Derived Fuel
GHG	-	Green House Gases
LHV	-	Lower Heating Value
СНР	-	Combined Heat and Power
SRF	-	Solid Recovered Fuel
PAH	-	Polycyclic Aromatic Hydrocarbons
EPA	-	Environmental Protection Agency
HHV	-	Higher Heating Value
CEM	-	Continuous Emission Monitoring

SDG

Sustainable Development Goals

INTRODUCTION

This project aims to tackle the pressing environmental issue of non-biodegradable waste accumulation by creating a sustainable and effective Waste—to-Energy (WTE) approach. As plastic and various other waste materials continue to contaminate landfills and oceans, the initiative seeks to transform this waste into a valuable energy source, thereby lessening its ecological impact. The primary goal is to improve the efficiency of these processes to maximize energy output, thereby contributing to the generation of renewable energy while reducing negative environmental effects.

1.1 OBJECTIVE

The primary objective of this project is to develop a sustainable and efficient approach to managing non-biodegradable waste by converting it into renewable energy using advanced Waste-to-Energy (WTE) technologies. This initiative aims to optimize thermal treatment methods such as pyrolysis, gasification, and incineration to maximize energy output while minimizing harmful emissions. By addressing the environmental challenges associated with landfills and marine pollution, the project seeks to contribute to environmental conservation and reduce the ecological impact of waste disposal.

1.2 DESCRIPTION

This project focuses on utilizing non-biodegradable waste materials, such as plastics and other refuse, to generate renewable energy through advanced Waste-to-Energy (WTE) technologies. By employing thermal treatment methods like pyrolysis, gasification, and incineration, the project aims to transform waste into valuable energy resources while minimizing harmful emissions.

LITERATURE SURVEY

2.1 Overview of Waste-to-Energy Technologies

Waste-to-Energy technologies have gained significant attention as a sustainable solution to address the dual challenges of waste management and energy generation. Studies highlight thermal treatment methods such as incineration, pyrolysis, and gasification as effective techniques to convert non-biodegradable waste into energy. Incineration involves combustion to produce heat energy, while pyrolysis and gasification operate in oxygen-limited environments to generate syngas, bio-oil, and other byproducts useful for energy production. Research emphasizes the need for advanced systems to enhance efficiency and reduce emissions.

2.2 Pyrolysis for Waste Management

Several studies (e.g., Patel et al., 2020) demonstrate the potential of pyrolysis to convert plastic waste into liquid fuels, syngas, and char. This method offers a cleaner alternative to landfilling and incineration, with reduced greenhouse gas emissions. The scalability of pyrolysis is discussed, along with the need for optimization in feedstock preparation and reactor designs.

2.3 Gasification for Renewable Energy Production

Research on gasification (Smith et al., 2019) highlights its versatility in processing various waste types, including plastic and municipal solidwaste(MSW). The process produces syngas, which can be used to generate electricity or as a raw material for chemical synthesis. Recent advancements in gasification technologies focus on improving syngas purity and reducing tar formation for higher efficiency.

2.4 Environmental Impact of WTE Technologies

Studies (Kim & Lee, 2021) compare the environmental impacts of different WTE methods. While incineration remains the most commonly used, it generates higher emissions compared to pyrolysis and gasification. Advances in pollution control systems, such as flue gas cleaning, are essential to mitigate these impacts. Research also highlights the role of WTE in reducing landfill use and its contribution to the circular economy.

2.5 Economic Viability and Scalability

Economic analyses (e.g., Gupta & Sharma, 2022) suggest that WTE projects can be cost-effective when combined with government policies and incentives. The literature underscores the importance of public-private partnerships, subsidies, and carbon credits in promoting WTE adoption. However, the initial capital costs and technological complexity remain significant barriers.

2.6 Global Case Studies

Successful implementations of WTE systems in countries such as Sweden, Japan, and Singapore serve as benchmarks for the adoption of these technologies. These nations have integrated WTE into their waste management frameworks, achieving high efficiency and environmental compliance. Lessons learned from these case studies emphasize the importance of policy support, community involvement, and technological innovation.

2.7 Challenges and Future Prospects

Key challenges identified include the high energy demand of WTE processes, technological limitations in handling mixed waste streams, and public perception regarding safety and emissions.

EXISTING SYSTEM

The current waste-to-energy (WTE) systems are designed to manage municipal solid waste (MSW) and non-biodegradable materials by converting them into usable energy. These systems rely on well-established thermal treatment methods and face various challenges and limitations:

3.1 Thermal Treatment Technologies

Incineration: The most widely used WTE method, incineration involves burning waste at high temperatures to produce heat energy. This energy is typically used to generate electricity or heat water for district heating systems. Modern incinerators are equipped with pollution control systems, but they still emit greenhouse gases and require careful management of ash byproducts.

Pyrolysis: This process heats waste materials in an oxygen-deprived environment, breaking them down into syngas, bio-oil, and char. Pyrolysis is more environmentally friendly than incineration, but its adoption is limited due to high costs and technical complexities.

Gasification: Gasification converts waste into syngas through partial oxidation. The syngas can be used to produce electricity or as a feedstock for industrial applications. Gasification offers higher efficiency and lower emissions than incineration but requires sophisticated feedstock management.

3.2 Biological Treatment Methods (Complementary)

Anaerobic Digestion*: Though not a primary focus for non-biodegradable waste, anaerobic digestion processes organic waste to generate biogas. This method is often integrated into WTE systems for comprehensive waste management.

3.3 Energy Recovery Efficiency

Current WTE systems have moderate energy recovery efficiencies, with incineration averaging 20–30% and advanced systems like gasification achieving up to 60%. However, inefficiencies arise due to mixed waste streams and the presence of non-combustible materials.

3.4 Environmental Considerations

Existing systems have made significant strides in pollution control, using technologies such as:

Flue Gas Cleaning: Reduces emissions of dioxins, furans, and particulate matter.

Ash Management: Fly ash and bottom ash from incineration are treated to extract

recyclable materials and minimize hazardous waste. Despite these efforts, emissions

and residual waste remain challenges.

3.5 Global Adoption

Developed Countries: Nations like Sweden, Japan, and Singapore have successfully implemented advanced WTE systems, integrating them with recycling and landfill diversion strategies.

Developing Countries: Limited infrastructure, high costs, and inadequate waste segregation hinder the adoption of WTE technologies in many regions.

3.6 Economic and Operational Challenges

High Initial Costs: Establishing WTE plants requires significant capital investment, particularly for advanced technologies like pyrolysis and gasification. **Feedstock Quality:** Mixed waste streams often include non-combustible or hazardous materials, reducing system efficiency and increasing operational complexity.

PROPOSED SYSTEM

4.1 Advanced Thermal Treatment Technologies

Enhanced Pyrolysis: Use of high-efficiency reactors with precise temperature control to convert plastic and non-biodegradable waste into syngas, bio-oil, and char with minimal emissions.

Improved Gasification: Integration of advanced gasifiers capable of processing mixed waste streams to produce cleaner syngas for electricity generation or industrial applications.

Hybrid Systems: Combining pyrolysis and gasification to maximize energy recovery while reducing waste-to-residue ratios.

4.2 Automated Waste Segregation and Pre-Treatment

Deployment of automated sorting systems using AI and machine learning to segregate non-biodegradable, recyclable, and organic waste more efficiently.

Pre-treatment processes such as shredding, drying, and homogenization to enhance feedstock quality and energy conversion rates.

4.3 Energy Recovery and Utilization

Optimization of energy conversion processes to achieve higher efficiency, aiming for energy recovery rates exceeding 70%. Use of waste heat recovery systems for district heating, steam generation, or industrial applications. Storage and utilization of syngas and bio-oil for continuous energy supply, even during peak demand.

4.4 Emission Control Systems

Advanced flue gas treatment technologies to ensure compliance with international environmental standards by significantly reducing emissions of pollutants like dioxins, furans, and particulate matter. Capture and utilization of carbon dioxide for industrial or agricultural use, contributing to a circular carbon economy.

4.5 Integration with Renewable Energy Sources

Hybridization with renewable energy systems like solar or wind to enhance sustainability and reduce dependency on fossil fuels.

4.6 Scalable and Modular Design

Development of modular WTE plants tailored to specific community sizes and waste generation levels, enabling scalability for rural and urban areas alike. Portable units for remote or underserved regions with limited waste management infrastructure.

4.7 Economic Viability and Policy Alignment

Emphasis on reducing operational costs through energy-efficient technologies and resource recovery (e.g., metals, glass, and reusable ash byproducts). Alignment with government incentives, carbon credits, and public-private partnerships to ensure financial sustainability.

4.8 Community Engagement and Education

Programs to educate communities about waste segregation and the benefits of WTE technologies. Collaboration with local stakeholders to ensure smooth implementation and acceptance of the system.

HARDWARE DESCRIPTION

5.1 BLOCK DIAGRAM

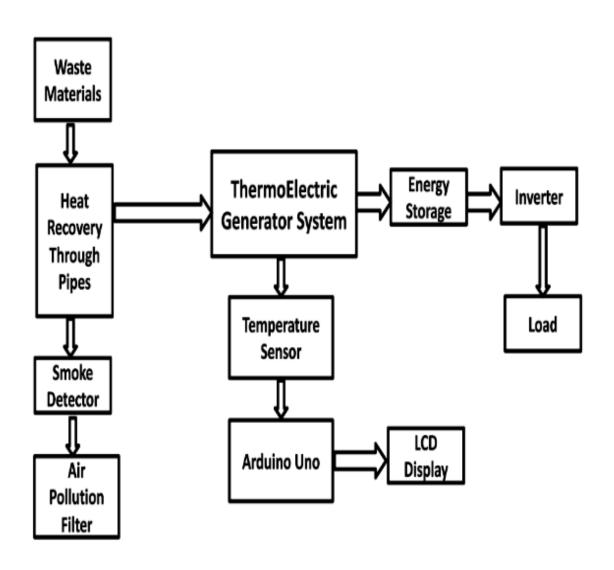


Fig 5.1.1

5.2 COMPONENTS

5.2.1 Solar Panel

The incorporation of solar panels into waste-to-energy generation systems effectively combines renewable energy with waste management, resulting in a sustainable and energy-efficient framework. Solar panels are essential for supplying supplementary power, which is necessary for the operation of conveyor systems utilized in waste sorting, as well as for air filtration and ventilation systems aimed at pollution control, and various control and monitoring devices. They enhance the off-grid capabilities of waste-to-energy facilities by providing energy during periods of inactivity or acting as backup power during grid outages, thus decreasing dependence on external energy sources.

5.2.2 Microcontroller

In a system designed to convert waste into electricity, the microcontroller serves as the essential processing unit, tasked with the responsibilities of monitoring, controlling, and presenting real-time information, such as the generated voltage, on an LCD display. It interfaces with critical components, including voltage sensors that assess the output voltage and LCDs that exhibit the processed information. The microcontroller utilizes its analogue to digital converter (ADC) or a voltage sensor module to read the voltage output from the generator. In instances where the voltage exceeds acceptable levels, scaling methods, such as a voltage divider, are employed to adjust it to a manageable range. Subsequently, the microcontroller translates the analogue voltage measurement into a digital format and processes this data to determine the actual voltage, taking into account the ADC resolution and scaling factors. This information is then transmitted to the LCD, which provides a real-time display of the voltage.



5.2.3 LED Bulb

In steam powered electricity generation systems using waste paper combustion, LED bulbs do not generate power but serve important supportive roles. They act as indicator light for monitoring combustion status, steam production, and safety systems, providing crucial visual feedback for operators. Their energy efficiency makes them ideal for general lighting, reducing overall energy consumption compared to traditional incandescent bulb.

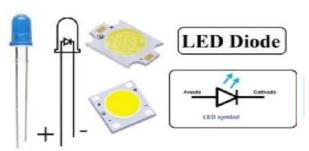


Fig 5.2.3

5.2.4 Storage Battery

Storage battery are typically used in waste paper combustion for steam powered electricity generation, which primarily focuses on converting waste paper into steam to drive a generator. However batteries can support related applications like providing uninterruptible power supply for control systems, storing excess energy for grid stability, and serving as backup power for auxiliary system. Batteries serve multiple functions in the electricity generation process from waste

materials. These devices are capable of chemically storing electrical energy and can discharge it as required to operate electrical equipment. A prevalent application of batteries in waste-to-energy facilities is to accumulate surplus energy produced by the plant during specific intervals.



Fig 5.2.4

5.2.5 LCD Display


An LCD display utilized in a waste paper combustion system that produces steam-powered electricity would present critical information necessary for process monitoring. This data would encompass the temperature within the combustion chamber, steam pressure, and the electricity generated by the system. For instance, it could exhibit readings such as "Combustion temperature: 1200 degree C" or "Power generation: 500kW."Furthermore, it would provide information on fuel levels, for example, "paper Waste Fuel:75% full," along with system status notifications like "System Operational" or "Error: Inspect Boiler Additionally, it would display emission levels to ensure compliance with environmental regulations such as "CO2 Emission:45 ppm.".



Fig 5.2.5

RESULT AND DISCUSSION

In this prototype, we initiate the heating of waste material within the combustion chamber, allowing the generated heat to be harnessed by specialized heating panels. The panels effectively convert heat energy into electrical energy, which is subsequently directed to a circuit board. This circuit board is constructed using IN4007 diodes, as well as capacitors configured in both series and parallel arrangements to enhance the energy output, which is then stored in a battery. A heating sensor continuously monitors the temperature, activating the circuit to power LED bulbs. These bulbs will emit light as long as the energy generation persists and while the sensor detects active energy production. The illumination from the bulbs will remain uninterrupted during both energy generation and battery charging phases. The stored energy produced through this process can be utilized for various applications. Currently, we observe that waste materials can be effectively collected and processes through this innovative prototype, facilitating energy generation for practical use.

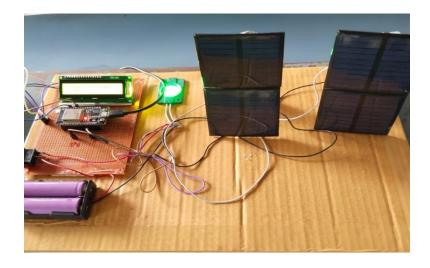

CONCLUSION AND FUTURE WORK

The incineration of waste paper as a means of generating electricity through steam presents a practical and environmentally sustainable solution for waste management and energy production. This process transforms waste paper into energy, thereby decreasing the volume of waste directed to landfills while simultaneously harnessing a renewable energy source that contributes to a reduction in dependence on fossil fuels. This process generates steam that powers turbines to produce electricity, while also lowering greenhouse gas emissions when executed with proper management. Furthermore, innovations in combustion technology and emissions regulation can significantly improve the environmental advantages of this method. In summary, incorporating waste paper combustion into energy production strategies supports broader objectives of sustainability and resource recovery, thus contributing to a more sustainable energy future. This initiative focuses on transforming non-biodegradable waste, including plastics, into electricity through thermal processes such as pyrolysis, gasification, and incineration. This method significantly diminishes the volume of waste directed landfills while generating a cleaner and renewable energy source. By tackling the escalating challenges of waste management, this strategy promotes a more sustainable energy production framework, thereby offering a valuable solution for environmental preservation and energy requirements. This waste-to-energy initiative offers a viable and environmentally sustainable approach to tackle two critical issues: waste management and energy requirements. By transforming nonbiodegradable waste into electricity via thermal methods, it alleviates the pressure on landfills and lessens the detrimental impact of plastic waste on the ecosystem.

REFERENCES

- [1] P.Ravibabu et al, 'An Approach of DSM Techniques for Domestic Load Management using Fuzzy Logic', at FUZZ-IEEE 2009, an International IEEE Conference on Fuzzy Syste ms, Jeju, Korea. PP 1303-1307.
- [2] Di Dio. V, Favuzza. S, La Cascia. D, Miceli. R, 'Economical Incentives and Systems of Certification for the production of Electrical Energy from Renewable Energy Resources', at ICCEP 07. International Conference on Clean Electrical Power, 2007, Capri. PP 277-282.
- [3] P.Ravibabu et al, 'DSM techniques and Fuzzy logic application to Air conditioner a case study', at WSEASPS'08, a WSEAS International conference on Power Systems, 2008. Santander, Spain, PP 292-298.
- [4] Woo, B.C. Lee, D.Y. Lee, H.W. Kim, I.j., 'Characteristic of maximum power with temperature difference for thermoelectric generator', at XX International Conference on _Thermoelectrics, 2001, Beijing, china. PP 431 434.
- [5] Alam . M .J, Iqbal.M.T, 'Design and development of hybrid vertical axis turbine', at CCECE'09, a Canadian Conference on Electrical and computer Engineering 2009, Canada . PP 431 434.
- [6] Ahsan . Q., Bhuiyan.M.R,'New approach for simulating an energy limited hydro unit', Generation, Transmission and Distribution, IEEE Proceedings, Volume: 137, Issue: 5, Sept. 1990, PP 359-363.
- [7] S.M.H Afaq Ahamad,"Handover Latency and Interoperability in future Generation Wireless Mobile Heterogenous Environment", Oriental Journal of Computer Science and Technology, vol. 12, no. 3,2020.

- [8] Hussain S.M., Yusof, K.M., Hussain, S.A., & Asuncion, R (2021). Performance evaluation of vertical handover in Internet of Vehicles. International Journal on Smart Sensing and Intelligent Systems, 14,1-16.
- [9] M. K. AL-Sakiti and S. M. Hussain, "Iot based monitoring and tracing of COVID-19 contact persons", J Stud Res, Jun. 2022.
- [10] waste to energy . SIEMENS ENERGY . (2022). Retrieved 26 May 2022 , from https://www.siemens-energy.com/global/en/offerings/power-generation/gas-engines/application/waste-to-energy.html.
- [11] A. Sz. Varadi, L.Strand, and J.Takacs, 'Clean Electrical Power Generation from Municipal Solid Waste', IEEE trans. Energy Conversion2009, pp 293-300.
- [12] A. Sz. Varadi and J.Takacs, 'Electricity Generation from Solid Waste by Pilot Projects' International Symposium on Power Electronics, Electrical Drives, Automation and Motion, 2008, pp 826-831.
- [13] BerntJohnke, 'Emissions From Waste Incineration', Good Practice Guidance and Uncertainty management in National Greenhouse Gas Inventories, 2009,pp 455-468.

OUTCOME

Plagiarism report

Dinesh Elangovan Waste Paper Combustion For Steam Powered Electricity MKCE ECE K Ramakrishnan College of Engineering **Document Details** Submission ID 6 Pages trn:oid:::1:3068922704 3,117 Words Submission Date Nov 6, 2024, 11:00 AM GMT+5:30 19,579 Characters Download Date Nov 6, 2024, 11:07 AM GMT+5:30 File Name IEEE_3.pdf File Size 267.4 KB turnitin Page 1 of 9 - Cover Page Submission ID trn:oid:::1:3068922704 Turnitin Page 2 of 9 - Integrity Overview Submission ID trn:oid:::1:3068922704 2% Overall Similarity The combined total of all matches, including overlapping sources, for each database. Filtered from the Report Bibliography Quoted Text **Match Groups Top Sources** 5 Not Cited or Quoted 2% Matches with neither in-text citation nor quotation marks 2% Publications

Applied for conference

