bdcp

BLACKTOWN DEVELOPMENT CONTROL PLAN 2015

Part N

Ashlar Precinct

Blacktown City Council

Table of Contents

1 Introduction 4
1.1 Structure of this Part 4
1.2 Land to which this Part applies 4
1.3 Relationship to Blacktown Development Control Plan 4
1.4 General objectives 5
2 Urban design 7
2.1 Concept master plan 7
2.2 Public open space 11
2.3 Access and linkages 13
2.4 Safety and surveillance 16
3 Built form 18
3.1 Architectural character 18
3.2 Privacy 19
3.3 Landscaping 19
3.4 Fencing 19
3.5 Detached dwellings 20
3.6 Dual occupancy 21
3.7 Semi-detached dwellings 22
3.8 Attached dwellings 23
3.9 Multi dwelling housing 24
3.10 Secondary dwellings 26
3.11 Residential flat buildings and shop top housing 26
3.12 Neighbourhood shops 27

Figures

Figure 1.1 Land to which this Part of the Blacktown DCP applies 6
Figure 2.1 Concept master plan 9
Figure 2.2 Key design elements 10
Figure 2.3 Open space 12
Figure 2.4 Street hierarchy 15
Figure 2.5 Typical street sections 16

Tables

Table 2.1 Street hierarchy principles....13
Table 2.2 Road design requirements....14
Table 3.1 Fencing....20
Table 3.2 Detached dwellings....21
Table 3.3 Dual occupancy....22
Table 3.4 Semi-detached dwellings....23
Table 3.5 Attached dwellings....24
Table 3.6 Multi dwelling housing....25
Table 3.7 Secondary dwellings....26
Table 3.8 Residential flat buildings and shop top housing....27

1 Introduction

This Part of the Blacktown Development Control Plan (DCP) 2015 has been prepared in accordance with the provisions of the *Environmental Planning and Assessment Act 1979*.

Part N has been developed to provide guidance to facilitate the urban redevelopment of the former Ashlar Golf Course (the Ashlar Site). This will be done within the context of giving guidance for:

(a) Achieving the aims of the *Blacktown Local Environmental Plan (LEP) 2015* and relevant SEPPs

(b) Supporting development that complies with zone objectives and provides a harmonious living environment

(c) Encouraging a range of residential accommodation types that meet the needs of the local community

(d) Delivering public domain improvements, including improved local road connectivity, public open space network, bicycle and pedestrian connections and stormwater and flood management.

1.1 Structure of this Part

The following sections of this Part of Blacktown DCP 2015 present the development objectives and corresponding development controls. Each section has its own set of objectives and development controls that will be used to assess the appropriate application of the controls.

Part N of the Blacktown DCP 2015 contains the following structure:

(a) Section 1 – Introduction
(b) Section 2 – Urban Design Development Controls
(c) Section 3 – Built Form Development Controls.

1.2 Land to which this Part applies

The Ashlar Site comprises 38.38ha of land. The topography is gently undulating and comprises modified watercourses and a number of artificial waterbodies.

Part N of the Blacktown DCP 2015 applies to the land shown hatched on Figure 1 – Land to which this Part of the Blacktown DCP Applies.

Blacktown City Council is the consent authority for development on the Ashlar Site. When a Development Application (DA) is lodged which relates to land to which this Part applies, Council will take the provisions of Blacktown DCP 2015 into consideration in determining the DA.

1.3 Relationship to Blacktown Development Control Plan

Where there is an inconsistency with the Part N and any other Part of the DCP, the provisions of the Part N prevail to the extent of the inconsistency. Where an element is not covered by Part N then other sections of Blacktown DCP 2015 may apply. Part N must be read in conjunction with the following:

(a) Blacktown Local Environmental Plan (LEP) 2015

(b) Relevant State Environmental Planning Policies

(c) Any planning agreement that has been entered into under section 93F of the *Environmental Planning and Assessment Act 1979*

(d) Blacktown Development Control Plan 2015.

1.4 General objectives

Part N of the DCP provides a basis for the redevelopment of the Ashlar Site by providing details in relation to the following matters:

(a) The broad strategic planning principles and development controls for development on the Ashlar Site

(b) The development controls to be applied in the assessment of DA

(c) The required information to be submitted with any DA and to ensure a clear process for applicants to follow.



Figure 1.1 **Land to which this Part of the Blacktown DCP applies**

2 Urban design

This section describes the principles to achieve the desired built form and public domain.

2.1 Concept master plan

The Ashlar Site must connect with the surrounding areas and integrate into the existing urban fabric, creating a new neighbourhood with a diversity of housing types connected to the open space system.

The existing concrete drainage channel must be deconstructed and transformed into a wetland corridor with a series of ponds, wetlands and parks with regional cycle paths. The Breakfast Creek corridor must be restored to a quality natural riparian system, promoting and celebrating the native flora and fauna associated with the ecosystem.

Significant and diverse open spaces must be delivered. The open space system should be designed to integrate with the hydrological systems and retained trees within the landscape. The open space system comprises an Entry Park, the Wetland Corridor, Central Park and Breakfast Creek Wetlands.

Community uses and facilities should be incorporated into the open space system at the Ashlar Site and should include infrastructure for recreation including cycle paths, play areas and BBQ equipment.

A dedicated pedestrian and cycle movement network must be developed to connect the wetlands and parklands via the western riparian corridor with the Blacktown Showground and regional open space system.

A range of housing types including detached dwellings, semi-detached, attached, multi-dwelling housing and residential flat buildings should be delivered at the Ashlar Site. Opportunities should also be provided for mixed use development and community facilities. All forms of development should provide interesting and diverse streetscapes.

- **Objectives**

  (a) Capitalise on the existing and natural features of the Ashlar Site, trees and hydrology, for place-making, site-responsive development and community amenity

  (b) Provide high quality public domain and infrastructure to cater for a range of users in the community

  (c) Encourage housing choice and diversity

  (d) Promote walking, cycling and public transport

  (e) Provide an overall density that is appropriate for an urban infill site within the Blacktown City Centre

  (f) Provide a range of housing types to accommodate diverse ages and incomes

  (g) Provide a range and mix of lot sizes to suit a variety of dwelling types

  (h) Ensure denser forms of residential development are located near open spaces and areas of highest amenity

(i) Encourage housing affordability through a range of different housing products

(j) Provide passive surveillance of public spaces through the effective and functional layout designs of new development

(k) Encourage the design of subdivisions to maximise solar access

(l) Ensure subdivision and road layout take account of existing trees to be retained.

- **Controls**

(a) Development must be designed in accordance with Figure 2 - Concept Master Plan and take into consideration the design elements outlined in Figure 3 – Key Design Elements

(b) The open space system should be easily accessible to all residents and the broader community, providing infrastructure and community facilities to serve a range of user groups

(c) Denser housing types, such as residential flat buildings and multi dwelling housing, shall generally be located adjacent to the railway line

(d) Stormwater from all allotments must be able to be drained satisfactorily to the Council stormwater system.



Figure 2.1 Concept master plan

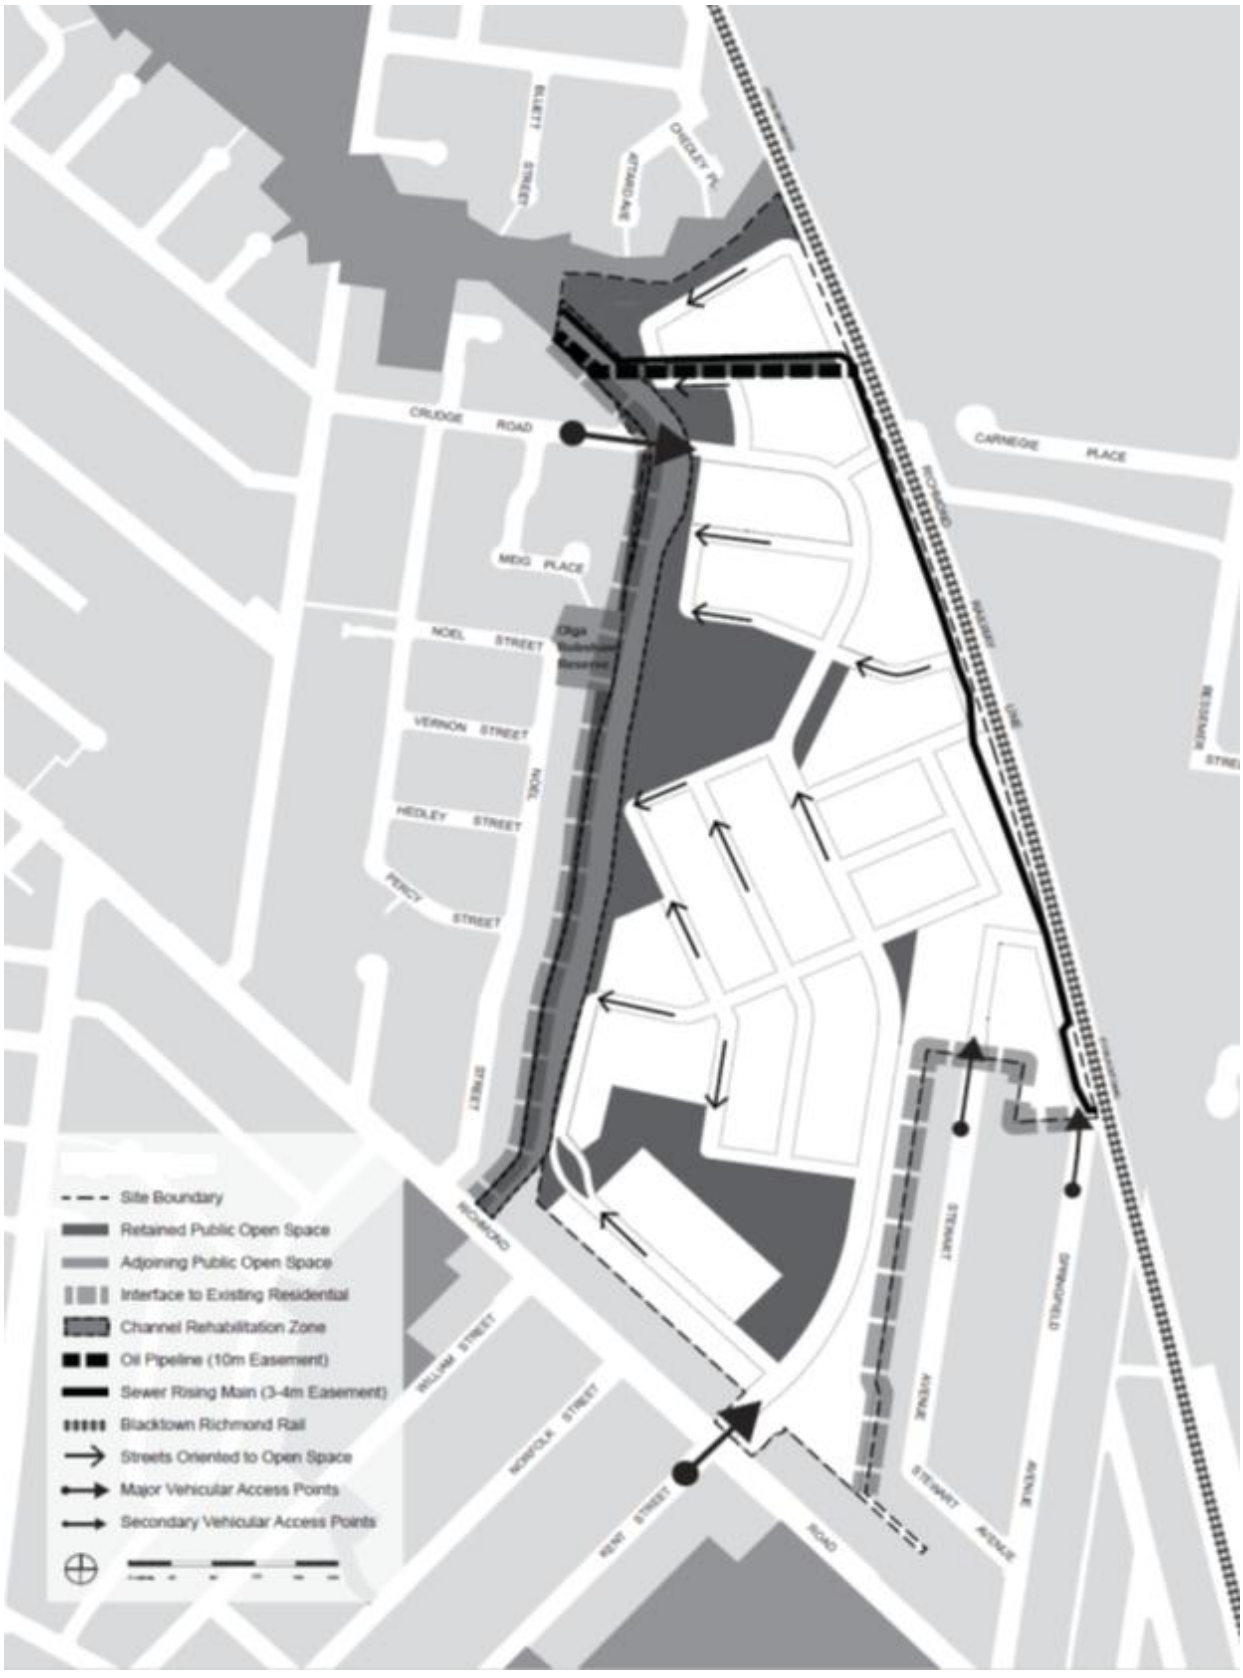


Figure 2.2 Key design elements

2.2 Public open space

- **Objectives**

  (a) Provide a range of parklands which respond to natural systems, retain trees and cater for a wide range of user needs

  (b) Provide physical and visual linkages between open spaces

  (c) Provide each open space with a strong character, sense of safety and usability

  (d) Establish attractive and safe walking and cycle links that provide opportunities for regional linkages

  (e) Enable casual surveillance of the public domain.

- **Controls**

  (a) Provide a range of open spaces which creates a continuous parkland network in accordance with Figure 4 – Open Space

  (b) The design of the open spaces should ensure maximum tree retention

  (c) The Wetland Corridor should be enhanced and embellished with boardwalks, viewing platforms and seating

  (d) The Wetland Corridor must be naturalistic in character and planting whilst providing dedicated pedestrian and cycle linkages to deliver a regional asset and local amenity in the form of a wetland/parkland system

  (e) Locational and interpretive signage and appropriate lighting shall be provided as part of the open space system and provide direction to regional linkages and destinations

  (f) All open spaces shall provide high quality, robust, low maintenance park furniture including benches, tables, and chairs to allow the functional use of the open space by the community

  (g) Children's playground facilities should be located at key locations throughout the open space and provide active playground facilities for the community.

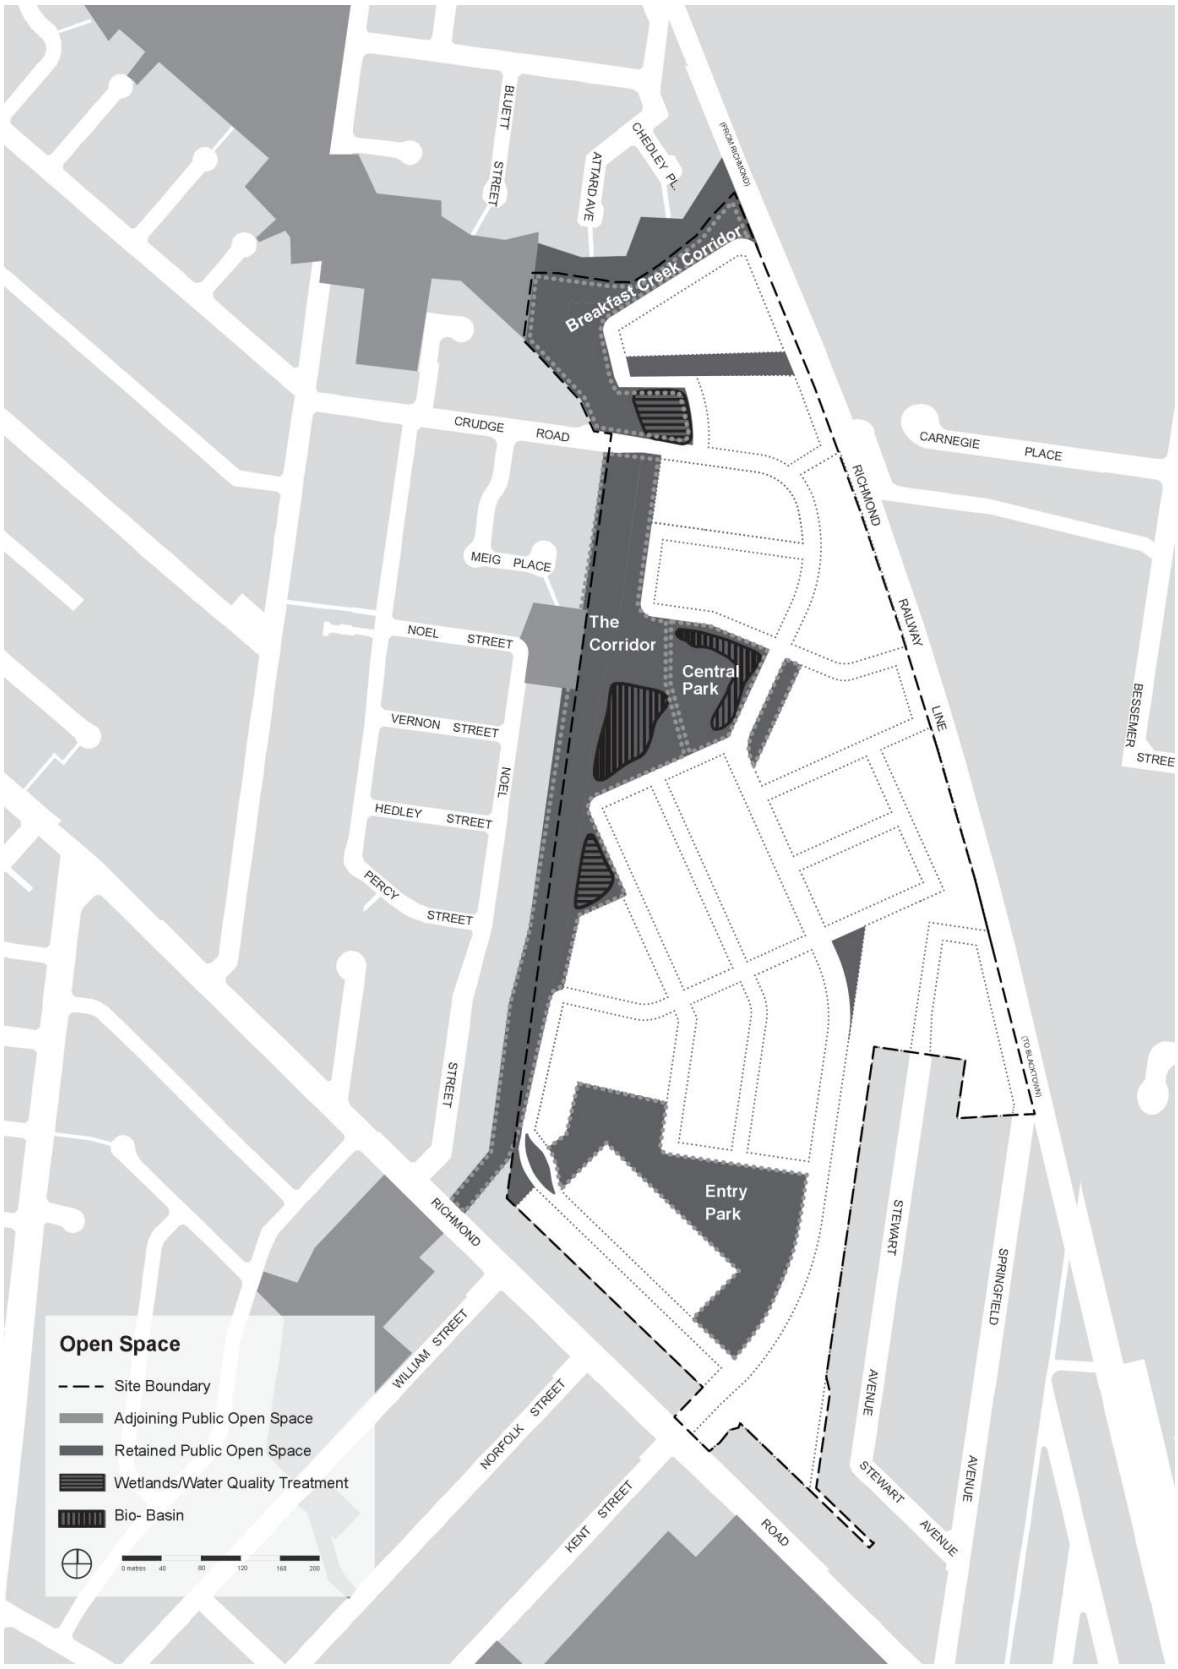


Figure 2.3 Open space

2.3 Access and linkages

The street design on the Ashlar Site should encourage walking and cycling through traffic management, visual interest through the enhanced landscape of the site, and by providing connections to surrounding community facilities within walking distance of the majority of residents.

The street network should be designed to comprise a hierarchy of streets that respond to two primary considerations:

(a) **Character**: the physical qualities of thoroughfares designed to support a variety of building types and pedestrian activity

(b) **Capacity**: the number of vehicles that can move safely along a thoroughfare within given periods. Traffic flows are accommodated by the number of vehicle lanes, lane width and kerb radii.

Street type	Streetscape character	criteria
Collector	An urban tree - lined avenue with closed canopy street tree planting providing shade for pedestrians and on - street car parking. The planting pattern transitions from park edge street to double planted verges to a centrally planted median as the neighbourhood character changes.	Formal avenue or median tree planting and groundcover with wider footpaths. Existing trees are retained within parks adjoining this street.
Local Street	Residential streets emanating from the Collector are planted in a formal manner with a variety of flowering tree species differentiating streets and residential precincts. Residential streets along the open space edge retain existing trees and provide additional planting whilst incorporating a hydrological function.	Formal avenue tree planting in verge. Existing tree retention in naturalistic clusters along open space edges and in widened verges. The Springfield and Stewart Avenue extension planted informally with naturalistic clustering of trees as an extension of the streetscape character of the adjoining development.
Private/ Community Title	Private community road style thoroughfares with buffer strips providing groundcover and feature tree planting terminating vistas and creating intimate secondary spaces.	Predominately hardscape with feature trees located in tree wells and groundcover adjoining garages.

Table 2.1 Street hierarchy principles

- **Objectives**

(a) To create a street hierarchy that reflects the function, character and carrying capacity of each street and forms part of the traffic circulation network

(b) To establish a street network that promotes a liveable and permeable local environment

(c) To provide safe and convenient all weather access to all lots.

- **Controls**

(a) The street hierarchy and configurations must be provided in accordance with **Figure 5 – Street hierarchy**, **Figure 6 – Typical street sections** and **Table 2 – Road design requirements**.

Street type	Carriageway width (m)	Total verge width (m)	Minimum road reserve (m)	Minimum street corner radius (m)	Number of lanes
Collector					
Loop roads serving activity centres such as large open space areas, shops, etc.	11m	3.5m	18m	5m x 5m splay corner with 7.5m kerb return radii	2 travel lanes/ 2 parking lanes
Local Street					
Minor loop roads serving more than 30 dwellings including corner lots	9m	3.5m	16m	5m x 5m splay corner with 7.5m kerb return radii	2 travel lanes/ 2 parking lanes
Private Access Ways	Urban design principles for private access ways: • Serve no greater than 15 dwellings • High quality landscape environment • Good passive surveillance based CPTED principles • Varying pavement widths and treatments • Ease of access for residential vehicle manoeuvring • Pedestrian safety				

Table 2.2 Road design requirements

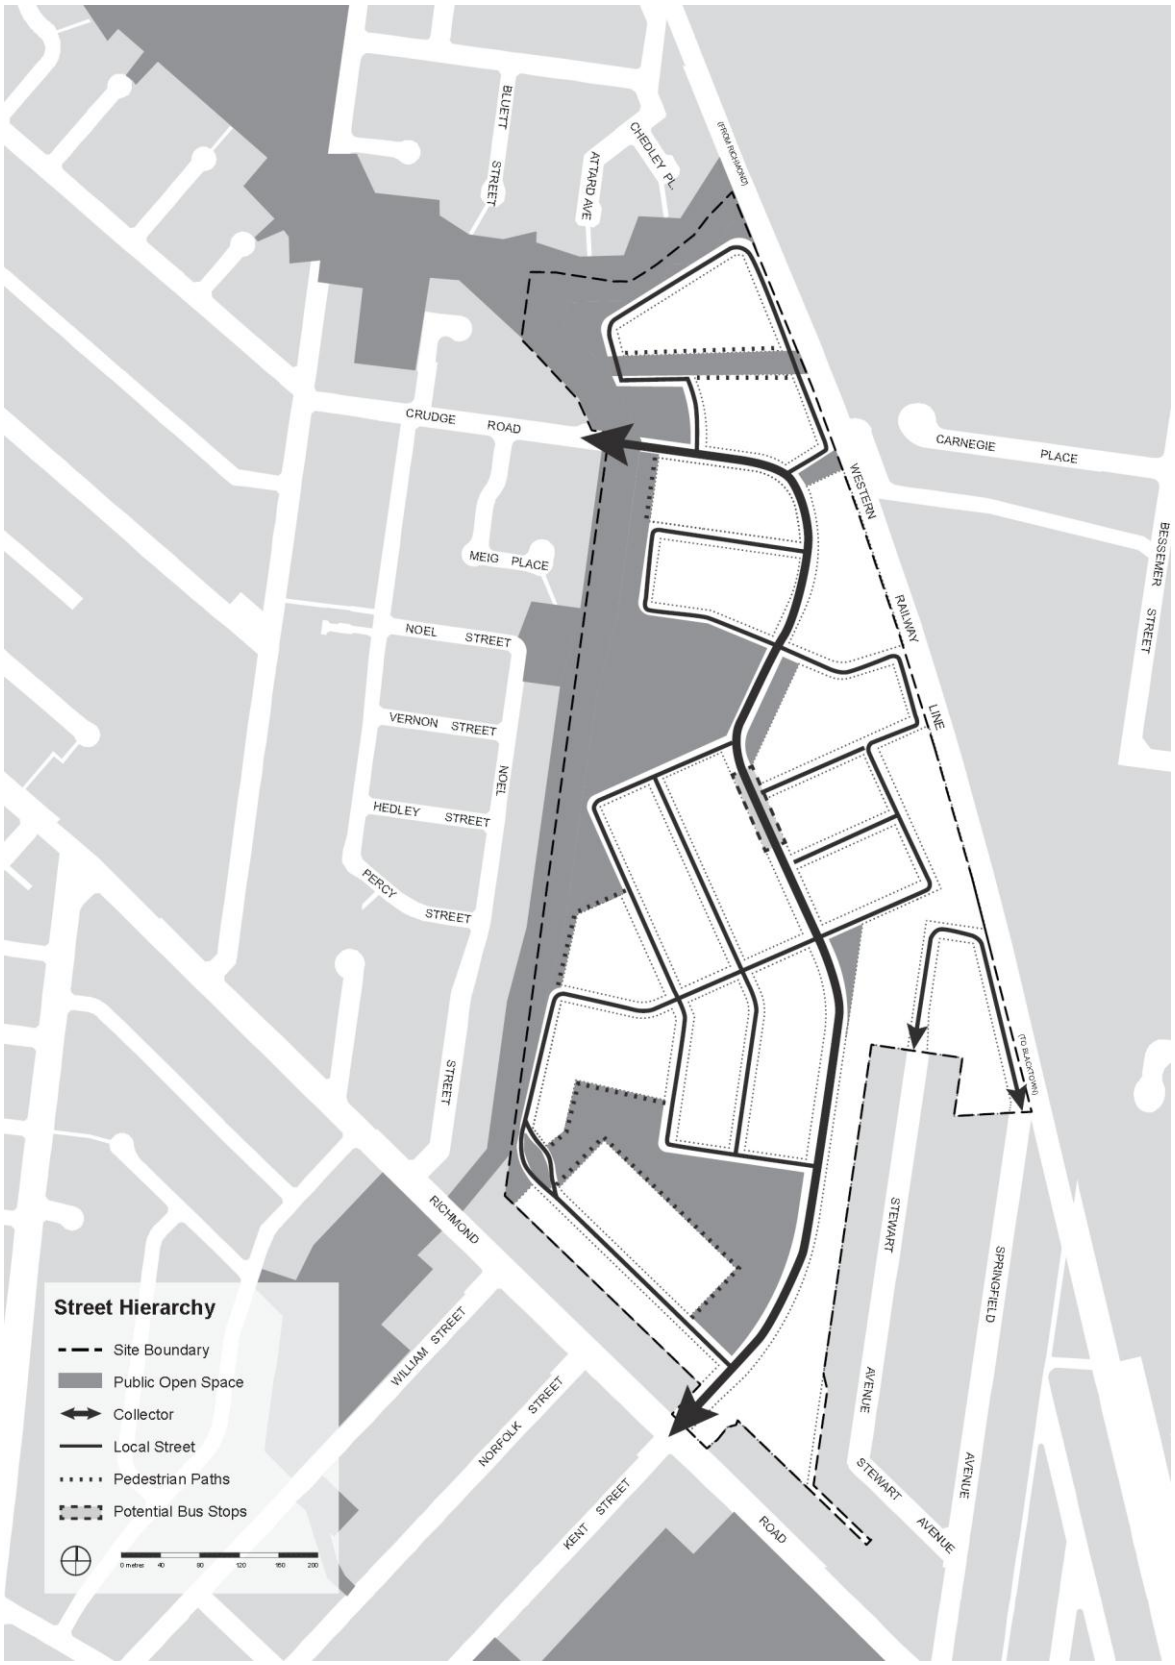


Figure 2.4 Street hierarchy

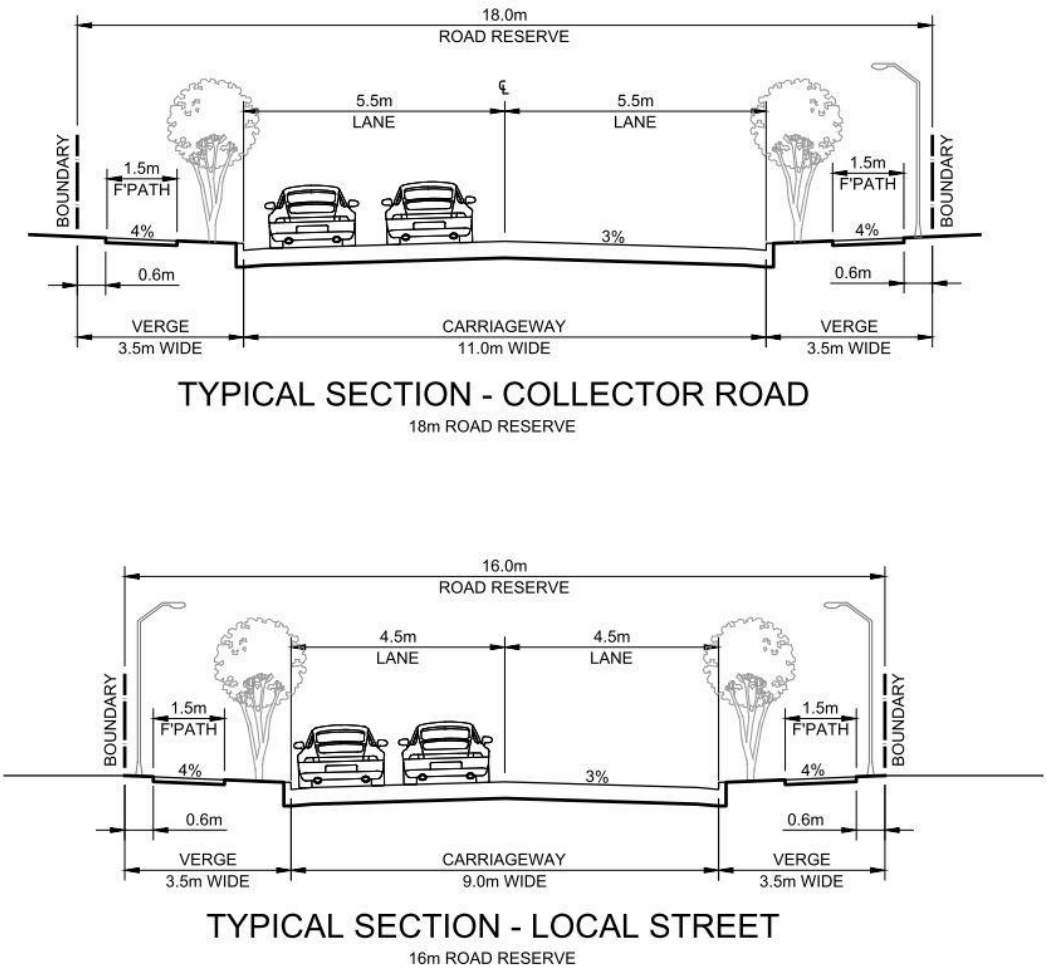


Figure 2.5 Typical street sections

2.4 Safety and surveillance

The public domain on the Ashlar Site should encourage a sense of community ownership through the appropriate design of publicly accessible areas.

- **Objectives**

  (a) Enhance safety, maximise surveillance and minimise opportunities for crime

  (b) Ensure that development encourages people to use streets, parks and other public places.

- **Controls**

  (a) All parklands, streets and buildings must be designed in accordance with CPTED principles

  (b) Park edge streets or pedestrian paths should be located adjacent to all parklands to maximise activity and visual surveillance

  (c) All parklands should be fronted by dwellings and/or streets to maximise natural surveillance

  (d) Appropriate lighting must be provided to all areas of the public domain

  (e) The main pedestrian access from streets to dwellings must be easily identified

  (f) Design features should be used to delineate areas of potential conflict between vehicles and pedestrians.

3 Built form

Section 3 sets out objectives and development controls for each of the permitted dwelling types.

3.1 Architectural character

- **Objectives**

  (a) Enhance the streetscape amenity and residential character

  (b) Ensure that individual buildings contribute positively to the public domain of streets and public open spaces

  (c) Create innovative and high standard architectural design

  (d) Consider proportions in the design of the building elevations and separation between buildings

  (e) Reinforce significant street intersections through articulation of corner buildings

  (f) Create interesting views and vistas that contribute to the streetscape.

- **Controls**

  (a) Building facades must be articulated with the building design and its massing by using:

  (i) Variations in setbacks
  (ii) A mix of building materials
  (iii) Balcony and other elements
  (iv) Shutters, awnings and louvres
  (v) Attention to proportion of openings, window type and size.

  (b) Corner buildings should use varying heights, massing and articulation to address primary and secondary street frontages

  (c) Windows to living area should be directed either to the street or rear private open space (and private driveway) to provide surveillance to the street and other open space areas

  (d) Where windows of bathrooms, ensuites and laundries face the street, care must be taken to maintain privacy and minimise their presence to the street, through the use of highlight windows, screening elements or translucent or opaque glazing

  (e) Communication devices, including satellite dishes and similar elements, should not to be visible from the street

  (f) Carports and garages should be constructed of materials that complement the colour and finishes of the main dwelling

  (g) No more than 40% of the total number of dwellings fronting a street can have garages with a width greater than 50% of the dwelling width

  (h) No more than 50% of the total number of dwellings fronting a street can have balconies with a width greater than 70% of the dwelling width.

3.2 Privacy

- **Objective**

  Ensure that buildings are designed to maximise privacy.

- **Development control**

  Upper storey living area windows or balconies that face directly to windows, balconies or private open spaces of adjoining properties must be offset or screened.

3.3 Landscaping

- **Objectives**

  (a) Maximise microclimate benefits to residential lots

  (b) Enhance streetscape amenity

  (c) Ensure planting success and continuity

  (d) Minimise requirements for irrigation and fertilisers.

- **Controls**

  (a) Indigenous species should make up a large percentage of the plant mix

  (b) Plants should be low maintenance and long lived

  (c) A landscape plan must be submitted with all housing DAs.

3.4 Fencing

- **Objectives**

  (a) Ensure front fences contribute to the streetscape and create a clear distinction between private and public domain

  (b) Ensure that rear and side fences will assist in providing privacy to open space areas

  (c) Ensure that fence height, location and design will not affect traffic and pedestrian visibility.

Development control		Requirements
Height	Primary Street Frontage	Maximum 1.6m for 20% of dwellings in a street, and a maximum of 0.9m for all other dwellings
	Secondary Street Frontage (Corner Lot)	Maximum 1.8m beyond 4.0m from the front boundary
	Side and Rear Boundary	1.8m behind the building setback
	Public Spaces	Maximum 1.2m
Materials	Primary Street Frontage and Public Spaces	Solid masonry construction permitted for 1.6m high fences, and solid construction for a maximum 0.6m with open style fencing thereafter for all other fences
	Front, Side and Rear Boundary	Metal sheeting not permitted
	Retaining Walls	Masonry when visible from public domain
	Courtyard Retaining Walls	Fencing to be positioned on top of wall

Table 3.1 Fencing

3.5 Detached dwellings

Development control			Minimum requirements
Lot	Minimum Lot Frontage		10m
Setbacks	Primary Street	Building Frontage	3.5m (reduced to 3.0m fronting Open Space)
		Garage Frontage (to door)	5.5m
		Articulation Zone	1.5m (minor architectural features, and balconies)
	Secondary Street (Corner Lot)	Building	2.0m for a maximum length of 12m, then 3m
		Articulation Zone	1.0m (minor architectural features and balconies)
	Side	Single Storey	1.0m
		Upper Storey	1.2m
	Rear	Lower Storey	1.0m (up to 50% of lot width, not including covered outdoor areas), then 4.0m
		Upper Storey	8.0m between rear of opposite dwellings
	Zero Lot Line (1 Side Only)	Single Storey	Maximum 75% of lot length
		Upper Storey	Maximum 50% of lot length
Open Space	Private Open Space (POS)		55sq.m (behind the front setback)
	Principle Private Open Space (PPOS)		24sq.m (directly accessible from living areas)
	Dimensions for PPOS		4.0m x 6.0m
	Width of Ground Level POS		2.5m

Development control			Minimum requirements
	Width of Upper Storey Living POS (Balcony)		2.0m
	Covered Outdoor Area (open on two sides)		100% of all covered outdoor areas included
Car Parking	3+ Bedroom Dwellings		2 spaces within the lot (1 space covered)
	1 – 2 Bedroom Dwellings		1 space within the lot
	Covered (internal dimensions)		Single – 5.5m x 3.0m
			Double – 5.5m x 5.5m
	Uncovered		2.5m x 5.2m
Site Coverage	Single Storey Dwelling		Maximum 70%
	Two Storey Dwellings		Maximum 60%
	Landscaped Area		15% of site area
Solar Access	On Lot and Adjoining Lots		2 hours sunlight between 9am and 3pm on 21 June

Table 3.2 Detached dwellings

3.6 Dual occupancy

Development control			Minimum requirements
Lot	Frontage		12.0m
Lot Size	Attached		400sq.m
	Detached		600sq.m
Setbacks	Primary Street	Building Frontage	3.5m (reduced to 3.0m fronting Open Space)
		Garage Frontage (to door)	5.5m
		Articulation Zone	1.5m (minor architectural features and balconies)
	Secondary Street (Corner Lot)	Building Frontage	2.0m for a maximum length of 12m, then 3m
		Articulation Zone	1.0m (minor architectural features and balconies)
	Side	Single Storey	1.0m
		Upper Storey	1.2m
	Rear	Lower Storey	1.0m (Up to 50% of Lot Width, not including covered outdoor areas), then 4.0m
		Upper Storey	8.0m between rear of opposite dwellings
	Attachment	Single Storey	Maximum 75% of lot length

Development control			Minimum requirements
	and/or Zero Lot Line (1 side only)	Upper Storey	Maximum of 50% of lot length
Open Space for each Dwelling	Private Open Space (POS)		40sq.m (behind the front setback)
	Principle Private Open Space (PPOS)		24sq.m (directly accessible from living areas)
	Dimensions of PPOS		4.0m x 6.0m
	Width of Ground Level POS		2.5m
	Width of Upper Storey Living POS (Balcony)		2.0m
	Covered Outdoor Area (open on two sides)		100% of all covered outdoor areas included
Car Parking	3+ Bedroom Dwelling		2 spaces within the lot (1 space covered)
	1-2 Bedroom Dwelling		1 space within the lot
	Covered (internal dimensions)		Single – 5.5m x 3.0m
			Double – 5.5m x 5.5m
	Uncovered		2.5m x 5.2m
Site Coverage	Site coverage		Maximum 60%
	Landscaped Area		15% of site area
Solar Access	On Lot and Adjoining Lots		2 hours sunlight between 9am and 3pm on 21 June

Table 3.3 Dual occupancy

3.7 Semi-detached dwellings

Development control			Minimum requirements
Lot	Frontage		8.0m
Setbacks	Primary Street	Building Frontage	3.5m (reduced to 3.0m fronting Open Space)
		Garage Frontage (to door)	5.5m
		Articulation Zone	1.5m (minor architectural features & balconies)
	Secondary Street (Corner Lot)	Building Frontage	2.0m for a maximum length of 12m, then 3m
		Articulation Zone	1.0m (minor architectural features & balconies)
	Side	Single Storey	1.0m
		Upper Storey	1.2m
	Rear	Lower Storey	1.0m (Up to 50% of Lot Width, not including covered outdoor areas), then 4.0m

Development control			Minimum requirements
		Upper Storey	8.0m between rear of opposite dwellings
	Attachment and/or Zero Lot Line (1 side only)	Single Storey	Maximum 75% of lot length
		Upper Storey	Maximum 50% of length
Open Space	Private Open Space (POS)		40sq.m (behind the front setback)
	Principle Private Open Space (PPOS)		24sq.m (directly accessible from living areas)
	Dimensions for PPOS		4.0m x 6.0m
	Width of Ground Level POS		2.5m
	Width of Upper Storey Living POS (Balcony)		2.0m
	Covered Outdoor Area (open on two sides)		100% of all covered outdoor areas included
Car Parking	3+ Bedroom Dwelling		2 spaces within the lot (1 space covered)
	1-2 Bedroom Dwelling		1 space within the lot
	Covered (internal dimensions)		Single – 5.5m x 3.0m
			Double – 5.5m x 5.5m
	Uncovered		2.5m x 5.2m
Site Coverage	Single Storey Dwelling		Maximum 70%
	Two Storey Dwelling		Maximum 60%
	Landscaped Area		15% of site area
Solar Access	On Lot and Adjoining Lots		2 hours sunlight between 9am and 3pm on 21 June

Table 3.4 Semi-detached dwellings

3.8 Attached dwellings

Development control			Minimum requirements
Lot	Frontage		5.0m
Setbacks	Primary Street	Building Frontage	3.5m (reduced to 3.0m fronting Open Space)
		Garage Frontage (to door)	5.5m
		Articulation Zone	1.5m (minor architectural features & balconies)
	Secondary Street (Corner Lot)	Building Frontage	2.0m for a maximum length of 12m, then 3m
		Articulation Zone	1.0m (minor architectural features & balconies)
	Side	Single Storey	1.0m

Development control			Minimum requirements
		Upper Storey	1.2m
	Rear	Lower Storey	1.0m (Up to 50% of lot width, not including covered outdoor areas), then 4.0m
		Upper Storey	8.0m between rear of opposite dwellings
	Attachment and/or Zero Lot Line	Single Storey	Maximum 75% of lot length
		Upper Storey	Maximum 50% of lot length
Open Space	Private Open Space (POS) for 3+ Bedrooms		40sq.m (behind the front setback)
	POS for 1-2 Bedrooms		24sq.m
	Principle Private Open Space (PPOS)		24sq.m (directly accessible from living areas)
	Dimensions for PPOS		4.0m x 6.0m
	Width of Ground Level POS		2.5m
	Width of Upper Storey Living POS (Balcony)		2.0m
	Covered Outdoor Area (open on two sides)		100% of all covered outdoor areas included
Car Parking	3+ Bedroom Dwelling		2 spaces within the lot (1 space covered)
	1-2 Bedroom Dwelling		1 space within the lot
	Covered (internal dimensions)		Single – 5.5m x 3.0m
			Double – 5.5m x 5.5m
	Uncovered		2.5m x 5.2m
Groups of Dwellings	Number of Attached Dwellings		Maximum 4
Site Coverage	Site Coverage		Maximum 70%
	Landscaped Area		15% of site area
Solar Access	On Lot and Adjoining Lots		2 hours sunlight between 9am and 3pm on 21 June

Table 3.5 Attached dwellings

3.9 Multi dwelling housing

Development control			Minimum requirements
Setbacks	Primary Public Street	Building Frontage	3.5m (reduced to 3.0m fronting Open Space)
		Garage Frontage (to door)	5.5m
		Articulation Zone	1.5m (minor architectural features & balconies)
	Secondary Public Street	Building Frontage	2.0m for a maximum length of 12m, then 3m

Development control			Minimum requirements
	(Corner Lot)	Articulation Zone	1.0m (minor architectural features & balconies)
	Side	Single Storey	1.0m
		Upper Storey	1.2m
	Rear	Lower Storey	1.0m (Up to 50% of lot width, not including covered outdoor areas), then 4.0m
		Upper Storey	8.0m between rear of opposite dwellings
	Attachment and/or Zero Lot Line	Single Storey	Maximum 75% of lot length
		Upper Storey	Maximum of 50% of lot
Open Space	Private Open Space (POS) for 3+ Bedrooms		40sq.m (behind the front setback)
	POS for 1-2 Bedrooms		24sq.m
	Principle Private Open Space (PPOS)		24sq.m (directly accessible from living areas)
	Dimensions for PPOS		4.0m x 6.0m
	Width of Ground Level POS		2.5m
	Width of Upper Storey Living POS (Balcony)		2.0m
	Covered Outdoor Area (open on two sides)		100% of all covered outdoor areas included
Car Parking	3+ Bedroom Dwelling		2 spaces within the lot (1 space covered)
	1-2 Bedroom Dwelling		1 space within the lot
	Visitor Parking		1 off-street space per 2.5 dwellings, excluding dwellings with: • visitor parking within the lot • rear access
	Covered (internal dimensions)		Single – 5.5m x 3.0m
			Double – 5.5m x 5.5m
	Uncovered		2.5m x 5.2m
Groups of Dwellings	Number of Attached Dwellings		Maximum 4
Site Coverage	Site Coverage		Maximum 70%
	Landscaped Area		15% of site area
Solar Access	On Lot and Adjoining Lots		2 hours sunlight between 9am and 3pm on 21 June

Table 3.6 Multi dwelling housing

3.10 Secondary dwellings

Development control			Minimum requirements
Setbacks	Primary Public Street	Building Frontage	5.5m
	Secondary Public Street (Corner Lot)	Building Frontage	2.0m
		Articulation Zone	1.0m (minor architectural features)
	Side	Single Storey	1.0m
		Upper Storey	1.2m
	Rear	Single Storey	1.0m (Up to 50% of Lot Width, not including covered outdoor areas), then 4.0m
		Upper Storey	8.0m between rear of opposite dwelling
Open Space	Private Open Space (POS)		15sq.m per dwelling
	Width of Ground Level POS		2.5m
	Width of Upper Storey POS (Balcony)		2.0m
Car Parking	1-2 Bedroom Dwelling		1 space
	3+ Bedroom Dwelling		2 spaces
Site Coverage	Site Coverage		Maximum 60-%
	Landscaped Area		15% of site area
Solar Access	On Lot and Adjoining Lots		2hours sunlight between 9am and 3pm on June 21

Table 3.7 Secondary dwellings

3.11 Residential flat buildings and shop top housing

All residential flat buildings must be consistent with:

(a) the guidelines and principles outlined in SEPP No. 65 – Residential Flat Development

(b) the controls outlined in the table below.

Development control			Minimum requirements	
			SHOP TOP HOUSING	RESIDENTIAL FLAT BUILDINGS
Size	Lot Area		-	1000sq.m
	Frontage and Depth		-	30.0m
Setbacks	Primary Street	Building Frontage	-	6.0m
	Secondary Street (Corner Lot)	Building Frontage	-	6.0m
	Side and Rear	Ground Level and	-	6.0m

Development control			Minimum requirements	
			SHOP TOP HOUSING	RESIDENTIAL FLAT BUILDINGS
		Upper Storey		
Site Coverage	Site coverage		-	Maximum 50%
	Landscaped area		-	30% of site area (50% must be deep soil planting)
Building Separation	Gap between buildings		-	12.0m
Open Space	Private Open Space (POS)		10sq.m per dwelling	
	Width of POS		2.5m	
	Communal Open Space Area		15% of site area	
Car Parking	1-2 Bedroom Dwelling		1 space	
	3+ Bedroom Dwelling		2 spaces	
	Visitor spaces		1 space per 5 dwellings	
	Bicycle Parking Spaces		1 space per 2 dwellings	
	Visitor Bicycle Parking Spaces		1 space per 12 dwellings	

Table 3.8 Residential flat buildings and shop top housing

3.12 Neighbourhood shops

- **Objectives**

  (a) To provide for the appropriate siting and design of neighbourhood shops

  (b) To minimise the potential amenity impacts of neighbourhood shops on surrounding residential dwellings

  (c) To provide suitable car parking and access arrangements that meet the needs of tenants, while encouraging the use of non-car based transport by visitors.

- **Controls**

  (a) Neighbourhood shops must be designed to complement the bulk, scale and character of the surrounding residential dwellings.

  (b) Shop fronts must be designed to achieve an active streetscape.

  (c) Shop windows must allow for surveillance of the public domain.

  (d) Neighbourhood shops must only be developed on an allotment of land with a minimum frontage width of 10m.

  (e) Entrances to neighbourhood shops must be visible from the street and well lit.

  (f) Car parking must be provided at a rate of 1 space per 30sq.m of gross floor area.

  (g) Car parking spaces must be provided off-street and be readily identifiable and accessible from a public road.