VEHICULAR CROSSING AND ANCILLARY WORKS PROCESS AND CONSTRUCTION SPECIFICATIONS

Date of adoption: 10 December 2014

Effective date: 10 December 2014

City of Canada Bay

Document Set ID: 4375676
Version: 17, Version Date: 10/09/2025

Contents

Technical Specification 4
1. Objective 4
2. Application of this Specification 4
3. Number of Vehicular Crossings Permitted 4
4. Location 5
5. Levels & Gradients 5
6. Vehicular Crossing Widths 6
7. Existing Crossings 6
8. Other Applications 6
Development Applications (DA's) 6
Construction Certificates (CC's) & Complying Development Certificates (CDC's) 6
Section 96 Applications 6
Security Deposit 7
9. Vehicular Crossing &/or Ancillary Works Application Process 7
10. Preliminary Vehicular Crossing & Ancillary Works Application 7
11. Persons who can construct the Vehicular Crossing 8
12. Supervision 8
13. Alteration to Utility Services 9
14. Provision for Traffic 9
15. Proposed Road Design Affecting Vehicular Crossing Levels 10
16. Public Safety 10
17. Compliance with other Acts 10
18. Hours of Construction/Demolition 10
19. Preparation & Excavation 10
20. Minimum Slab Thickness 11
21. Material 11
22. Expansion & Construction Joints 11
23. Finish 11
24. Ancillary Works 12
25. Final Approval 12
26. Compliance 12
Compliance with this Specification 12
Illegal/Unauthorised Works 12

Document Set ID: 4375676
Version: 17, Version Date: 10/09/2025

27. Diagrams.....13
28.1 Longitudinal profile of Vehicular Crossing for Normal to High gradient – example 13
28.2 Longitudinal profile of Vehicular Crossing for Normal to Low gradient - example.....14
28.3 Diagram – Plan of typical Vehicular Crossing 15

Document Set ID: 4375676
Version: 17, Version Date: 10/09/2025

Technical Specification

1. Objective

To ensure uniformity in the design and construction of vehicle crossings and ancillary works in the City of Canada Bay local government area so that safe and convenient vehicular access to and from parking spaces on the property can be provided.

2. Application of this Specification

This Specification applies to all residential, commercial, and industrial developments either as part of a Development Application (DA) or not, where a formal crossing(s) or cross-over (layback) is proposed.

Vehicular Crossing crossings applicable to in this Specification, refers to the formal vehicular platform between the kerb line and the property boundary. It does not include access roads, vehicular access within the property boundary, suspended structures and the like, which will be assessed separately on its merits and may require DA approval.

Ancillary works refers to any works other than Vehicular Crossings and laybacks such as footpath construction or reconstruction, pavements, stormwater drainage pits and the like within the road reserve.

A potential applicant is **strongly advised** to familiarise themselves with:

1. **Section 10, Vehicular Crossing &/or Ancillary Works Application Process;** and
2. **Section 11, Preliminary Vehicular Crossing & Ancillary Works Application**.

Whilst all requirements outlined in this specification must be complied with, these two sections are critical, and will provide a preliminary indication as to whether a Vehicular Crossing application will be approved. These two sections will also ensure that if all necessary steps are followed, delays will be minimised due to incomplete information or circumstances that cannot satisfy the requirements detailed in this Specification.

3. Number of Vehicular Crossings Permitted

Residential developments are permitted a maximum of one (1) vehicle crossing for vehicle access. A maximum of two (2) crossings may be permitted under the following circumstances:

- The property is a corner block or has the front and rear backing onto a street, where it enjoys access to two (2) or more street frontages;
- The property is a commercial/industrial development where there are currently separate entry and exit points or there are two (2) or more entry levels or multiple ramps;
- Duplexes may be permitted to have two (2) vehicle crossings where the location of the garages or parking spaces within the property does not permit the use of a shared Vehicular Crossing;

Where access is off the same frontage, a minimum gap of 1.0 metre must be provided between Vehicular Crossings to prevent the Vehicular Crossing across the footway to be used as one.

Duplexes and other similar type of development may be permitted to have a single combined Vehicular Crossing. However, the maximum width may be assessed as if the site was for a single dwelling, or to a width which would be sufficient to permit only one vehicular movement to enter and exit the site in a forward direction.

Vehicle crossings are to be constructed perpendicular to the kerb line. In special circumstances, to reduce disturbance to traffic flow along a major road, an angled Vehicular Crossing may be permissible subject to the approval of Council's Engineer.

Document Set ID: 4375676
Version: 17, Version Date: 10/09/2025

4. Location

Vehicle access will not be permitted in the following circumstances:

- To a major road if reasonable access can be gained from another public road of lower classification;
- Opposite or within 6.0 metres of a median opening in a major road;
- Within 25.0 metres of a signalised intersection*;
- Within 9.0 metres at non-signalised intersections*;

The above distances are measured perpendicular from the face of the kerb of the intersecting street (prolongation of the kerb line or tangent point if curved).

***Note:** Access may be permitted provided that it is safe to do so and that it can be demonstrated to Council's satisfaction that extenuating circumstances exist, for example, where this is the only point where access can be gained.
A Vehicular Crossing will not be permitted if the proposed parking space within the property between the boundary and building line is less than 5.5m in length, causing a parked vehicle to encroach onto the footway reserve.

Vehicle access shall be located so that minimum sight distances to traffic and pedestrians can be provided. Sight distance to pedestrians shall be met by providing clear sight lines in accordance with AS/NZS 2890.1 -2004, Parking Facilities, Part 1: Off-street car parking. Vehicle crossings should also not be located where existing trees or power poles may obstruct sight lines or where it is too close to the root zone of trees. Similarly, the Vehicular Crossings shall not be located too close to power poles where undermining may occur.

Access shall be located so that sight distances are not affected by existing structures such as street trees, earth mounds, bus shelters, and other physical features. Council may not approve the location of such an access if the location will adversely affect sight lines or detracts from the streetscape of the area.

In some circumstances, Council may grant approval for the removal or relocation of these structures, where there is no alternative location. In such a situation, approval must be sought from Council's relevant officers who may include Council's Traffic Engineer, Tree Coordinator and Planners. All costs associated with such work shall be borne by the Owner.

All Vehicular Crossing accesses must be clear of existing stormwater inlet pits. The removal or reduction in the length of the pit lintel or grating is not acceptable, as this would reduce the capacity for stormwater collection. However, excluding existing pits located in a depression (sag), if the hydraulic characteristics of the drainage system are not made less efficient, the relocation of the pit may be permitted. In this circumstance, Council will undertake the works of pit relocation or nominate an approved Contractor. All costs associated with the relocation of the pit shall be borne by the Owner.

Vehicular Crossings must not be located over or near trees to be retained. The minimum clearance to trees will depend on factors such as the proximity to the trees root zone and sight lines.

5. Levels & Gradients

Generally, the absolute maximum longitudinal gradients shall not exceed 25% within the property and 10% in the footway. However if a pedestrian footpath is required, the gradient must not exceed 2.5% (1 in 40) across the footpath.

Changes in gradients shall not exceed 12.5% algebraically (1 in 8) to prevent vehicles scraping or bottoming. Changes in grades in excess of 12.5% will require the introduction of transitions. A transition of 2.0 metres in length will usually be sufficient. Its gradient can be calculated as the algebraic sum of the two adjacent grades.

Compliance shall be met with AS/NZS 2890.1 -2004, Parking Facilities, Part 1: Off-street car parking for general off street parking including maximum gradients of ramps and parking areas.

It is recommended that you engage a suitably qualified person to ensure that proposed design meets Council’s criteria.

Document Set ID: 4375676
Version: 17, Version Date: 10/09/2025

6. Vehicular Crossing Widths

The width of any crossing to a property must be kept to a minimum. Excessively wide vehicle crossings will:

- Compromise pedestrian safety by encouraging vehicles to cross the footway at greater speeds
- Minimise the area for pedestrian refuge
- Detracts from the streetscape by increasing the amount of visible hard paving
- Reduces on-street parking
- Wider Vehicular Crossings on narrow streets can be considered subject to a swept path assessment
- The maximum crossing slab width shall be as per DCP. However, Council does not encourage the construction of wide crossovers where it is unnecessary as it increases the risk to pedestrians and diminishes the opportunity for on-street parking. In special circumstances, where the road widths are narrow, the extra Vehicular Crossing widths may be permitted to prevent vehicles from driving onto the nature-strip or where safer access and egress could be shown.

Please refer to Council's DCP, page B-12:
https://canadabay.t1cloud.com/T1Default/CiAnywhere/Web/CANADABAY/API/CMIS/PUB/content/?id=folder-7719476&streamId=streampdf-7719476

7. Existing Crossings

Existing crossing slabs and laybacks may be re-utilised if;

- They are in the correct location, set at the correct levels and in reasonable condition, and;
- Its retention is NOT contrary to this Specification.

Otherwise, the crossing and layback must be removed. Where the crossing slab and layback is made redundant, it shall be completely removed and the footway area restored to Council's satisfaction.

Any existing un-used crossing(s) and/or layback(s) must be removed and the kerb and footpath reinstated/restored at the owners expense to the satisfaction of Council's Engineer.

8. Other Applications

Development Applications (DA's)

Where the Vehicular Crossing forms part of a Development Application (DA), the issuing of a Development Consent does not automatically guarantee approval of the proposed Vehicular Crossing &/or Ancillary Works in the road reserve. Development Approval constitutes approval within the property boundary ONLY. Approval or refusal of works in the road reserve can only be confirmed when a formal Vehicular Crossing Application is lodged with Council and a written response is issued by Council's City Services & Assets, Civil Infrastructure Operations department.

Construction Certificates (CC's) & Complying Development Certificates (CDC's)

Where the Vehicular Crossing forms part of a Complying Development , the issuing of a Complying Development Certificate does not automatically guarantee approval of the proposed Vehicular Crossing &/or Ancillary Works in the road reserve. The applicant is still required to have received all relevant Council approvals. Approval or refusal of works on Council land in relation to a Vehicular Crossing can only be confirmed when a formal Vehicular Crossing Application is lodged with Council and a written response is issued by Council's City Services & Assets, Civil Infrastructure Operations department.

Section 96 Applications

Where the Vehicular Crossing forms part of a Section 96 application, the issuing of Section 96 approval does not automatically guarantee approval of the proposed Vehicular Crossing &/or Ancillary Works in the road reserve. Section 96 approval constitutes approval within the property boundary ONLY. Approval or refusal of works in the road reserve

Document Set ID: 4375676
Version: 17, Version Date: 10/09/2025

can only be confirmed when a formal Vehicular Crossing Application is lodged with Council and a written response is issued by Council's City Services & Assets, Infrastructure Operations department.

If you have already received formal approval for a Vehicular Crossing, and subsequently lodge and receive approval under Section 96 for modification works to your development, it is the applicant's responsibility to notify Council's City Services & Assets, Civil Infrastructure Operations department immediately to ensure the validity of the Vehicular Crossing approval. This is due to the fact that the approved Vehicular Crossing between the property boundary and road reserve may no longer meet Council's Specifications complies with the AS/NZS 2890:1:2004 "Off street parking" code as a result of modifications.

In this circumstance, the applicant may be required to supply additional information that will assist Council's City Services & Assets, Civil Infrastructure Operations department in issuing a new approval. The applicant must receive written approval from Council's City Services & Assets, Infrastructure Operations department before progressing with the Vehicular Crossing.

Security Deposit

Council also reserves the right to use the security deposit to carry out rectification works resulting from incomplete &/or non-compliant works.
In addition, for Council to be satisfied that informed works have been undertaken to the relevant standards, and that there would be no underlying future rectifications arising from the construction works, Council also reserves the right to hold the applicant's bond for a period of twelve (12) months from the date of notification to the applicant. If this is Council's intent, the applicant will be notified in writing.

9. Vehicular Crossing &/or Ancillary Works Application Process

Council adopts a two-part approval process that the applicant must adhere to in order to seek Vehicular Crossing & Ancillary Works consent:

1. **Seek approval for the location of the proposed Vehicular Crossing &/or Ancillary Works.**
   Once you have determined the Vehicular Crossing location &/or design in accordance with Council's Vehicular Crossing & Ancillary Works Construction specification you are required to submit a **Preliminary Vehicular Crossing & Ancillary Works application.** The purpose of this application is for Council to assess the suitability of the proposed location for Vehicular Crossing &/or Ancillary works. ***This application does not allow the applicant to apply to construct works.***

2. **Seek approval for a Private Contractor to carry out works**
   Once Preliminary Vehicular Crossing & Ancillary Works approval has been received by the applicant in writing, proceed to submit a Vehicular Crossing & Ancillary Works Construction by Private Contractor application to obtain consent for the appointed contactor to carry out works. ***No work shall commence without the written permission from Council.***

10. Preliminary Vehicular Crossing & Ancillary Works Application

Prior to the lodgement of the Preliminary Vehicular Crossing & Ancillary Works Application form, please ensure that:

1. You have checked the proposed location of your Vehicular Crossing on site and determined whether it will affect any existing service drainage pits/culverts, street trees etc.

Document Set ID: 4375676
Version: 17, Version Date: 10/09/2025

2. If any of the above services/items are affected, you have consulted with Council and/or the relevant utilities provider and approval has been given to remove or relocate the services/item(s). Note: the costs associated with the removal/ relocation must be borne by the applicant.
3. The Applicant has read this Specification and is fully aware of any limitations and/or constraints, which may preclude the approval of a Vehicular Crossing;
4. The Applicant is required to submit a longitudinal profile of proposed Vehicular Crossing(s) complying with the AS/NZS 2890:1:2004 “Off street parking” code to Council for review. This is required where the applicant is requesting to construct a new Vehicular Crossing crossover or reconstruct an existing Vehicular Crossing crossover. You may need to consult with an architect or engineer to provide you with the required Vehicular Crossing levels and design.
5. In exceptional circumstances, e.g. due to omission of information on the part of the applicant and notwithstanding Section 2 above, Council may consider that the construction of a Vehicular Crossing at the proposed location or site is inappropriate or impractical. The Applicant will then be advised accordingly in writing.

11. Persons who can construct the Vehicular Crossing

The applicant is to appoint their own contractor to carry out works by submitting a Vehicular Crossing and Ancillary Works Construction by Private Contractor application form. NOTE: You **cannot** apply to appoint your own contractor until you have received, in writing, Preliminary Vehicular Crossing &/or Ancillary Works consent.

To ensure that the quality of the work is maintained and public safety is not compromised, the nominated Contractor must have experience in concrete works especially in the construction of vehicle crossings with appropriate Public Liability insurance cover.

A Contractor may be eligible to carry out the works provided that:

- A copy of the Certificate of Currency for Public Liability insurance is provided to Council. The insurance cover shall be for a sum not less than $A20,000,000 for a period of six (6) months, and nominating on the policy the City of Canada Bay Council as indemnifying them against public risk claims, arising during the construction of the crossing or as a result of the construction of the crossing;
- A copy of the Contractor's current and valid Concreter License;
- Traffic Guidance Scheme (TGS) for all “Collector Road” status or higher. The TGS **MUST** be certified by two suitably qualified Prepare Work Zone (PWZ) ticket holder.
- All required inspection fees, as identified in the consent for proposed Preliminary Vehicular crossing & Ancillary Works, must be paid at the time of submission of the Construction by Private Contractor Application, and prior to any works commencing. These fees are in line with Council’s fees and charges and are non-refundable. This fee applies to each Vehicular Crossing applied for per property.
- A bond, as set down in Council's Fees and Charges lodged prior to any works commencing. This bond is refundable upon satisfactory completion of the works, at the discretion of Council's Engineer. Council will hold your bond until all works have been completed.
- If all of the above requirements are not satisfied, the application may be rejected and a further fee, as set down in Council's Fees and Charges will be required before reconsideration.

12. Supervision

Works are to be carried out in accordance with this specification and relevant standards.

No work is to be carried out except under the supervision and approval of Council's Engineer.

Council's Engineer shall meet with the nominated Contractor/Owner to carry out mandatory inspections for the purpose of:

- **Pre-Excavation inspection** - at least forty-eight (48) hours’ notice must be given
- **Formwork inspection** - at least forty-eight (48) hours’ notice must be given for checking timbering for alignment, level and stability and subgrade preparation.

Document Set ID: 4375676
Version: 17, Version Date: 10/09/2025

- **Final inspection** - the Owner or Contractor shall notify Council's Engineer for a Final inspection once the concrete has been poured and finished, formwork removed and area restored. At least forty-eight (48) hours' notice must be given.
- To request an inspection time, contact Council's Customer Experience team on 9911 6555. The request will be passed onto Council's City Services & Assets, Infrastructure Services department who will then confirm your appointment time.

If more inspections are required above the mandatory inspections due to any omission or unsatisfactory work, including the storage of materials, insufficient barricading and site safety, on the part of the applicant or contractor, Council reserves the right to recover the cost of additional inspections or remedial actions that it may take from the applicant, as per Council's Fees and Charges.

13. Alteration to Utility Services

Any alteration, which may be necessary, for the construction of the vehicle crossing, to any water, sewer, gas, electricity, telecommunication, stormwater system, and other utility services is to be arranged by the contractor with the relevant utility authority.

The protective boxes over any hydrant, gas cocks, stop valves, sewer lines, and the like shall be adjusted by the contractor, in consultation with the relevant utility authority, so that they are flush with the finished surface.
The contractor is responsible for the physical location of all utility services likely to affect the proposed works. The contractor is liable for any damage to service utilities. The contractor is required to contact 'Dial Before You Dig' (DBYD) before any work commences.

Any cost incurred as part of the adjustment will be borne by the applicant.
Where an existing or proposed stormwater pipe traverses the proposed Vehicular Crossing, and there is insufficient cover over the pipe, the section of pipe shall be converted to a galvanised steel rectangular hollow section (RHS), approximately sized for the specified flow rate across the footpath, to achieve adequate cover. Alternatively, relocate the pipe, where possible, away from the Vehicular Crossing.

14. Provision for Traffic

The contractor is responsible for the safe passage of pedestrian and vehicular traffic. During the progress of the works, all necessary warning notices, barricades and lights must be installed, in accordance with AS1742.3 - 1996, traffic control devices for works on roads.

Where the works require traffic control, the contractor will be responsible for appropriate traffic control devices being put in place, including necessary lamp signage, maintenance and the like in accordance with AS1742.3 – 1996. Council Officers may, if deemed necessary, stop the work from proceeding and refer the matter to Council's Rangers to enforce and issue Infringement Notice.

Where works are to be carried out on roads of a "Collector Road" status or higher, and obstruction to traffic is unavoidable, a Traffic Control Plan must be submitted with the application to Council, endorsed by the Police and relevant authorities e.g. RMS, for approval. This plan is to be prepared in compliance with AS1742.3. A minimum notification period not less than ten (10) working days shall be provided prior to the commencement of works. If RMS approval is required, the RMS will issue a Road Occupancy Licence (ROL), which will detail the hours during which such work may occur.

These ancillaries should be included in the total cost towards the works.

Document Set ID: 4375676
Version: 17, Version Date: 10/09/2025

15. Proposed Road Design Affecting Vehicular Crossing Levels

Where a proposed design has been prepared by Council to alter the carriageway and footpath fronting the property concerned, the work shall be done in conformity with the proposed design. Information for this purpose shall be supplied by Council's Engineer.

Where Council has a proposal to modify the area at the front of the property but a proposed design has not yet been prepared, the work shall be set out in accordance with the best available information and in accordance with this specification and any relevant standards. This should be done on the understanding that if Council should carry out future construction works to a proposed design, which may involve the alteration to part or whole of any of the constructed work, then the usual contribution which would be payable had no work been carried out, will be levied. This must be paid by the property owner, in accordance with the Roads Act, at the time when the Council proposed works are to be carried out.

16. Public Safety

The contractor shall be liable for any accident, damage or injury to persons or property resulting from the work. In this regard, the Contractor must have appropriate and current public liability insurance to this effect.

17. Compliance with other Acts

Works shall be carried out in compliance with The Clean Waters Act, The Roads Act, The Motor Traffic Act and the Occupational Health and Safety Act, and any other Acts as deemed relevant.

18. Hours of Construction/Demolition

The hours of construction/demolition shall be restricted to 7.00am to 5.00pm, Mondays to Fridays and 8.00am to 1.00pm Saturdays, with a total exclusion of work on Sundays and Public Holidays. The only exception to these hours is where a ROL is issued by the RMS that specifies work hours outside of the times specified above.

Note: The Protection of the Environment Operations Act 1997 may preclude the operation of some equipment on site during these permitted working hours.

19. Preparation & Excavation

The Contractor shall excavate to the full depth required for the specified thickness of the proposed crossing slab.

In rock, clay or unstable foundation material, additional excavation shall be carried out and a sub-base of sand, or other approved material, to a minimum depth of 75mm consolidated thickness, shall be provided.

The sub-grade or sub-base shall be adequately compacted to the required minimum depth of 150mm to the following requirements:

- Sands - density index of 70% in accordance with AS 1289.E3.1 where the compaction test is in accordance with AS 1289.E5.1.
- Material other than sand - dry density rates in accordance with AS 1289.E4.1 of more than 98% where the compaction test is in accordance with AS 1289.E1.1 (standard).

The surface adjacent to the proposed Vehicular Crossing shall be trimmed to conform generally thereto to the levels and crossfall similar to the adjoining area, unless otherwise instructed by Council's Engineer. This shall include lifting and resetting footpath lawns where necessary.

It is also the responsibility of the applicant to ensure that new lawns are watered and maintained to avoid grass dying off.

Document Set ID: 4375676
Version: 17, Version Date: 10/09/2025

20. Minimum Slab Thickness

All work is to be carried out in accordance with Council's standard details, where applicable, and this Specification. Gutters and gutter crossings (laybacks) shall have a minimum uniform thickness of 150mm (or 180mm for commercial and industrial sites).

The crossing slab thickness shall be a minimum of:

- 125mm with SL72 fabric - for residential developments; and
- 200mm with two layers of SL72 fabric - for commercial and industrial developments;
- Concrete paths shall be a minimum of 75mm in thickness to match existing pathways unless directed otherwise by Council's Engineer.

21. Material

All vehicle crossing slabs and laybacks are to be constructed in plain concrete with a minimum compressive strength of 32MPa at 28 days.

Ready mixed concrete conforming to AS1379-1973 shall be used. The Contractor is to arrange for certificates by the manufacturer to be given for all concrete delivered and shall be able to produce these to Council's Engineer upon request.

Construction of Vehicular Crossings, within the road reserve, using brick pavers, coloured, stained, stamped or patterned concrete, pebblecrete, or any other cosmetic material other than plain concrete will no longer be approved.

Where filling under the proposed concrete is necessary, such filling shall consist of granular material of maximum size of 40mm and shall be spread in layers of a maximum thickness of 150mm and consolidated to provide a 98% compaction when tested under the Modified Proctor Method.

22. Expansion & Construction Joints

Construction and expansion joints shall be provided to the full depth of the slab, at each side of the slab, as shown on the approved plans, where required or as directed by Council's Engineer. The joint shall be filled with a 10mm thick bitumen impregnated material such as a compressible mastic board. Other types of jointing material can only be used at the approval of Council's Engineer. Expansion joints shall separate the concrete apron from the Vehicular Crossing area that it adjoins, that is, in the line with the leading edge of the path.

Concrete footpaths of a minimum standard width of 1.2 metres, shall have expansion joints every 6.0 metres with dummy (tooled) joints to match existing pathways or at 1.2 metre intervals, unless specified otherwise by Council's Engineer. Generally dummy (tooled) joint spacings should match the adjoining pavement. For large area replacements, the width of the approved path shall be the spacing of the dummy (tooled) joints.

23. Finish

Council will only allow standard plain concrete finishes to vehicle crossings. Brick-pavers, stamped or patterned finish will not be accepted.

The concrete surface shall be finished true and even, free from air and stone pockets, depressions and projections. The concrete shall be tamped and screeded to the correct surface levels and shall be given an even non-skid finish. The crossings are to be **“Cove”** finished. The path section behind the apron shall also be **“Cove”** finished across the path. All edges of the slab shall be rounded with a 50mm edging tool.

In general, Vehicular Crossings should have a slip resistance appropriate for the pavement slopes in accordance with AS3600.

Document Set ID: 4375676
Version: 17, Version Date: 10/09/2025

24. Ancillary Works

Ancillary Works includes other infrastructure located in the public domain. This includes, but is not restricted to, items such as:

- Footpaths;
- Kerb & gutter;
- Pram ramps;
- Drainage pits and lintels;
- Drainage pipes
- Traffic islands;
- Road pavement.

Council's design requirements for the above categories shall be provided on request. Dilapidation Reports shall note the condition of any surrounding infrastructure to ensure liability issues are addressed prior to commencement of any works. Any rectification required shall be in accordance with Council's design standards.

25. Final Approval

Council will notify the owner in writing of the Final Approval of the work. Any defects found during the Final Inspection must be remedied. This is the responsibility of the owner and therefore it is advised that final payment will not be made to the Contractor until such approval has been received.

Once the Vehicular Crossing is completed and Council is satisfied with the works, a refund of the crossing bond will be arranged.

26. Compliance

Compliance with this Specification

Failure to comply with this specification may result in the refusal In the case of an illegally constructed or non-complying constructed Vehicular Crossing, Council will reinstate the area and all costs associated with the restoration will be recovered by Council, through the deduction of the security deposit held by Council.

Illegal/Unauthorised Works


Failure to obtain approval from Civil Infrastructure Department and commencing works without written approval may result in the following actions:

- Applicant to be issued with a penalty infringement &/or 'Stop Work' notice.
- Illegal works to be demolished and area restored
- Non-certification of the works
- An amount to be deducted from the Security Deposit for costs that would have been incurred in assessing and processing the Application, and conducting inspections to assess the illegal / unauthorised work.
- An amount to be deducted from the Security Deposit incurred by Council to rectify the works.

Council also reserves the right to use the security deposit to carry out rectification works resulting from incomplete &/or non-compliant works.Council may request that the applicant provide, at their cost, a compliance certificate from a suitably Qualified Engineer, with Corporate Membership standing in the Institution of Engineers, Australia, and registered on the National Professional Engineers Register (NPER) under the appropriate professional category, certifying that the Vehicular Crossing &/or Ancillary Works complies with AS/NZS2890.1:2004


Document Set ID: 4375676
Version: 17, Version Date: 10/09/2025

27. Diagrams

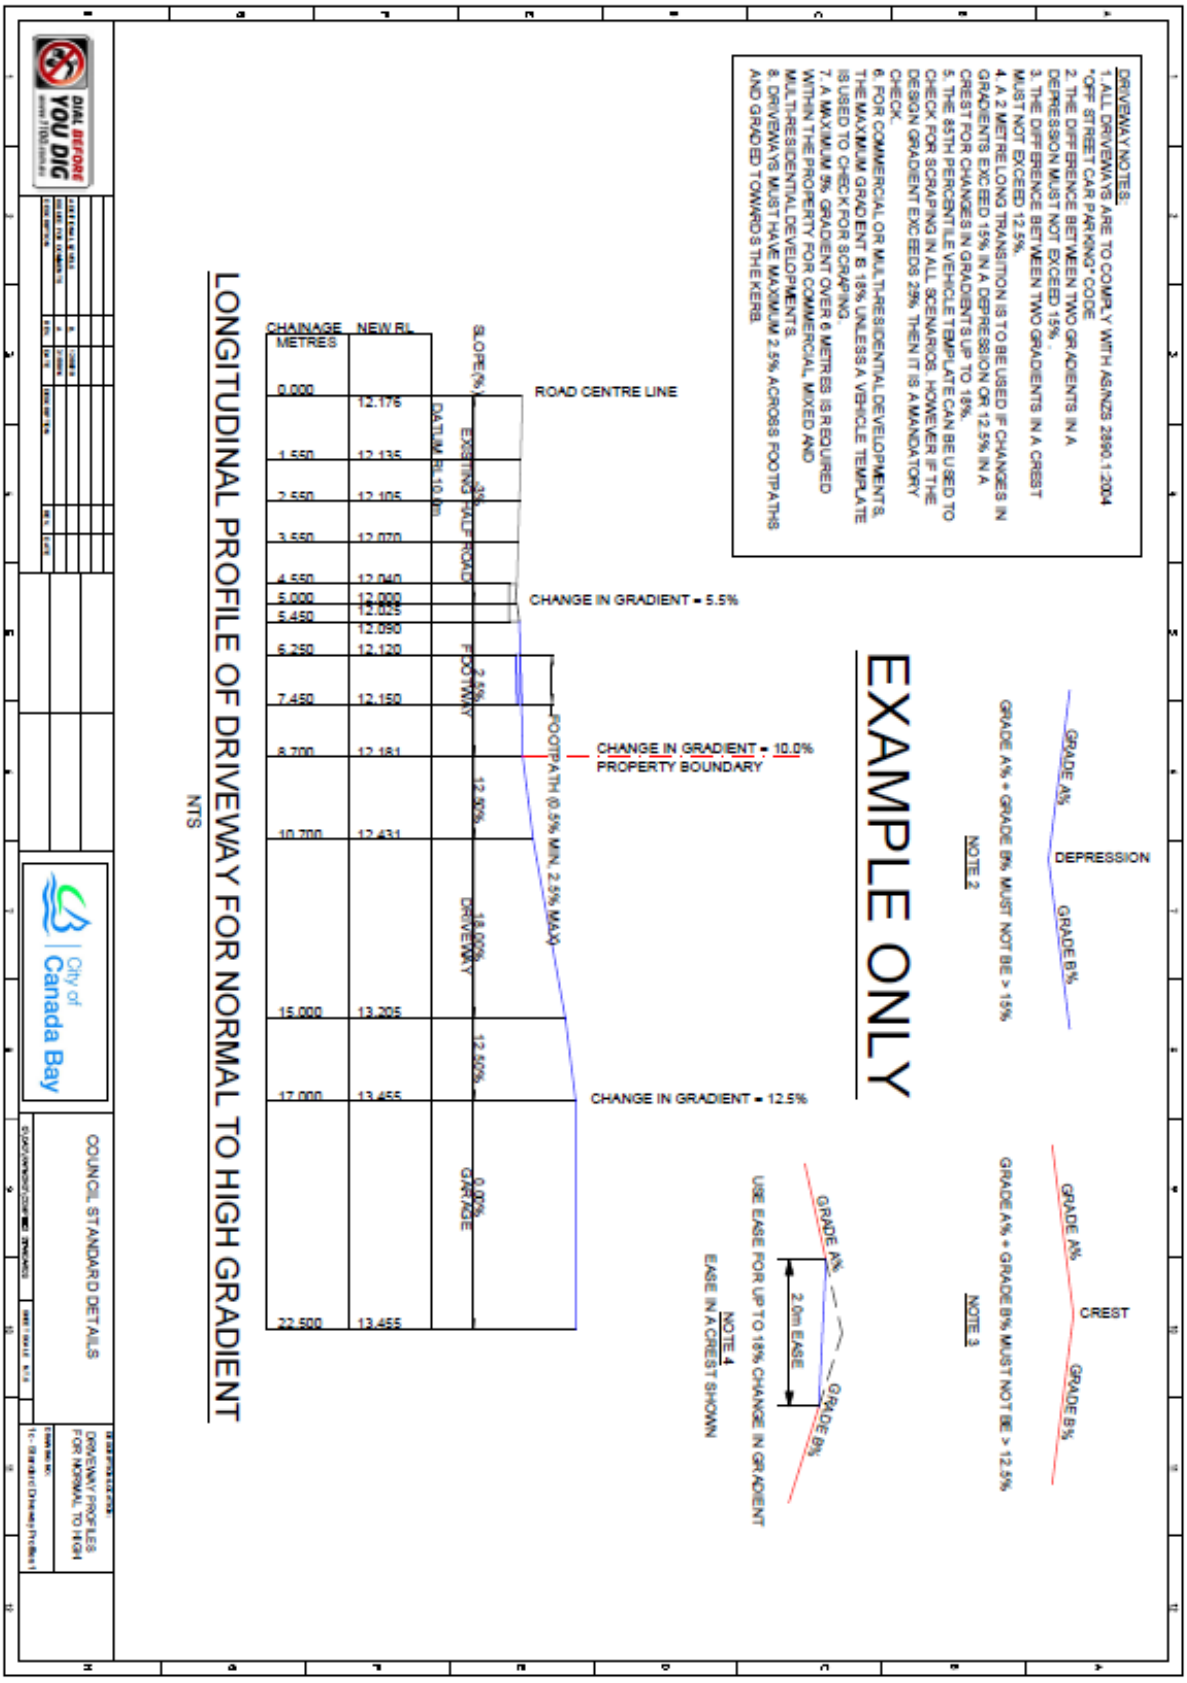


28.1 – Longitudinal Profile of Vehicular Crossing for Normal to High Gradient - Example

Document Set ID: 4375676
Version: 17, Version Date: 10/09/2025

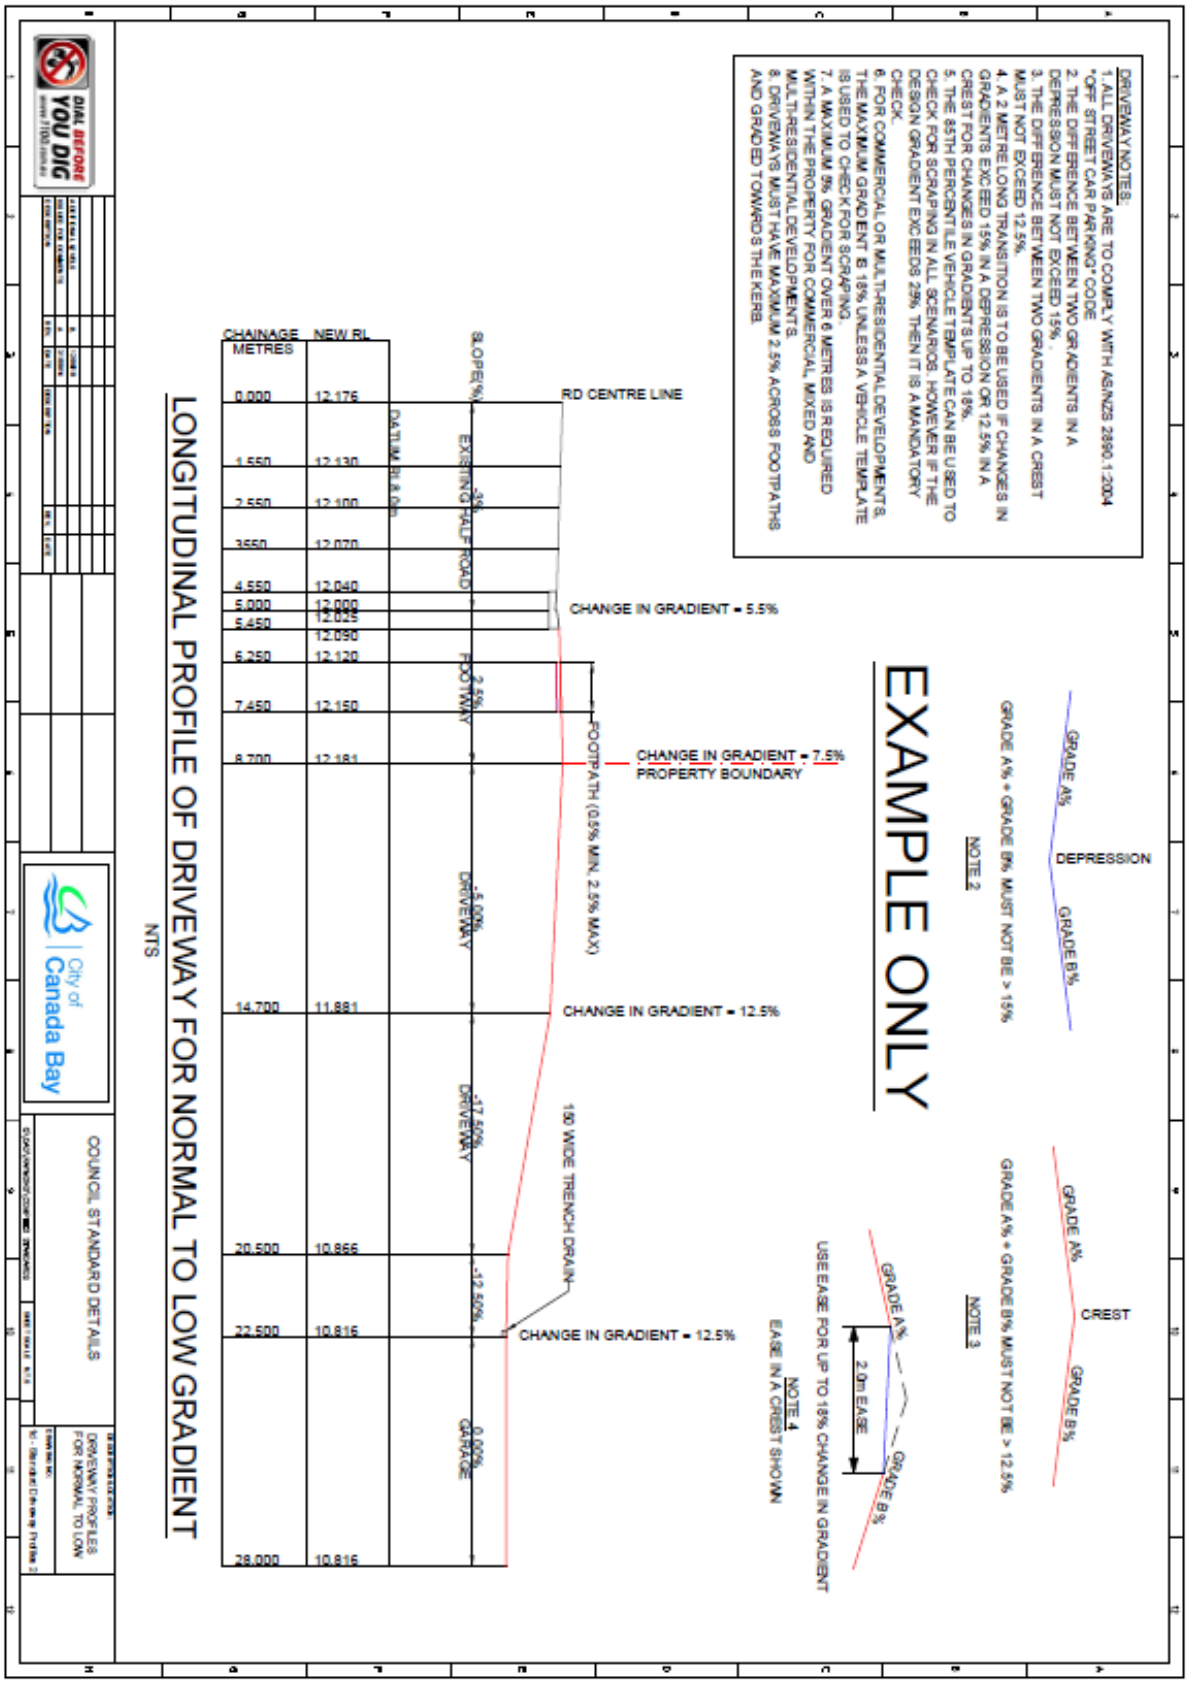

Document Set ID: 4375676
Version: 17, Version Date: 10/09/2025

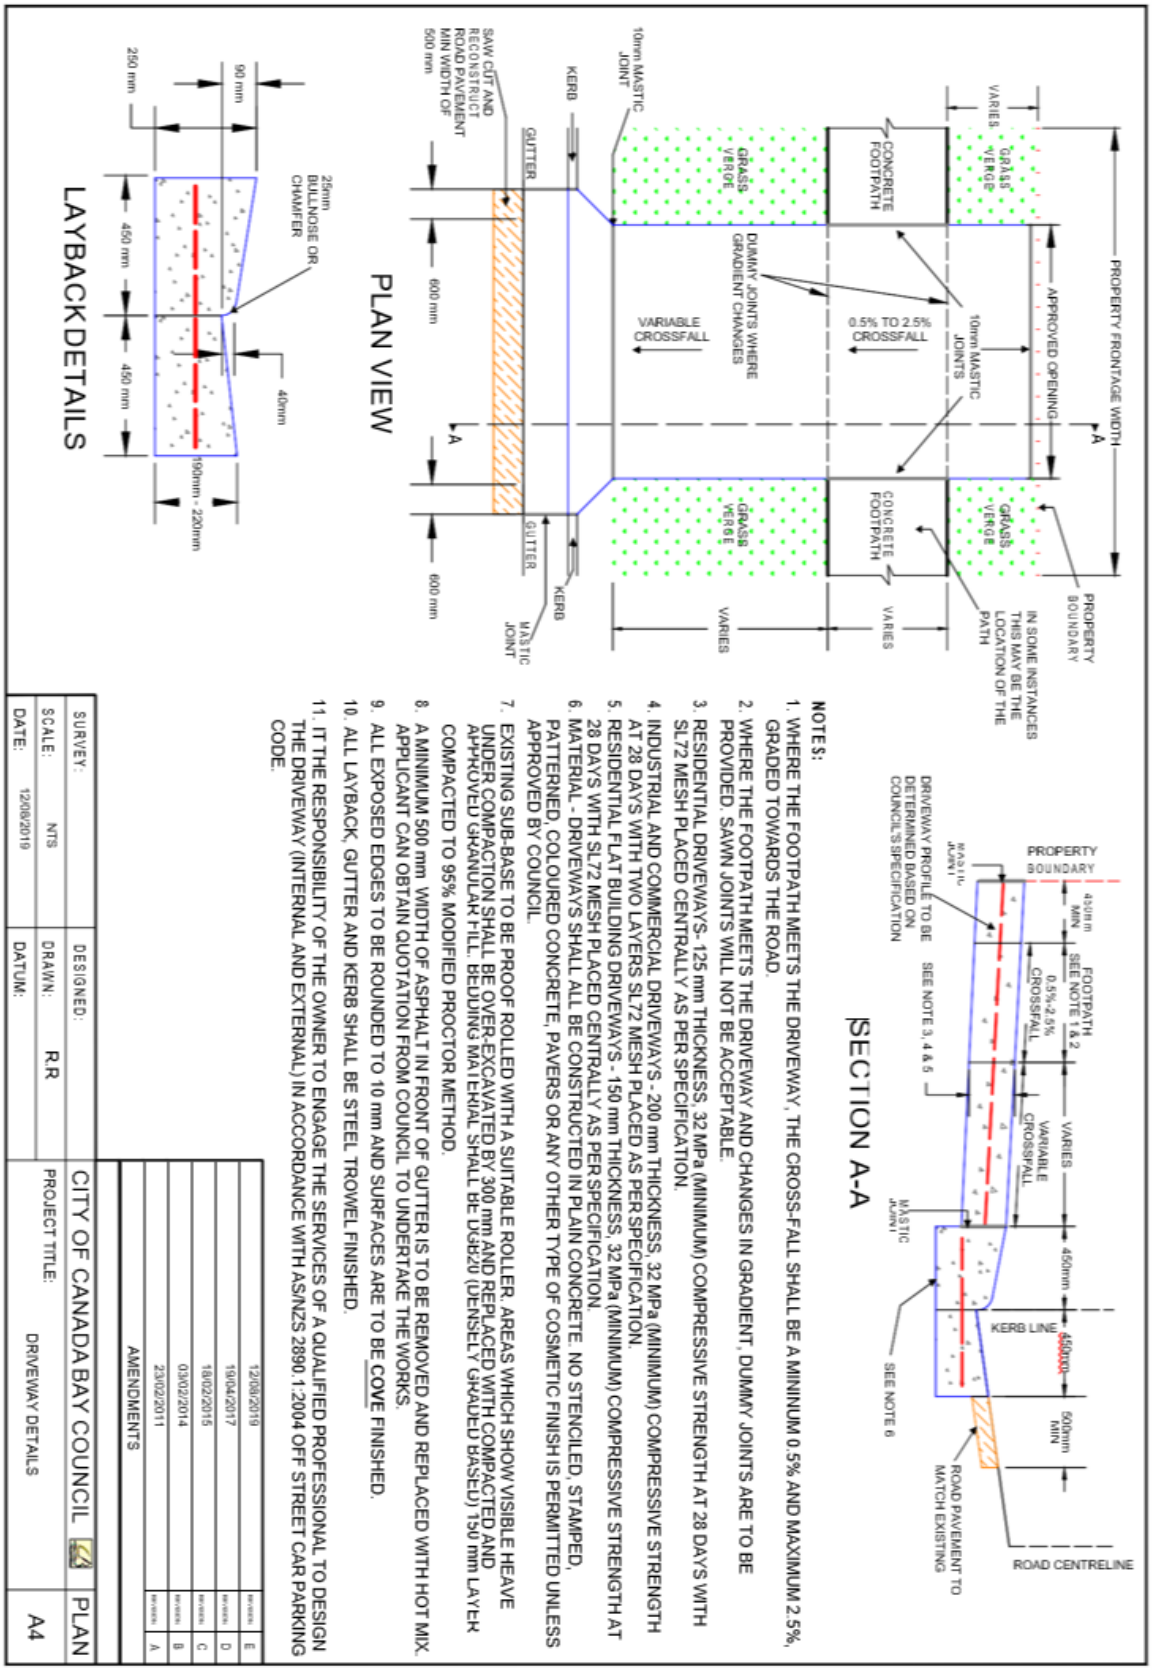

NOTES:

1. WHERE THE FOOTPATH MEETS THE DRIVEWAY, THE CROSS-FALL SHALL BE A MININUM 0.5% AND MAXIMUM 2.5%, GRADED TOWARDS THE ROAD.
2. WHERE THE FOOTPATH MEETS THE DRIVEWAY AND CHANGES IN GRADIENT, DUMMY JOINTS ARE TO BE PROVIDED. SAWN JOINTS WILL NOT BE ACCEPTABLE.
3. RESIDENTIAL DRIVEWAYS- 125 mm THICKNESS, 32 MPa (MINIMUM) COMPRESSIVE STRENGTH AT 28 DAYS WITH SL72 MESH PLACED CENTRALLY AS PER SPECIFICATION.
4. INDUSTRIAL AND COMMERCIAL DRIVEWAYS - 200 mm THICKNESS, 32 MPa (MINIMUM) COMPRESSIVE STRENGTH AT 28 DAYS WITH TWO LAYERS SL72 MESH PLACED AS PER SPECIFICATION.
5. RESIDENTIAL FLAT BUILDING DRIVEWAYS - 150 mm THICKNESS, 32 MPa (MINIMUM) COMPRESSIVE STRENGTH AT 28 DAYS WITH SL72 MESH PLACED CENTRALLY AS PER SPECIFICATION.
6. MATERIAL - DRIVEWAYS SHALL ALL BE CONSTRUCTED IN PLAIN CONCRETE. NO STENCILED, STAMPED, PATTERNED, COLOURED CONCRETE, PAVERS OR ANY OTHER TYPE OF COSMETIC FINISH IS PERMITTED UNLESS APPROVED BY COUNCIL.
7. EXISTING SUB-BASE TO BE PROOF ROLLED WITH A SUITABLE ROLLER. AREAS WHICH SHOW VISIBLE HEAVE UNDER COMPACTION SHALL BE OVER-EXCAVATED BY 300 mm AND REPLACED WITH COMPACTED AND APPROVED GRANULAR FILL. BEDDING MATERIAL SHALL BE DGB20 (DENSELY GRADED BASED) 150 mm LAYER COMPACTED TO 95% MODIFIED PROCTOR METHOD.
8. A MINIMUM 500 mm WIDTH OF ASPHALT IN FRONT OF GUTTER IS TO BE REMOVED AND REPLACED WITH HOT MIX. APPLICANT CAN OBTAIN QUOTATION FROM COUNCIL TO UNDERTAKE THE WORKS.
9. ALL EXPOSED EDGES TO BE ROUNDED TO 10 mm AND SURFACES ARE TO BE COVE FINISHED.
10. ALL LAYBACK, GUTTER AND KERB SHALL BE STEEL TROWEL FINISHED.
11. IT THE RESPONSIBILITY OF THE OWNER TO ENGAGE THE SERVICES OF A QUALIFIED PROFESSIONAL TO DESIGN THE DRIVEWAY (INTERNAL AND EXTERNAL) IN ACCORDANCE WITH AS/NZS 2890.1:2004 OFF STREET CAR PARKING CODE.

SURVEY:	DESIGNED:	AMENDMENTS	
SCALE: NTS	DRAWN: R.R	12/08/2019	E
DATE: 12/08/2019	DATUM:	19/04/2017	D
		18/02/2015	C
		03/02/2014	B
		23/02/2011	A

CITY OF CANADA BAY COUNCIL

PROJECT TITLE: DRIVEWAY DETAILS

PLAN A4

Document Set ID: 4375676
Version: 17, Version Date: 10/09/2025

This page is intentionally left blank

1a Marlborough Street, **Drummoyne** NSW 2047
Tel 9911 6555 **Fax** 9911 6550 **www.canadabay.nsw.gov.au**

Document Set ID: 4375676
Version: 17, Version Date: 10/09/2025