Contents

15. CAR PARKING 15.1
15.1 BACKGROUND 15.1
15.2 OBJECTIVES 15.1
15.3 RELATIONSHIP BETWEEN ON-STREET AND OFF-STREET CAR PARKING 15.2
15.4 PARKING REQUIREMENTS 15.2
DELIVERY AND SERVICE VEHICLES 15.5
15.5 PARKING AREA DESIGN AND LAYOUT 15.5
ENCLOSED PARKING SPACES 15.7
15.6 PARKING AREA CONSTRUCTION 15.8
PO 15.6-1 PLANNING OUTCOMES – OFF-STREET CAR PARKING 15.8

15. CAR PARKING

15.1 BACKGROUND



Photograph - Car Parking in Anson Street

From the 1996 Census, it is estimated that there are an average of 1.38 cars per dwelling in Orange. The Canobolas rural area has the highest proportion of cars per dwelling, with 2.16 cars per dwelling, while the lowest proportion of cars per dwelling is in the CBD at 0.81.

The highest proportion of cars per dwelling generally occurs in rural areas and in the urban-release areas.

Orange is a regional centre that is the focus for an extensive rural area. There is a relatively high usage of private vehicles in the City. Car parking therefore needs to be provided in conjunction with development to meet demand in the City.

15.2 OBJECTIVES

Objectives for the provision of car parking associated with development are:

- to make provision for car parking in association with development in order that the demand for parking in the City can be met;

- to ensure that the design and layout of car parking facilitates the safe and effective use of off-street parking.

Under Clause 8 of Orange LEP 2000, Council is required to consider a number of specific matters where relevant. For the purposes of Clause 8, car parking is deemed to be a relevant matter for considering the cumulative impact of a development where the development will involve the likely generation of vehicular traffic.

15.3 RELATIONSHIP BETWEEN ON-STREET AND OFF-STREET CAR PARKING

Adequate off-street parking is required to supplement on-street parking and thereby maintain the existing levels of service and safety of the road network. It is recognised that even where off-street parking is provided, on-street parking will still occur in designated areas.

On-street parking can also provide pedestrians with a feeling of safety from passing traffic by creating a barrier between the footpath and passing traffic.

Parking requirements set out in section 15.4 below reflect the peak-parking demand anticipated. In certain circumstances, such as with small extensions to existing developments, consideration might be given to reducing the on-site parking required because of the availability of convenient on-street parking. The onus is on the applicant to prove that such a concession is appropriate, with a report submitted by a qualified town planner or traffic engineer.

15.4 PARKING REQUIREMENTS

Off-street car parking spaces are required to be provided at the following rates for specific land uses:

TYPE OF DEVELOPMENT	**MINIMUM REQUIREMENTS**
RESIDENTIAL	
Dwelling house	A minimum of 1 space but preferably 2
Residential units, dual occupancies	One-bedroom unit 1.0 space per unit Two-bedroom unit 1.2 spaces per unit Three (or more-bedroom unit 1.5 spaces per unit Visitors 0.2 spaces per unit
Housing for aged or disabled persons	As per SEPP 5
CASUAL ACCOMMODATION	
Bed & Breakfast accommodation, guest houses	1 space for every unit or bedroom provided for paying customers. + 1 space for residents + 1 space for every 3 seats provided in a public restaurant.
Motels; hotel or tourist accommodation	1 space per unit/ bedroom/tent or caravan site 1 space for every 3 beds (hostel accommodation) + 1 space for each resident manager + 1 space for every 2 employees + 1 space for every 3 seats in the restaurant, + 1 space per $10m^2$ of entertainment or function room areas.

TYPE OF DEVELOPMENT	MINIMUM REQUIREMENTS
ENTERTAINMENT & RECREATION	
Hotels (outside the CBD)	1 space per 10m^2 of bar, gaming room, restaurant, entertainment or function room areas
Hotels (in the CBD)	1 space per 25m^2 of bar, restaurant, entertainment or function room areas
Registered club	As for hotels and subject to reasonable assessment of cumulative peak-parking demand for each activity
The above rates of parking provision are recommended. It is recommended that proposed hotel developments be compared with similar existing developments, noting the existing supply of and demand for parking in the area and the peak-parking periods of individual facilities within the hotel. For extensions to existing hotels, surveys should be undertaken of the current usage pattern and parking demands of the hotel.	
Restaurants (outside the CBD)	1 space per 10m^2 of GFA or 1 space for every 3 seats whichever is greater
Gymnasiums/fitness centres	7.5 spaces per 100m^2 GFA
Cinemas or theatres	1 space for every 10 seats
BUSINESS OR RETAIL ACTIVITIES	
Office or business premises, including banks	1 space per 40m^2 GFA
Shops and shopping centres	0-10,000m^2 GLFA 6.1 spaces/100m^2 GLFA 10,000-20,000m^2 GLFA 5.6 spaces/100m^2 GLFA 20,000-30,000m^2 GLFA 4.3 spaces/100m^2 GLFA over 30,000m^2 GLFA 4.1 spaces/100m^2 GLFA within the CBD 4.1 spaces/100m^2 GLFA
Restaurants in the CBD	1 space per 40m^2 of GFA
Service stations	A combined total of: 3 spaces for each workbay; 1 space per 25m^2 GFA of shop, convenience store, or payment area.
Home business in a dwelling	1 space for the use of the dwelling + 1 space for each employee who will occupy the site at any one time + 1 space for customer parking
Home business involving buildings in addition to a dwelling house (sheds garages etc,)	As for home business in a dwelling plus parking calculated for the use as described elsewhere in the Table.
Bulk retail	1 space for 50m^2 GFA
Motor showroom	1 space per 100m^2 site area plus 3 spaces for every workbay for vehicle servicing, with such spaces exclusive of cars displayed for sale.

TYPE OF DEVELOPMENT	MINIMUM REQUIREMENTS
Fast-food outlet	Developments with no on-site seating or drive-through facilities: 12 spaces per 100m^2 GFA Developments with on-site seating but no drive-through facilities: 12 spaces per 100m^2 GFA, plus the greater of: • 1 space per 5 seats (both internal and external seating) • 1 space per 2 seats (internal seating) Development with on-site seating and drive-through facilities, the greater of: • 1 space per 2 seats (internal seating) • 1 space per 3 seats (internal and external seating)
Plus an extension area for queuing of cars for a drive-through facility is required (queue length of 5 to 12 cars measured from pick-up point). There should also be a minimum of 4 car spaces for cars queued from the ordering point.	
Plant nurseries	0.5 spaces per 100m² of site area or a minimum of 15 spaces, whichever is the greater
INDUSTRIES AND TRADE SERVICES	
Industries and warehouses (Note: parking requirements are the same for these uses to facilitate changes of use.)	1 space per 100m^2 GFA or 1 space for every 2 employees whichever is the greater. Employee numbers are calculated on the proposed number to operate for the peak shift.
Vehicle-repair station	3 spaces per workbay or 3 spaces for every 100m^2 GFA whichever is the greater plus a designated area for vehicles required to be kept on the premises for more than one working day.
Depots	2 spaces for every 3 employees
HEALTH AND COMMUNITY SERVICES	
Health consulting rooms (outside CBD)	2 spaces for every 1 practitioner with spaces being available for customer and staff use
Hospital	1 space for every 3 beds + 1 space for each resident doctor and 1 space for every 2 visiting doctor + 1 space for every 2 employees
Child care centres	1 space for every 4 children in attendance
Gymnasium, health and fitness centres	4 spaces per 100m^2 GFA
Educational establishments: Schools and higher-educational facilities (TAFE, universities)	1 space for every 2 employees + 1 space per 10 students over 17 years of age in attendance Additional parking is to be determined by Council where on-site residential accommodation is provided based on the peak-parking demand anticipated for the development.
Places of worship	1 space per 10m^2 GFA or 1 space for every 10 seats whichever is the greater + 1 space for every residence on-site.

The above rates are applied to the net increase in parking demand as a consequence of a change of use, alterations, additions to existing buildings and to new buildings or new use of the land.

For development not listed above, the number of parking spaces required will be determined by Council taking into account the likely peak-parking demand that will be generated from the development. Council may require a professionally-prepared report detailing peak-parking accumulation for the development.

Where a parking requirement under this Plan is different from that which applied at the time of consideration of a previous development application for the land, the rate of parking requirement used to calculate the net increase in parking demand will be that which applied in the determination of the most recently considered development application that applied to that land.

Notwithstanding the above, the net increase provisions will not apply if the use of those provisions will result in a shortfall in onsite parking and such shortfall is likely to have an unacceptable environmental impact in the locality.

DELIVERY AND SERVICE VEHICLES

Provision is to be made on-site or at a convenient location for the type of delivery or service vehicle appropriate to the type of development. Consideration is to be given to the type of vehicles that are likely to service the site.

Specific provision is to be made for, but not limited to, on-site areas for delivery and service vehicle parking and manoeuvring for the following uses:

- shops, business premises, restaurants and offices
- supermarkets, shopping centres and department stores
- bulk retail
- industries and warehouses
- hotels and motels
- hospitals
- educational establishments

Reference should be given to *Australian Standard AS2890.2 Commercial vehicles* and *RTA Guide to Traffic Generating Developments*

15.5 PARKING AREA DESIGN AND LAYOUT

The design and layout of parking areas (including physical controls, signage and line-marking is to comply with Australian Standard AS2890.1 – 2004 Off Street Parking.

All off-street parking spaces in the City are to be designed for the relevant user class as described in Table 1.1 of AS2890.1 –2004 below:

TABLE 1.1

CLASSIFICATION OF OFF-STREET CAR PARKING FACILITIES

User class	Required door opening	Required aisle width	Examples of uses (Note 1)
1	Front door, first stop	Minimum for single manoeuvre entry and exit	Employee and commuter parking (generally, all-day parking)
1A	Front door, first stop	Three-point turn entry and exit into 90° parking spaces only, otherwise as for User Class 1	Residential, domestic and employee parking
2	Full opening, all doors	Minimum for single manoeuvre entry and exit	Long-term city and town centre parking, sports facilities, entertainment centres, hotels, motels, airport visitors (generally medium-term parking)
3	Full opening, all doors	Minimum for single manoeuvre entry and exit	Short-term city and town centre parking, parking stations, hospital and medical centres
3A	Full opening, all doors	Additional allowance above minimum single manoeuvre width to facilitate entry and exit	Short term, high turnover parking at shopping centres
4	Size requirements are specified in AS/NZS 2890.6 (Note 2)		Parking for people with disabilities

NOTES:


1 Except for the requirements specified in Clause 1.4 relating to User Classes 1A and 4, the examples of uses are intended to be flexible and allow for progressive improvement both in the ease of manoeuvring into and out of parking spaces, and in leaving and re-entering the vehicle as one progresses up the user class scale from 1 to 3A. The modelling of vehicle manoeuvring into Class 1A spaces shows however, that many drivers may have difficulty driving into and out of such spaces, especially those with vehicles larger than the B85 vehicle. Furthermore, they may have difficulty entering and leaving the vehicle in the narrower spaces. Safety issues associated with delays and congestion caused by manoeuvres into and out of Class 1A spaces in large parking areas should also be taken into account. See also Appendix B, Paragraph B4.8.

2 In preparation, see footnote to Clause 1.2.

AS2890.1 – 2004 – Table 1.1


The layout for angle-parking spaces is to be in accordance with Figure 2.2 of AS2890.1 – 2004 Off Street Parking, as shown below:

AS/NZS 2890.1:2004

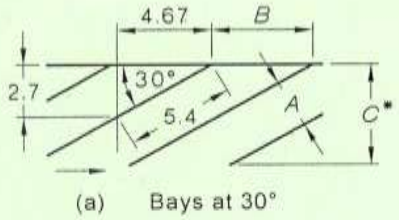


(a) Bays at 30°

User class (Note 1)	A (Notes 2 & 3)	B	C_1	C_2	C_3	Aisle width
1,1A	2.1	4.2	4.4	4.1	4.5	3.1
2	2.3	4.6	4.4	4.1	4.7	3.0
3	2.5	5.0	4.4	4.1	4.9	2.9
3A	2.5	5.0	4.4	4.1	4.9	3.45

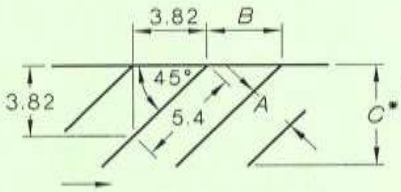

(b) Bays at 45°

User class (Note 1)	A (Note 3)	B	C_1	C_2	C_3	Aisle width
1,1A	2.4	3.4	5.2	4.8	5.5	3.9
2	2.5	3.5	5.2	4.8	5.6	3.7
3	2.6	3.7	5.2	4.8	5.7	3.5
3A	2.6	3.7	5.2	4.8	5.7	4.2
4	(See Note 5)					

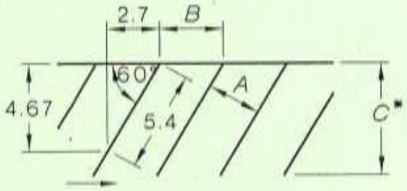

(c) Bays at 60°

User class (Note 1)	A (Note 3)	B	C_1	C_2	C_3	Aisle width
1,1A	2.4	2.75	5.7	5.1	5.9	4.9
2	2.5	2.90	5.7	5.1	6.0	4.6
3	2.6	3.00	5.7	5.1	6.0	4.3
3A	2.6	3.00	5.7	5.1	6.0	5.1
4	(See Note 5)					



(d) Bays at 90°

User class (Note 1)	A (Note 3)	B	C_1	C_2	C_3	Aisle width (Note 4)
1	2.4	2.4	5.4	4.8	5.4	6.2
1A	2.4	2.4	5.4	4.8	5.4	5.8
2	2.5	2.5	5.4	4.8	5.4	5.8
3	2.6	2.6	5.4	4.8	5.4	5.8
3A	2.6	2.6	5.4	4.8	5.4	6.6
3A	2.7	2.7	5.4	4.8	5.4	6.2
4	(See Note 5)					

*Dimension C is selected as follows (see Note 6):
C1—where parking is to a wall or high kerb not allowing any overhang.
C2—where parking is to a low kerb which allows 600 mm overhang in accordance with Clause 2.4.1(a)(i).
C3—where parking is controlled by wheelstops installed at right angles to the direction of parking, or where the ends of parking spaces form a sawtooth pattern, e.g. as shown in the upper half of Figure 2.4(b).

For Notes—see over.

DIMENSIONS IN METRES

FIGURE 2.2 LAYOUTS FOR ANGLE PARKING SPACES

AS2890.1 – 2004 – Figure 2.2 Layouts for Angle Parking Spaces

Refer to AS2890.1 – 2004 Off Street Parking for further detail.

ENCLOSED PARKING SPACES

The manoeuvring area adjacent to a single garage are to also have a minimum dimension of 7 metres measured from the front door of the garage. The manoeuvring area can be reduced to 6.7 metres for a double garage or for carports.

15.6 PARKING AREA CONSTRUCTION

Car-parking areas and associated driveways and manoeuvring areas are to be constructed in accordance with Council's Development and Subdivision Code.

PO 15.6-1 PLANNING OUTCOMES – OFF-STREET CAR PARKING

1 Adequate off-street car parking is provided in accordance with the Table or, alternatively, according to an assessment that demonstrates peak-parking demand based on recognised research.
2 Car-parking areas are designed according to Australian Standard.
3 Car-park areas include adequate lighting and landscaping (preferably deciduous shade trees), which provides for the personal security of users.
4 Bicycle-parking facilities are provided according to the relevant Australian Standard.
5 Facilities for loading and unloading of commercial vehicles are .provided according to the relevant Australian Standard.

RELATED INFORMATION – CAR PARKING

1 Roads and Traffic Authority, NSW. 1993. *Guide to Traffic Generating Developments*, RTA, NSW
2 Standards Australia 1993. *Parking facilities: Off Street Car Parking* AS 2890.1-1993
3 Standards Australia 1989. *Off street parking – Commercial vehicle facilities* AS 2890.2-1989
4 Standards Australia 1993 *Parking facilities – Bicycle parking facilities* AS 2890.3-1993
5 Standards Australia 1993 *Parking facilities – On-street parking* AS 2890.5-1993
6 State Environmental Planning Policy 11 – Traffic Generating Developments

(next page is Page 16.1)