
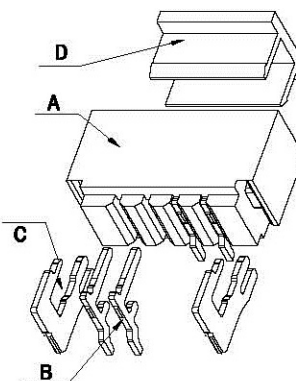





REV.	ECN NO OR DESCRIPTION	REVISED	DATE

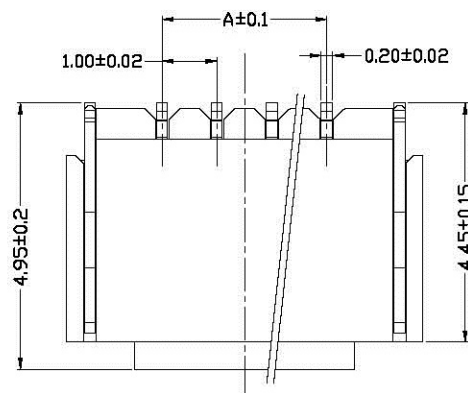


SPECIFICATION

- 1 Contact resistance: $\leq 20\text{m}\Omega$
- 2 Insulation resistance: $\geq 100\text{M}\Omega$
- 3 Rated voltage: 50 V AC DC
- 4 Rated current: 1.0 A AC DC
- 5 Withstand Voltage: 500V AC/minute
- 6 Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

吸盘装于产品中心

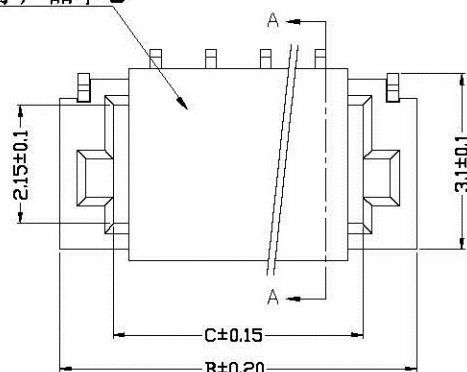


SECTION A-A

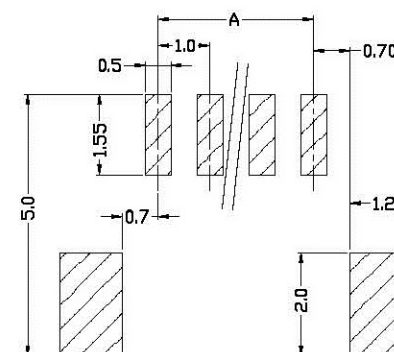

D	Cap	1	LCP (UL94V-0)	Beige
C	Solder Tab	2	Phosphor Bronze	Tin-plated
B	Contacts	2~20	Phosphor Bronze	Tin-plated
A	Insulator	1	LCP (UL94V-0)	Beige
NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR

Circuit	Dimensions (mm)			Circuit	Dimensions (mm)		
	A	B	C		A	B	C
02	1.00	4.00	2.50	10	9.00	12.00	10.50
03	2.00	5.00	3.50	11	10.00	13.00	11.50
04	3.00	6.00	4.50	12	11.00	14.00	12.50
05	4.00	7.00	5.50	13	12.00	15.00	13.50
06	5.00	8.00	6.50	14	13.00	16.00	14.50
07	6.00	9.00	7.50	15	14.00	17.00	15.50
08	7.00	10.00	8.50	16	15.00	18.00	16.50
09	8.00	11.00	9.50	20	19.00	22.00	20.50

TOLERANCE(mm)		DRAWER		<div>Astron®</div> <div>SHENZHEN ASTRON ELECTRONIC CO.,Ltd</div>
X.	± 0.30	Sunny		
.X	± 0.20	CHECK		
.XX	± 0.10	Tenge		
.XXX	± 0.05	APP'D		
.X'	± 0.5'	Wisely		NAME
		PRODUCT SPEC.		JST1.0 立贴-NP
		—		DRAW NO. A1001-WV-**-NP
UNITS : mm [inch]				
SCALE	SIZE	SHEET	REV.	
NONE	A4	1 OF 1	A	

Astron®

SHENZHEN ASTRON ELECTRONIC CO.,Ltd