



Pb
Process
Capable


RoHS
Compliant
2002/95/Ec

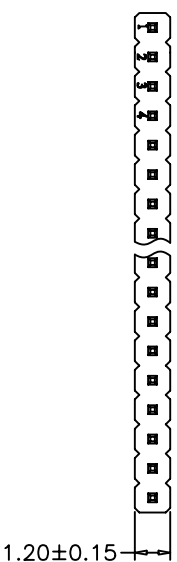


NOTES:

Current Rating:0.75AMP
Contact Resistance:30mΩ max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ min
Operation Temperature:-40℃ to +105℃

Contact Material: Brass
 Contact plating: Au or Sn Over Ni
 Insulator Material: PA6T+30%GF(UL94V-0)

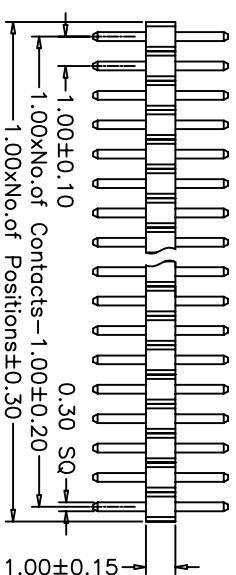

Ordering Information

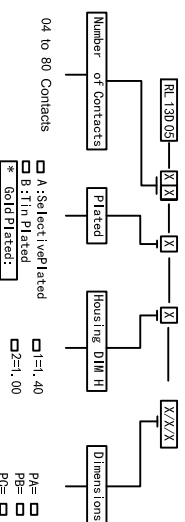



<input type="checkbox"/> A: Select/rev/late	<input type="checkbox"/> 1=1, 40	<input type="checkbox"/> PE=
<input type="checkbox"/> B: 11m Plated	<input type="checkbox"/> 2=1, 00	<input type="checkbox"/> PB=
<input checked="" type="checkbox"/> * Gold Plated:		<input type="checkbox"/> PP=
<input type="checkbox"/> C: 30d Flash		<input type="checkbox"/> Please describe
<input type="checkbox"/> D: 30d 2u"		<input type="checkbox"/> the length with
<input type="checkbox"/> E: 30d 3u"		<input type="checkbox"/> PA/PB/PC
<input type="checkbox"/> F: 30d 10u"		
<input type="checkbox"/> G: 30d 15u"		
<input type="checkbox"/> H: 30d 30u"		

Dimension antitheses list		
ITEM	A	B
Standard	1.80	1.80
Alternate		

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE \pm 0.05)



TOLERANCE(mm)		DRAWER	 SHENZHEN ASTRON ELECTRONIC CO.,Ltd
.0=±0.25		CHECK	
.00=±0.15		<i>George</i>	
.000=±0.05		APP'D	
.0000=±.		<i>Widely</i>	
ANG.=±3°		PRODUCT SPEC.	NAME PIN HEADER PH. 0mm SINGLE ROW SMT H=1.0
			DRAW NO.
UNITS : mm [inch]			
SCALE	SIZE	SHEET	REV.
NONE	A4	1 OF 1	A