

MICRO-PERFORATED ACOUSTIC WOOD PANEL

rWood Micro

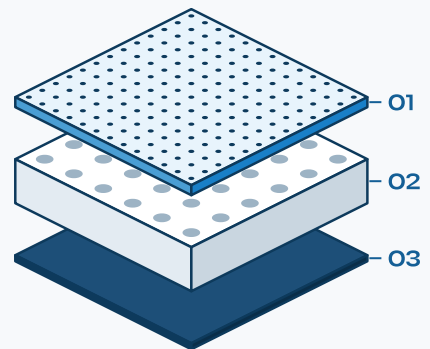
**Invisible perforation,
exceptional acoustics.**

Micro-perforations from 0.5 mm in the A-grade veneer open onto sound chambers in the fire-retardant MDF core, backed by an acoustic fleece.

From a normal viewing distance the holes disappear into the wood.

Made to measure for walls and ceilings, up to 3 050 × 1 220 mm, in 10 and 19 mm. Eight stock veneers, any veneer and finish to order.

BUILD-UP

**01 Micro-perforated veneer**

A-grade, holes from Ø 0.5 mm

02 FR MDF core

With sound chambers

03 Acoustic fleece

Black or white

Behind the panel: cavity, optional mineral wool.

10 · 19

mm thickness

0.90

α_w, absorption class A

B-s1,d0


reaction to fire, FR MDF core

4

perforation densities, Ø 0.5 to 2 mm

PERFORATION

Four perforation densities

**Nano**


Ø 0.5 mm · 2.5 % open

Virtually invisible perforations

**Micro S**


Ø 1.0 mm · 5.2 % open

Subtle micro-perforations

**Micro M**

Ø 1.5 mm · 8.4 % open

Balanced perforation pattern

**Micro L**

Ø 2.0 mm · 10.6 % open

Maximum absorption pattern

Drawings about 2:1, hole size and open area as stated per density.

ACOUSTICS

Sound absorption

Sound enters through the micro-perforations and is absorbed in the sound chambers of the core and in the fleece behind it. How much the panel absorbs depends on the perforation density and on what sits behind it.

Sound absorption	
αw	0.90
Absorption class	A
With 50 mm mineral wool	αw up to 1.00
Test standard	EN ISO 354 · EN ISO 11654

Behind the panel

A backing absorber raises the absorption: acoustic felt, an rPET panel or mineral wool in the cavity. With 50 mm mineral wool the panel reaches αw 1.00.

αw and absorption class to EN ISO 11654. Figures depend on the perforation density, the cavity depth and the absorber behind the panel.

TECHNICAL DATA

Panel, fire and emissions

Panel	
Sizes	100–3 050 × 100–1 220 mm
Thickness	10 · 19 mm
Core	FR MDF with sound chambers
Acoustic fleece	Black or white
Made in	Poland (Częstochowa)

Fire and emissions	
Reaction to fire	B–s1,d0, FR MDF core
Fire standard	EN 13501–1
Wood sourcing	FSC®–certified
Formaldehyde	E1
Environment	Interior, dry areas

INSTALLATION

Concealed clip system for walls and ceilings

01 Subframe

Aluminium rails on the wall or ceiling structure.

02 Insulation

Optional mineral wool for higher absorption.

03 Panels


Concealed clips, tool-free mounting.

04 Result


Invisible fixings and a continuous wood surface.

VENEERS


Eight stock veneers, any veneer to order

**Beech White Ash**


Europe
Straight to interlocked

**Birch Rotary**


Scandinavia
Subtle fine grain

**Silk Oak**


Europe
Fine straight grain

**Straw Oak**


Europe
Cathedral grain

**Umber Oak**


Europe
Pronounced grain

**American Walnut**

North America
Straight to wavy

**Smoked Oak**

Europe
Deep cathedral grain

**Tobacco Walnut**

North America
Rich flowing grain

Made to order

Beyond the eight stock veneers, we make any veneer species, stain colour and finish.

Finish

UV-cured lacquer from super matt to high gloss, natural or pigmented.

A natural material

Real wood varies in colour and grain. Ask for samples before you specify.

ORDERING

Lead times and samples

Lead time	
Stock veneers	3–4 weeks
Non-stock and custom	6–8 weeks
Made to measure	From your drawings

Supply	
Samples	Free veneer samples
Sizes	Up to 3 050 × 1 220 mm
Prices	On request

End of life

Re-Sound takes panels back free of charge at end of life in Belgium, the Netherlands, France, Germany and Luxembourg.

Samples and quotes

info@re-sound.be · +32 3 284 68 18
Showroom: Gentseweg 309 A3,
9120 Beveren-Waas, Belgium

Data reflects our current knowledge and may change without notice.