

GROOVED ACOUSTIC WOOD PANEL

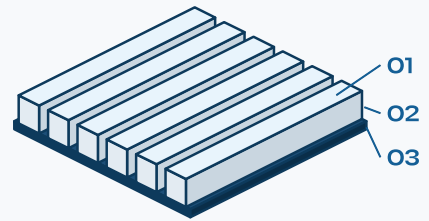
rWood Groove

Natural beauty, perfect acoustics.

A-grade oak or walnut veneer on an MDF core, precision-grooved into vertical lamellas on a 3 mm recycled-PET felt. The open grooves lead sound into the felt; planks join with a concealed tongue-and-groove.

Planks of 300 mm wide, 2 400 or 2 780 mm long, in 10 and 19 mm, for walls and ceilings. Four lamella patterns, any veneer and finish to order.

BUILD-UP

**01 Veneer face**

A-grade oak or walnut

02 MDF lamellas

Standard, MR or FR core

03 Recycled-PET felt

3 mm, black or grey

Fixed on battens or glued to the substrate.

10 · 19

mm thickness

0.90

aw, absorption class A

B-s1,d0


reaction to fire, FR MDF core

4


lamella patterns on 300 mm planks

PATTERNS

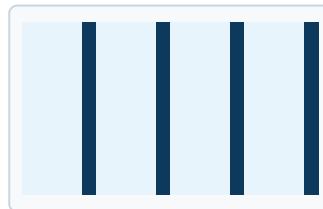
Four lamella patterns

**Original****6 × 34 mm**

Classic 6-lamella design

**Mixed****6 × 50 / 30 / 22 mm**

Dynamic mixed widths

**4-Lamella****4 × 59 mm**

Bold wide strips

**3-Lamella****3 × 84 mm**

Statement wide panels

Plank width 300 mm, groove width 15 mm, drawings about 1:8. Standard size 19 × 300 × 2 400 or 2 780 mm. Weight per plank approx. 6.4–8.3 kg. Tolerances: thickness ± 0.2 mm, weight ± 10 %.

ACOUSTICS

Sound absorption

The open grooves lead sound into the recycled-PET felt behind the lamellas, which cuts reverberation and improves speech clarity.

Sound absorption	
αw	0.90
Absorption class	A
Test standard	EN ISO 354 · EN ISO 11654

Behind the plank

Mounted on battens, the cavity can take an extra absorber: acoustic felt, an rPET panel or mineral wool.

αw and absorption class to EN ISO 11654. Octave-band values follow with the new test series.

TECHNICAL DATA

Plank, fire and emissions

Plank	
Width	300 mm
Length	2 400 · 2 780 mm
Thickness	10 · 19 mm
Groove	15 mm wide, 7 · 15 mm deep
Felt	Recycled PET, 3 mm, black or grey
Connection	Concealed tongue-and-groove
Environment	Interior, dry areas

Fire (EN 13501-1) and emissions	
Standard MDF core	D-s2,d2
FR MDF core	B-s1,d0
Felt backing	B-s1,d0
Formaldehyde	E1
Wood sourcing	FSC®-certified, C191539
Felt	OEKO-TEX® Standard 100
Environmental	EPD to ISO 14025 · EN 15804
Made in	Poland (Częstochowa)

INSTALLATION

Tongue-and-groove, on battens or glued

01 Surface

Battens or adhesive on a clean, dry, level surface.

02 First plank

Start from a corner and check the level.

03 Connect

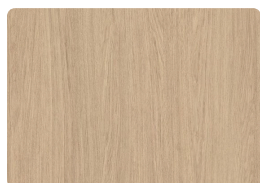
Slide the tongue into the groove for a seamless joint.

04 Finish

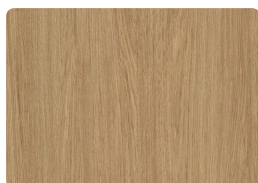
Close the edges with end mouldings.

VENEERS AND FINISHES

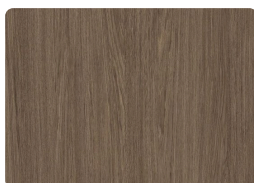
Oak and walnut, any veneer to order

**Silk Oak**

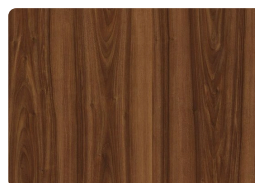
Soft greige tone

**Straw Oak**

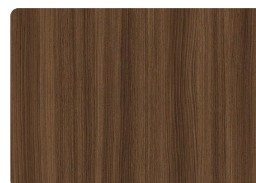
Pale, warm-neutral oak

**Umber Oak**

Smoked grey-brown

**Walnut**

Rich, figured brown

**Tobacco Walnut**

Warm mid-brown

Finish	
Finish	Penetrating oil or lacquer
Oak oil colours	Natural, White, Clear, Brown, Dark Brown, Black
Walnut	Natural, oiled
Felt colours	Black or grey

Options	
Core	Standard, MR or FR MDF
Surface	Oiled or painted, untreated on request
Made to order	Any veneer and finish
Accessories	End mouldings, corner profiles, battens, touch-up kit

All twelve rWood veneers are shown in the rWood colour and finish guide. Real wood varies in colour and grain: ask for samples before you specify.

ORDERING

Lead time and samples

Order	
Lead time	Subject to stock, confirmed on order
Minimum order	On request

Supply	
Samples	Free veneer samples
Prices	On request

End of life

Re-Sound takes panels back free of charge at end of life in Belgium, the Netherlands, France, Germany and Luxembourg.

Samples and quotes

info@re-sound.be · +32 3 284 68 18
Showroom: Gentseweg 309 A3,
9120 Beveren-Waas, Belgium

Data reflects our current knowledge and may change without notice.