

PERFORATED ACOUSTIC WOOD PANEL


rWood Perf

**Precision perforations,
maximum absorption.**

Round perforations drilled through the veneered, fire-retardant MDF panel let sound pass into the acoustic fleece and the absorber behind it. Four patterns, from a discreet 5 mm hole to a double 8 mm pattern with 24 % open area.

Made to measure for walls and ceilings, up to 3 050 × 1 220 mm, in 10 and 19 mm. Eight stock veneers, any veneer and finish to order.

BUILD-UP

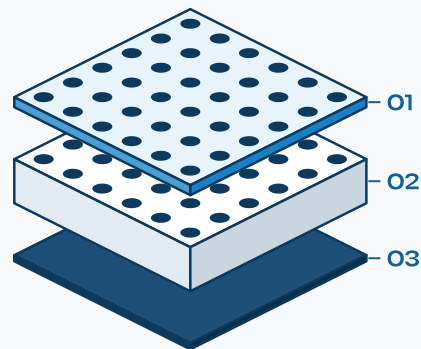**01 Perforated veneer**

A-grade, drilled Ø 5 to 10 mm

02 FR MDF core

Light or dark, drilled through

03 Acoustic fleece

Black or white

Behind the panel: cavity with mineral wool.

10 · 19

mm thickness

0.85

aw with pattern PD8, 0.35
to 0.85 by pattern

B-s1,d0


reaction to fire, FR MDF
core

4

perforation patterns,
Ø 5 to 10 mm


PERFORATION

Four perforation patterns

**PD8**


2 × Ø 8 mm · 24 % open

Double pattern, maximum
absorption

**PH10**


Ø 10 mm · 18 % open

High absorption, bold
perforations

**PH8**

Ø 8 mm · 12 % open

Balanced look and
performance

**PH5**

Ø 5 mm · 5 % open

Discreet pattern, subtle
surface

Drawings about 1:2, hole size and open area as stated per pattern.

ACOUSTICS

Sound absorption

Sound passes through the perforations into the acoustic fleece and the cavity behind the panel. The larger the open area, the higher the absorption.

Sound absorption	
αw, by pattern	0.35 to 0.85
With 50 mm mineral wool	αw up to 1.00
NRC	0.90
Test standard	EN ISO 354 · EN ISO 11654
Mounting in test	Cavity with mineral wool backing

Pattern	Open area	αw		Class		
PD8	24 %	0.85		B		
PH10	18 %	0.75		C		
PH8	12 %	0.55		D		
PH5	5 %	0.35		D		
Hz	125	250	500	1k	2k	4k
as PD8	0.35	0.70	0.95	1.00	0.95	0.85

as per octave band: pattern PD8 with cavity, indicative. Figures depend on the pattern, the cavity depth and the absorber behind the panel.

TECHNICAL DATA

Panel, fire and emissions

Panel	
Sizes	100–3 050 × 100–1 220 mm
Thickness	10 · 19 mm
Core	FR MDF, light or dark
Acoustic fleece	Black or white
Made in	Poland (Częstochowa)

Fire and emissions	
Reaction to fire	B-s1,d0, FR MDF core
Fire standard	EN 13501-1
Wood sourcing	FSC®-certified
Formaldehyde	E1
Environment	Interior, dry areas

INSTALLATION

Concealed clip system for walls and ceilings

01 Subframe

Metal rails on the wall or ceiling structure.

02 Insulation

Mineral wool in the cavity for best absorption.

03 Panels


Concealed clips, tool-free, zero-gap mounting.

04 Result


Patterns aligned from panel to panel.

veneers

Eight stock veneers, any veneer to order



Beech White Ash
Europe
Straight to interlocked




Birch Rotary
Scandinavia
Subtle fine grain




Silk Oak
Europe
Fine straight grain




Straw Oak
Europe
Cathedral grain




Umber Oak
Europe
Pronounced grain



American Walnut
North America
Straight to wavy



Smoked Oak
Europe
Deep cathedral grain



Tobacco Walnut
North America
Rich flowing grain

Made to order

Beyond the eight stock veneers, we make any veneer species, stain colour and finish.

Finish

UV-cured lacquer from super matt to high gloss, natural or pigmented.

A natural material

Real wood varies in colour and grain. Ask for samples before you specify.

ORDERING

Lead times and samples

Lead time	
Stock veneers	3–4 weeks
Non-stock and custom	6–8 weeks
Made to measure	From your drawings

Supply	
Samples	Free veneer samples
Sizes	Up to 3 050 × 1 220 mm
Prices	On request

End of life

Re-Sound takes panels back free of charge at end of life in Belgium, the Netherlands, France, Germany and Luxembourg.

Samples and quotes

info@re-sound.be · +32 3 284 68 18
Showroom: Gentseweg 309 A3,
9120 Beveren-Waas, Belgium

Data reflects our current knowledge and may change without notice.