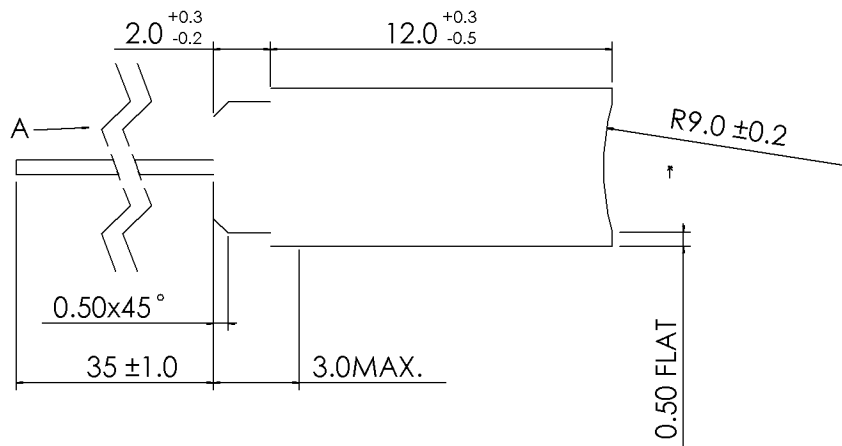
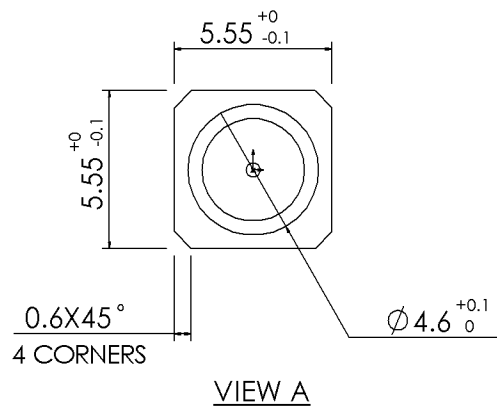


SPECIFICATION :

VOLTAGE	220V 50Hz	120V 60Hz
CURRENT	1A	3A
SPEED	30000 RPM	
LIFE REG"D	1500	
MATL GRADE	225A05	

SHUNT WIRE CONSISTS OF 34X3 STRAND OF Ø0.05 OXYGEN FREE COPPER WIRE TWISTED (NOTE: COPPER WIRE MUST WITHSTAND A 19.6 RADIAL PULL FORCE WITHOUT LOOSE FROM BLOCK)

ALL DIMENSIONS ARE IN MILLIMETRES

DO NOT SCALE DRAWING

B	UPDATED ASE I02020 (A02/0368)		C.H.N.	02/05/24
A	FIRST ISSUED WAS 01W5007-D01-01A (A02/0082)		C.H.N.	02/01/29
ALT.	REF.	DESCRIPTION	BY	DATE
MATERIAL		FINISH	TOLERANCES	
SEE SPECIFICATION MATERIAL			1 DEC. PLACE ± 0.2 2 DEC. PLACES ± 0.10 3 DEC. PLACES ± 0.05	
Critical Dim.		Control Dim.	ANGULAR ± 2°	
TITLE			SCALE	DATE
CARBON BRUSH			4:1	2003/01/23
JOHNSON ELECTRIC ENGINEERING LTD. A JOHNSON ELECTRIC GROUP COMPANY. JOHNSON BUILDING, TAI PO, HONGKONG.			DWN. BY	YJ CHEN
			CHK. BY	
			APP. BY	
DWG. NO.			Sheet 1 of 1	
CPUN54D0122				

JOHNSON ELECTRIC GROUP OF COMPANIES ("JOHNSON ELECTRIC")
This document is the Property of Johnson Electric and the
information therein contained is confidential. Unauthorised
reproduction or other use thereof, whether directly or
indirectly, is prohibited. All rights reserved.
Products made or otherwise derived directly or indirectly
from this document are proprietary to Johnson Electric.
© Copyright Johnson Electric S.A. 2002. All rights reserved.