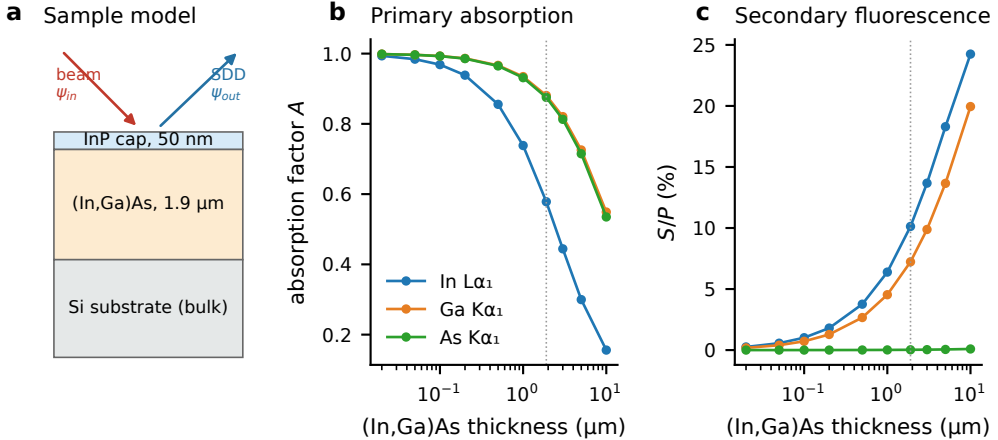
a
Sample model
beam
ψ_{in}
SDD
ψ_{out}
InP cap, 50 nm
(In,Ga)As, 1.9 µm
Si substrate (bulk)
b
Primary absorption
absorption factor A
1.0
0.8
0.6
0.4
0.2
In Lα₁
Ga Kα₁
As Kα₁
10^{-1}
10^{0}
10^{1}
(In,Ga)As thickness (µm)
c
Secondary fluorescence
S/P (%)
25
20
15
10
5
0
10^{-1}
10^{0}
10^{1}
(In,Ga)As thickness (µm)