




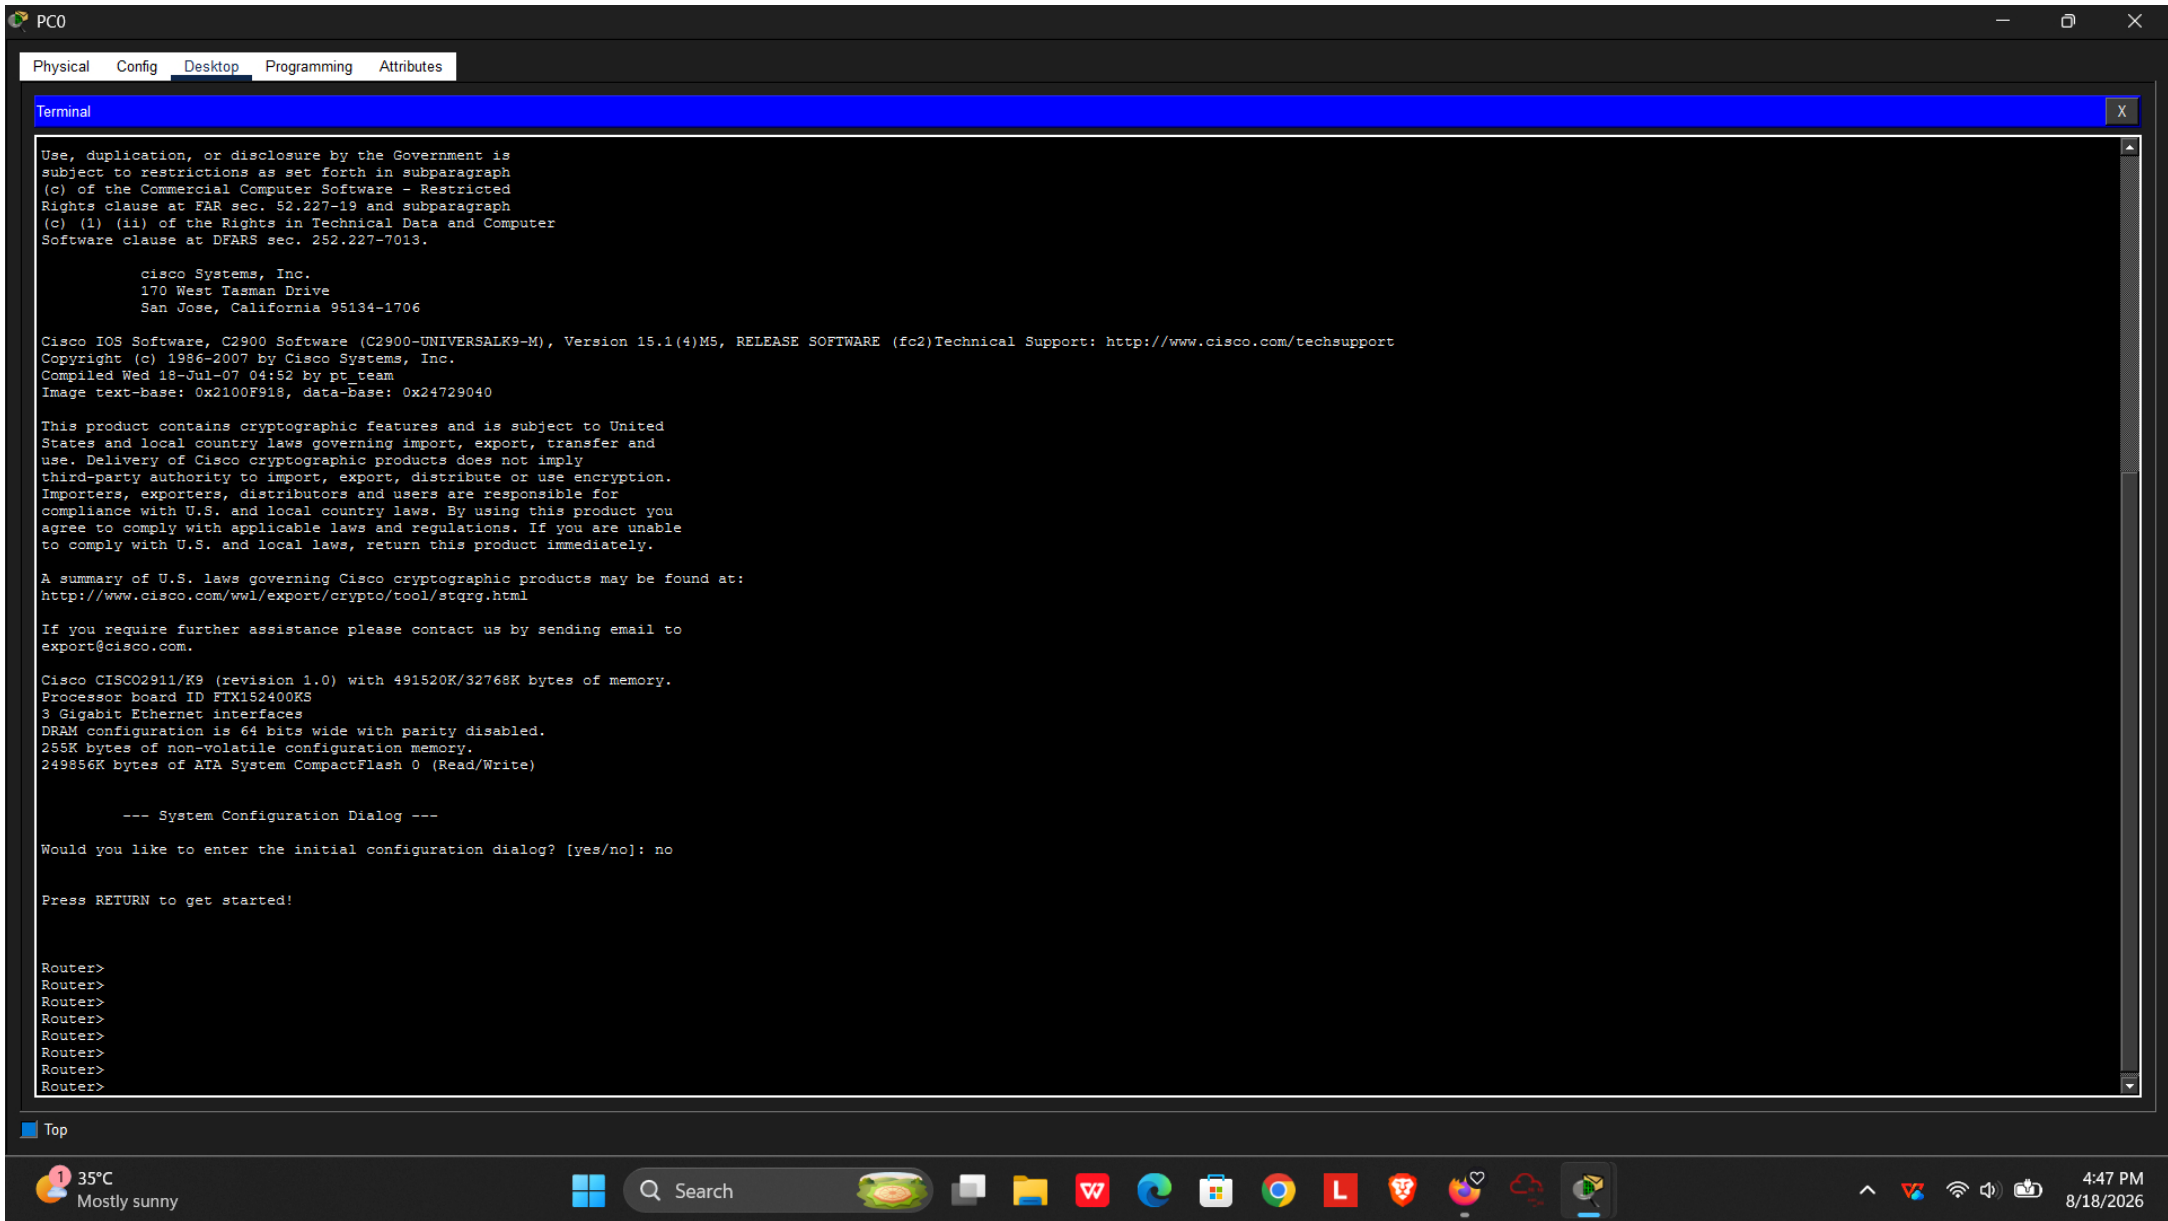

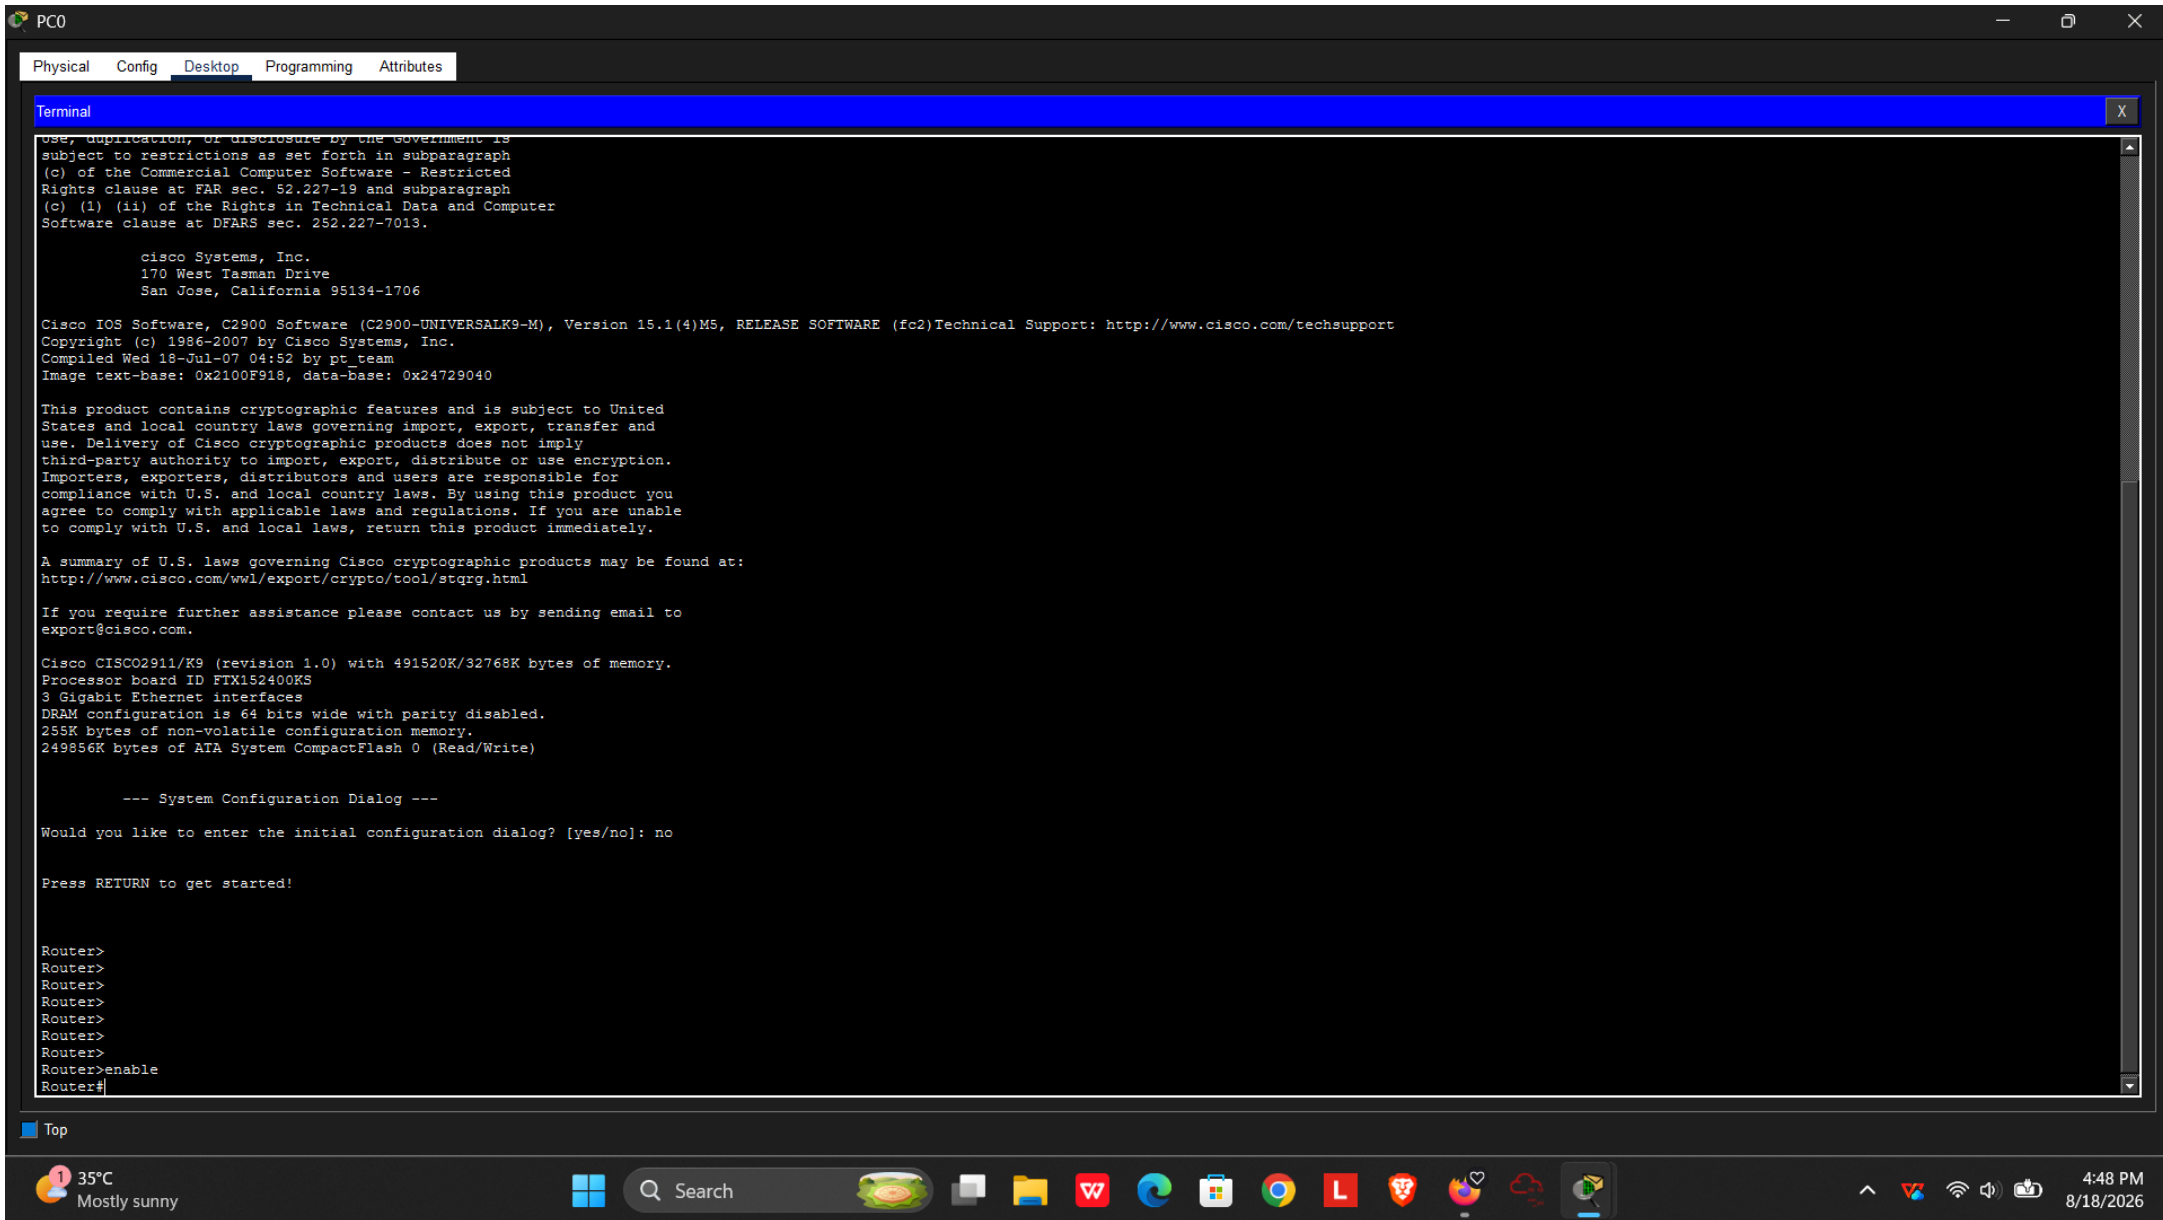

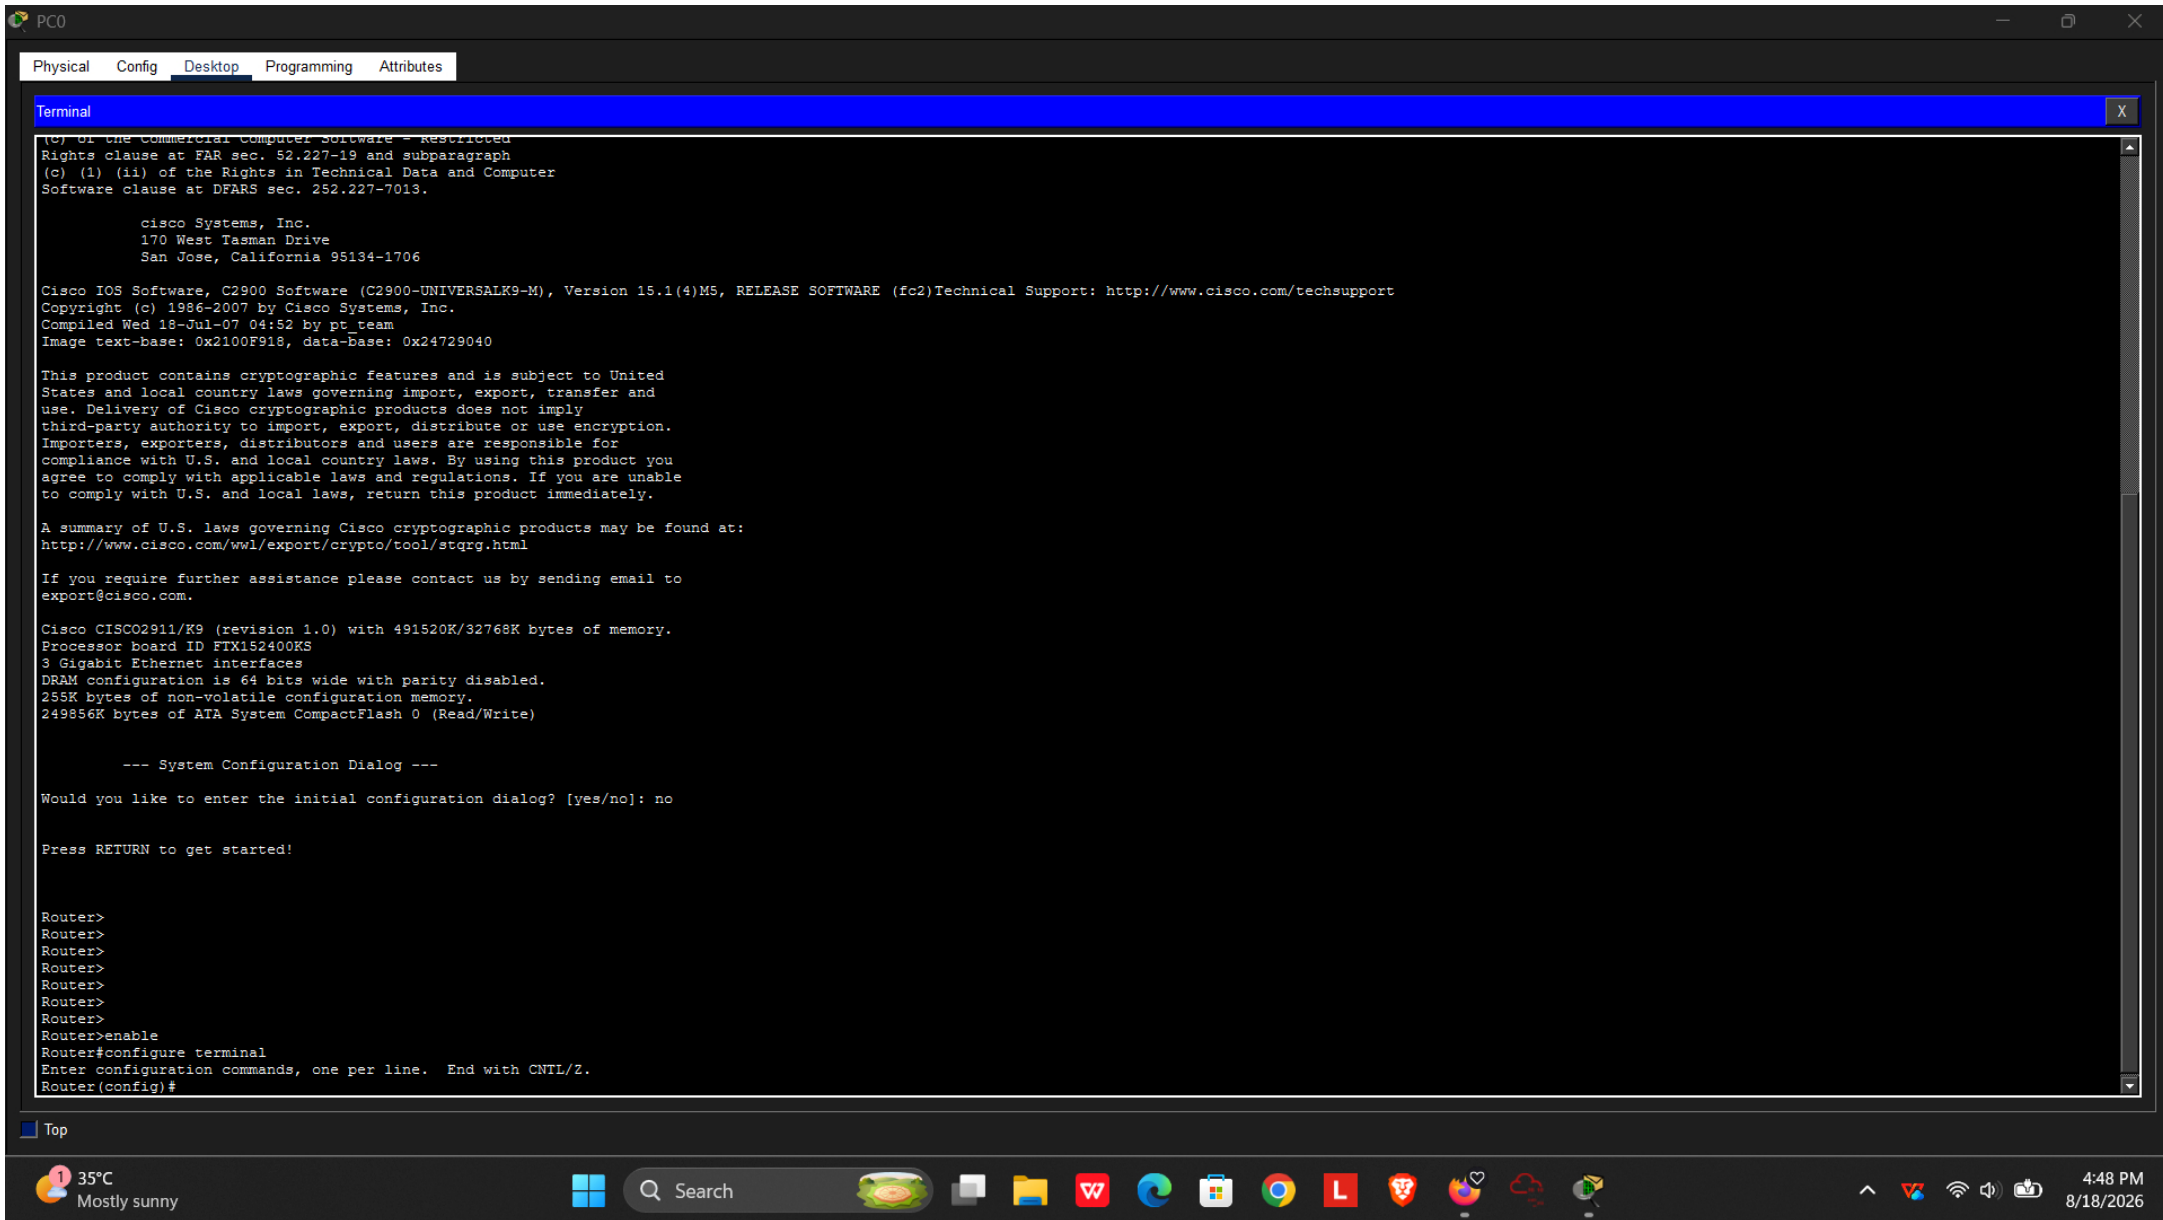

PC0

Physical Config Desktop Programming Attributes

Terminal

```
Router#enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#show ip interface brief
^
% Invalid input detected at '^' marker.

Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip interface brief
Interface      IP-Address      OK? Method Status      Protocol
GigabitEthernet0/0  unassigned      YES unset    administratively down down
GigabitEthernet0/1  unassigned      YES unset    administratively down down
GigabitEthernet0/2  unassigned      YES unset    administratively down down
Vlan1          unassigned      YES unset    administratively down down
Router#configure terminal
^
% Invalid input detected at '^' marker.

Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface GigabitEthernet0/0
Router(config-if)#ip address 50.0.0.1 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up

Router(config-if)#exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#username john password john
Router(config)#line console 0
Router(config-line)#login local
Router(config-line)#exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#disable
Router>enable
Router#show ip interface brief
Interface      IP-Address      OK? Method Status      Protocol
GigabitEthernet0/0  50.0.0.1        YES manual up          up
GigabitEthernet0/1  unassigned      YES unset    administratively down down
GigabitEthernet0/2  unassigned      YES unset    administratively down down
Vlan1          unassigned      YES unset    administratively down down
Router#
```

Top

Rain warning
In effect

Search

4:59 PM
8/18/2026

PC0

Physical Config Desktop Programming Attributes

Terminal

```
GigabitEthernet0/2 unassigned YES unset administratively down down
Vlan1 unassigned YES unset administratively down down
Router#configure terminal
^
% Invalid input detected at '^' marker.

Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface GigabitEthernet0/0
Router(config-if)#ip address 50.0.0.1 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up

Router(config-if)#exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#username john password john
Router(config)#line console 0
Router(config-line)#login local
Router(config-line)#exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#disable
Router>enable
Router#show ip interface brief
Interface IP-Address OK? Method Status Protocol
GigabitEthernet0/0 50.0.0.1 YES manual up up
GigabitEthernet0/1 unassigned YES unset administratively down down
GigabitEthernet0/2 unassigned YES unset administratively down down
Vlan1 unassigned YES unset administratively down down
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#
Router(config)#line console 0
Router(config-line)#login local
Router(config-line)#exit
Router(config)#line vty 0 4
Router(config-line)#password cisco
Router(config-line)#login
Router(config-line)#exit
Router(config)#ping
^
% Invalid input detected at '^' marker.

Router(config)#
```

Top

34°C Partly sunny

Search

5:04 PM 8/18/2026