

# **CHAPTER 1**

## **INTRODUCTION**

### **1.1 Background**

Computer Numerical control (usually called CNC) is the computerized control of machining apparatuses (drills, drilling devices, machines) and 3D printers by methods for a computer. A CNC machine forms a bit of material (metal, plastic, wood, earthenware, or composite) to meet particulars by adhering to a coded customized guidance and without a manual administrator.

CNC machine is a mechanized flexibility device and regularly a mechanized flexibility stage, which are both constrained by a PC, as per explicit information guidelines. Directions are conveyed to a CNC machine as a successive program of machine control guidelines, for example, G-code and afterward executed. The program can be composed by an individual or, undeniably more regularly, created by graphical PC helped plan (CAD) programming. On account of 3D printers, the part to be printed is "cut", before the directions (or the program) are created. 3D printers likewise use G-Code.

CNC is a tremendous improvement over non-automated machining that must be physically controlled (e.g., utilizing gadgets, for example, hand wheels or switches) or precisely constrained by pre-created design guides (cams). In present day CNC frameworks, the structure of a mechanical part and its assembling program is exceptionally computerized. The mandates are changed (by "post processor" programming) into the particular orders vital for a specific machine to deliver the segment, and afterward are stacked into the CNC machine.

### **1.2 COMPUTER NUMERICAL CONTROL (CNC) MACHINE**

The term CNC means 'computer numerical control', and the CNC machining definition is that it is a subtractive assembling [1]process which ordinarily utilizes automated controls and machine instruments to expel layers of material from a stock piece known as the clear or work piece and creates a hand crafted part. This procedure is reasonable for a wide scope of materials, including metals, plastics, wood, glass, froth, and composites, and discovers application in an assortment of enterprises, for example, enormous CNC machining and CNC machining aviation parts. When talking regarding the machine itself, the CNC machine definition is that it speaks to the real programmable machine that is able to do independently playing out the activities of CNC machining. Note the differentiation between the procedures (CNC machining definition) versus the machine (CNC machine definition). Subtractive assembling forms, for example, CNC machining, are frequently introduced as opposed to added substance fabricating forms, for example, 3D printing, or developmental assembling forms, for example, fluid infusion shaping. While subtractive procedures expel layers of

material from the work piece to deliver custom shapes and structures, added substance forms amass layers of material to create the ideal structure and developmental procedures misshape and dislodge stock material into the ideal shape. The mechanized idea of CNC machining empowers the creation of high exactness and high precision, straightforward parts and the cost-viability while satisfying erratic and medium-volume creation runs.

### **1.2.1 Overview of CNC Machining Process**

Developing from the numerical control (NC) machining process which used punched tape cards[2], CNC machining is an assembling procedure which uses automated controls to work and control machine and slicing apparatuses to shape stock material e.g., metal, plastic, wood, froth, composite, and so on into custom parts and structures. While the CNC machining process offers different abilities and tasks, the key standards of the procedure remain to a great extent the equivalent all through every one of them.

The basic CNC machining process includes the following stages:

- ✓ Designing the CAD model
- ✓ Converting the CAD file to a CNC program
- ✓ Preparing the CNC machine
- ✓ Executing the machining operation

### **1.2.2 CAD File Conversion**

The arranged CAD configuration record goes through a program, regularly computer-aided manufacturing (CAM) programming, to extricate the part geometry and creates the advanced programming code which will control the CNC machine and control the tooling to deliver the hand crafted part.

CNC machines utilized a few programming dialects, including G-code and M-code. The most notable of the CNC programming dialects, general or geometric code, alluded to as G-code, controls when, where, and how the machine devices move

e.g., when to turn on or off, how quick to venture out to a specific area, what ways to take, and so on over the work piece. Incidental capacity code, alluded to as M-code, controls the assistant elements of the machine, for example, computerizing the evacuation and substitution of the machine spread toward the beginning and end of creation, individually.

### **1.2.3 Machine Setup**

Before the administrator runs the CNC program, they should set up the CNC machine for activity. These arrangements incorporate fastening the work piece straightforwardly into the machine, onto hardware shafts, or into machine tight clamps or comparative work holding gadgets, and appending the required tooling, for example, boring apparatus and end plants, to the correct machine parts. When the machine is completely set up, the administrator can run the CNC program.

### **1.2.4 Machining Operation Execution**

The CNC program goes about as guidelines for the CNC machine, it submits machine orders directing the tooling's activities and developments to the machine's incorporated computer, which works and controls the machine tooling. Starting the program prompts the CNC machine to start the CNC machining process, and the program directs the machine all through the procedure as it executes the fundamental machine activities to create a specially crafted part or item.

CNC machining procedures can be acted in-house if the organization puts resources into acquiring and keeping up their own CNC gear or out-sourced to commit CNC machining specialist co-ops.

### **1.2.5 Types of CNC Machining Operations**

CNC machining is an assembling procedure appropriate for a wide assortment of businesses, including automotive[2], aviation, development, and agribusiness, and ready to create a scope of items, for example, car outlines, careful hardware, plane motors, and hand and digging tools. The procedure envelops a few diverse PC controlled machining activities including mechanical, substance, electrical, and warm procedures which expel the essential material from the work piece to create a

specially crafted part or item. While synthetic, electrical, and warm machining forms are shrouded in a later segment, this area investigates probably the most widely recognized mechanical CNC machining tasks including:

- ✓ Drilling
- ✓ Engraving
- ✓ Milling
- ✓ Turning

#### **1.2.5.1 CNC Drilling**

Drilling is a machining procedure which utilizes multi-point boring tools to deliver barrel shaped gaps in the work piece. In CNC penetrating, regularly the CNC machine takes care of the pivoting bore oppositely to the plane of the work piece's surface, which delivers vertically-adjusted gaps to breadths equivalent to the distance across of the bore utilized for the boring activity. In any case, rakish penetrating activities can likewise be performed using particular machine arrangements and work holding gadgets. Operational capacities of the penetrating procedure incorporate counter exhausting, countersinking, reaming and tapping.

#### **1.2.5.2 CNC Milling**

Milling is the most well-known type of machining, a material evacuation process, which can make an assortment of highlights on a section by removing the undesirable material. The processing procedure requires a processing machine, work piece, apparatus, and shaper. The work piece is a bit of pre-molded material that is made sure about to the apparatus, which itself is connected to a stage inside the processing machine. The shaper is a cutting instrument with sharp teeth, which is additionally made sure about in the processing machine and pivots at high speeds. By taking care of the workpiece into the turning shaper, material is removed from this work piece as little chips to make the ideal shape. Processing is commonly used to deliver parts that are not pivotally symmetric and have numerous highlights, for example, gaps, spaces, pockets, and even three-dimensional surface shapes. Parts that are manufactured totally through processing frequently incorporate segments that are utilized in restricted amounts, maybe for models, for example, specially crafted latches or sections. Another use of

this process is the creation of tooling for different procedures. For instance, three-dimensional molds are commonly processed. Processing is likewise ordinarily utilized as an optional procedure to include or refine highlights parts that were made utilizing an alternate procedure. Because of the high resistances and surface completes that processing can offer, it is perfect for adding exactness highlights to a section whose essential shape has just been framed. Processing is as essential as penetrating among fueled metal cutting procedures. Processing is adaptable for a fundamental machining process, but since the processing set up has such a large number of degrees of opportunity, processing is normally less exact than turning or hobbing except if particularly unbending fixturing is executed. For manual machining, processing is basic to manufacture any object that isn't pivotally symmetric. The following is shown the procedure at the cutting territory. A run of the mill section and-knee type manual plant is appeared. Such manual plants are normal in work shops that have practical experience in parts that are low volume and immediately manufactured. Such occupation shops are regularly named 'model shops' a result of the prototyping idea of the work. The pieces of the manual factory are isolated beneath. The knee goes all over the segment on direct routes in the section. The table can move in x and y on the knee, and the processing head can go all over. CNC Milling: Computer Numerical Control (CNC) Milling is the most widely recognized type of CNC. CNC plants can play out the elements of penetrating and regularly turning. CNC Mills are characterized by the quantity of tomahawks that they have. Tomahawks are marked as x and y for processing development, and z for vertical development, as appeared in this perspective on a manual plant table. ordinarily accepted to have four tomahawks: Table X, Table Y, Table Z and processing head Z. A five-hub CNC processing machine has an additional hub as a turning turn for the processing head. This permits additional adaptability for machining with the end factory at an edge regarding the table. A six-hub CNC processing machine would have another processing turn for the processing head, this time opposite to the fifth hub. CNC processing machines are generally modified utilizing a lot of orders known as G-codes. G-codes speak to explicit CNC capacities in alphanumeric arrangement.

### **1.2.5.3CNC Turning**

Turning Process Turning is a type of machining, a material evacuation process, which is utilized to make rotational parts by removing undesirable material. The turning procedure requires a turning machine or Gear Hobbling, work piece, apparatus, and cutting instrument. The work piece is a bit of pre-molded material that is made sure about to the apparatus, which

itself is joined to the turning machine, and permitted to pivot at high speeds. The shaper is normally a solitary point cutting apparatus that is additionally made sure about in the machine, albeit a few activities utilize multi-point instruments. The cutting apparatus takes care of into the turning work piece and removes material as little chips to make the ideal shape. Turning is utilized to deliver rotational, commonly pivot symmetric, parts that have numerous highlights, for example, gaps, grooves, strings, tightens, different distance across steps, and even formed surfaces. Parts that are created totally through turning frequently incorporate segments that are utilized in restricted amounts, maybe for models, for example, specially crafted shafts and latches. Turning is additionally regularly utilized as an auxiliary procedure to include or refine highlights parts that were produced Replacement of customary cutting machine with CNC Laser Cutting Machine 5 utilizing an alternate procedure. Because of the high resistances and surface completes that turning can offer, it is perfect for adding accuracy rotational highlights to a section whose fundamental shape has just been framed. Turning is the procedure whereby a solitary point slicing device is corresponding to the surface. It tends to be done physically, in a customary type of Gear Hobbing, which as often as possible requires consistent management by the administrator, or by utilizing a PC controlled and computerized CNC machine which doesn't. This kind of machine instrument is alluded to as having PC numerical control, also called CNC, and is normally utilized with numerous different sorts of machine apparatus other than the Turning machines. When turning, a bit of material (wood, metal, plastic, or stone) is pivoted and a cutting instrument is navigated along 2 tomahawks of movement to create exact measurements and profundities. Turning can be either outwardly of the chamber or within (otherwise called exhausting) to create cylindrical parts to different geometries. Albeit now very uncommon, early Gear Hobbling could even be utilized to create complex geometric figures, even the dispassionate solids; despite the fact that until the coming of CNC it had gotten abnormal to utilize one for this reason for the last seventy five percent of the twentieth century. It is said that the Lathes is simply the main machine device that can recreate itself. The turning forms are regularly done on a Turning machine, viewed as the most established machine devices, and can be of four unique sorts, for example, straight turning, tighten turning, profiling or outside scoring. Those kinds of turning procedures can deliver different states of materials, for example, straight, funnel shaped, bended, or scored work piece. When all is said in done, turning utilizes basic single-point cutting instruments. Each gathering of work piece materials has an ideal arrangement of instruments edges, which have been created as the years progressed. Turning explicit tasks include:

- ✓ Hard turning is a turning done on materials with Rockwell C hardness more

prominent than 45. It is normally performed after the work piece is heat treated. The procedure is proposed to supplant or restrict conventional hobbing activities. Hard turning, when applied for simply stock evacuation purposes, contends well with unpleasant hobbing. Be that as it may, when it is applied for completing where structure and measurement are basic, hobbing is predominant. Hobbing produces higher dimensional exactness of roundness and cylindricity. In addition, hard turning is fitting for parts requiring roundness precision of 0.5-12 microns, as well as surface roughness of 0.8–7.0 microns. It is utilized for gears, infusion siphon segments, water powered segments, among different applications.

- ✓ Facing is a piece of the turning procedure. It includes moving the slicing device at right points to the hub of pivot of the turning work piece. This can be performed by the activity of the cross-slide, in the event that one is fitted, as unmistakable from the longitudinal feed (turning). It is every now and again the primary activity acted in the creation of the work piece, and frequently the last-henceforth the expression "winding up".
- ✓ Parting process is utilized to make profound sections which will evacuate a finished or part total segment from its parent stock.
- ✓ Grooving resembles separating, then again, actually grooves are sliced to a particular profundity by a structure apparatus as opposed to cutting off a finished/part-total segment from the stock. Cutting can be performed on inner and outer surfaces, just as on the essence of the part (face scoring or trepanning).
- ✓ Machining of inner round and hollow structures (creating) a) by mounting work piece to the shaft through a hurl or faceplate b) by mounting work piece onto the cross slide and putting cutting device into the throw. This work is appropriate for castings that are to abnormal to mount in the face plate. On long bed machines huge work piece can be darted to an apparatus on the bed and a pole went between two carries on the work piece and these hauls can be exhausted out to estimate. A restricted application, yet one that is accessible to the talented turner/mechanic. In machining, drilling is the way toward expanding an opening that has just been bored (or cast), by methods for a solitary point cutting device (or of a drilling head containing a few such devices), for instance as in drilling a gun barrel. Drilling is utilized to accomplish more noteworthy exactness of the distance across of a gap, and can be utilized to cut a tightened opening. There are different sorts of

exhausting. The drilling bar might be bolstered on the two finishes (which possibly works if the current opening is a through gap), or it might be upheld toward one side. Line exhausting (line exhausting, line-exhausting) suggests the previous. Back drilling (back drilling, back-drilling) is the way toward coming to through a current opening and afterward drilling on the "back" side of the work piece (comparative with the machine headstock).

- ✓ Knurling is cutting of a serrated example onto the outside of a section to use as a hand hold utilizing a specific reason knurling instrument. Stringing both norm and non-standard screw strings can be turned on a hobbing machines utilizing a proper cutting apparatus. (Normally having a 60, or 55° nose edge) Either remotely, or inside a drag. [Generally alluded to as single point stringing. tapping of strung nuts and openings an) utilizing hand taps and tailstock focus b) utilizing a tapping gadget with a slipping hold to lessen danger of breakage of the tap stringing activities incorporate an) a wide range of outer and inward string structures utilizing a solitary point apparatus additionally tighten strings, twofold beginning strings, multi start strings, worms as utilized in worm wheel decrease boxes, lead screw with single or multi start strings. b) by the utilization of stringing boxes fitted with 4 structure devices, up to 2" breadth strings however it is conceivable to discover bigger boxes than this.

### **1.3 Numerical Control (NC) Machine**

The invention of numerical control has been due to the pioneering works of John T. Parsons in the year 1940, when he tried to generate a curve automatically by milling cutters by providing coordinate motions[4]. In the late 1940s Parsons conceived the method of using punched cards containing coordinate position system to control a machine tool. The machine directed to move in small increments and generate the desired finish. [5] In the year, 1948. Parons demonstrated this concept to the US Air Force, who sponsored the series of project at laboratories of Massachusetts Institute of Technology (MIT). After lots of research MIT was able to demonstrate first NC prototype in the year 1952 and in the next year they were able to prove the potential applications of the NC.



Numerical control (also computer numerical control, and commonly called CNC) is the automated control of machining tools (drills, boring tools, lathes) and 3D printers by means of a computer.

#### 1.4 Comparison between NC and CNC machine

<b>Sr. No.</b>	<b>NC Machine</b>	<b>CNC Machine</b>
1	In NC machine, the input methods are punched tape, punched card	In CNC machine the projects are taken care of legitimately into the computer by little console like our conventional console.
2	In NC machine the projects ought to be changed in punched card and afterward took care of to machine	In CNC machine we can change the program in computer
3	In NC machine operation parameters could not be changed	In CNC machine operation parameters can be changed.
4	There are no memory storage in NC machine	In CNC machine we can store programs using the memory storage in computer.
5	NC machine cost is less	CNC cost is more.
6	In NC machine, high skill operator required	In CNC machine, not required high skills.
7	In NC machine, it required more time to perform an operation	In CNC machine it requires less time to perform an operation.
8	NC machine's accuracy is less as compared to CNC machine	CNC machine's accuracy is more.

# **CHAPTER 2**

## **LITERATURE REVIEW**

### **2.1 Introduction**

The CNC represents Computer Numerical Control utilized in the assembling division that includes the utilization of PCs to control machine instruments. Devices that can be controlled as such incorporate machines, factories, switches and processors. By all accounts, it might appear as though a typical PC controls the machines, yet the PC's one of a kind programming and control reassurance are what truly separates the framework for use in CNC machining. The general objective of this part were right off the bat to portray the work completed by the different researchers worried to CNC machine, the impacts of different boundaries of CNC machine. This part gives us brief audit of the work did by different researchers in the field of CNC machine.

### **2.2 Effects of Various Parameters on the Performance of CNC Machine**

Tavaeva A.F. and PetuninA.A.(2017) dealt with the cutting procedure of CNC warm cutting machine is acknowledged by CNC programs. By utilizing diverse CNC mechanical hardware it is indicated that the cutting time is distinctive for parts which have a similar absolute edge of shapes. So as to break down the outcomes the exploration of training mechanical models was directed. The gathering of CNC sheet metal-move cutting machines can be picked. It can incorporate warm (laser, plasma, oxy-fuel) cutting machines. Because of the way that warm cutting has a high precision and execution the utilization of warm cutting machines is extremely normal. It characterizes the precision of hardware working pace computation for parts of different arrangements, geometries and in general measurements. It likewise considers issue of figuring precision of working apparatus way speed contingent upon number of edges in NC programs for parts of any setup for CNC laser cutting machine ByStar 3015.

Michal Matuga(2018)presented a paper of flexibility [6]; multi joint automated arm is an intriguing mechanical gear of cutting machine. It presents one of a kind necessities for the control framework intended to deal with movement tomahawks precisely similarly as taking care of world facilitate tomahawks. The most huge test in execution of the automated arm control is the direction arranging, increasing speed and speed control. Further difficulties are alignment of the numerical model and usage of on the web, constant adaptively. The necessities can be effectively happy with minor restrictions, and the mechanical arm can be

viewed as intriguing and advantageous gear that can possibly build estimation of standard cutting machines.

BreazRadu-Eugan, TarnoveanSorin, Biris Cristina, Boroga Octavian Cinstantin(2012) developed a methodology for improving the dynamic conduct and rectangular corners profiling precision of a CNC laser cutting machine. The technique is expected to be applied by the client of the machine, so it depends on a joint reproduction and test approach. The primary goal of building up this methodology was to offer the client a fast, financially savvy technique to be applied utilized at the workshop level. A straight-forward, yet exact numerical model of a feed pivot of a CNC laser cutting machine, in view of constant exchange capacities was created. The model is based of the notable conditions of a DC servomotor, which were finished with position control conditions and calculations. The feed drive was considered as an as a subsequent request control framework and the tuning procedure depended on the finding of most proper damping proportion, while keeping the greatest current through the engine inside as far as possible. All together for the machine apparatus client to have the option to execute the proposed model, the creators introduced a strategy for figuring of the model boundaries. The information might be assembled for the CNC controller's manual, while different boundaries might be effortlessly decided. The position controller gain  $K_p$  was proposed as the most significant boundary which might be modified so as to improve the conduct of the framework, and some test were acted so as to approve the proposed approach. Different boundaries of the position controller were found to impact neither the dynamic conduct of the machine nor the precision of compromising. It is here observable the way that the forced exactnesses in the field of laser cutting procedures are littler than for processing and additionally turning forms, which likewise exhibits that corresponding increase is sufficient for the vast majority of the applications.

Luciano E. Chiang (2012) said despite the fact that at the time of the experience there was no high pressure help framework gas available, the nature of the cuts acquired shows up great particularly in material plants and fabric seeing the absence of flotsam and jetsam. The edge cut acquired in delicate wood is without splinter however shows an infamous consumed area which is limited at the most elevated feed pace of 4 "/sec. Pasteboard edge cut quality is the best gotten with negligible bums.

SorinTarnovean, Radu E. Breaz, Cristina Biris, Octavian C. Bologa (2016) proposed a straight-forward scientific model of a feed axis of a CNC laser cutting machine[7],based upon nonstop exchange works and introduced a technique for figuring of the model boundaries. Likewise, the numerical character of the control framework was thought about by presenting explicit discrete exchange capacities. So as to permit the client of the machine to play out an investigation about the impact of each control boundary inside the CNC control upon the conduct of the machine, a lot of recreation graphs were created. Initial, a graph for reenacting the conduct of the feed drives of the machine in the quick situating system was introduced. It permits the client to test the dynamic reaction of the feed drive at the most noteworthy feasible speeds and to take restorative activities as needs be. So as to test the capacity of the

machine for compromising at mechanical speeds, without a noteworthy decrease of the speed at the corner point, a particular chart for this circumstance was additionally manufactured. Finally, a reference-word roundabout introduction calculation was thought about so as to consider the molding precision of the CNC laser cutting machine in the roundabout insertion system by methods for reproduction. In view of the numeric calculation, a Simulink chart this specific circumstance was created. Each outline inside the proposed set permits the client to test the dynamic conduct, the following and molding mistakes on every pivot of the machine and to take restorative activities to improve them by changing the control boundaries of the position controller. The recreation chart likewise permits the client to contemplate the impact of the mechanical safe powers. Further exploratory investigations will be acted so as to approve the proposed models. A joint recreation and assembling process, for each critical system, will be unfurled and the control boundaries will be changed by the trial results.

Breaz R. E., Bologa O.C., Biri C., Racz G., Girjob C. and Oleksik V. (2009) in this paper presented a methodology for improving the forming exactness of a CNC laser slicing machine which is reasonable to be actualized at shop floor level. It is notable that modern CNC controllers offer a wide scope of alternatives with respect to the control framework boundaries, which might be modified so as to acquire a superior powerful conduct, and forming exactness of the machine. In any case, the essentialness of these boundaries and furthermore the assurance of some investigative relations to compute an ideal estimation of them are difficult to be found. In addition, complex scientific models of the position control framework on every hub are difficult to be actualized, because of the trouble to quantify and additionally compute the boundaries of such models. The creators proposed a straight-forward numerical model of a feed pivot of a laser cutting machine, in light of ceaseless exchange works and introduced a technique for figuring of the model boundaries. Likewise, the numerical character of the control framework was mulled over by presenting explicit exchange capacities. A reference-word roundabout insertion calculation was contemplated so as to examine the shaping precision of the machine by methods for recreation. In view of the numeric calculation, a Simulink outline for producing the reference inputs was created. The position controller gain  $K_p$  was proposed as the most significant boundary which might be adjusted so as to improve the conduct of the framework, and some test were acted so as to approve.

Ales Hace, Karel Jezernik, Boris Curk, Martin Terbuc (1998) stated that perturbation estimator designed to control inflexible component is successfully redesigned with criticism structure to smother vibration moving control of belt-driven servomechanism. Capacity of repaying aggravations with quick estimator elements is accomplished with shaft situation structure of vibration controller. Sadly, broken changes of static grating can't be complete repaid quickly with a direct compensator. Position following blunders, which happen at speed inversions, are by and by repaid quick with exceptionally straightforward bother estimator control structure.

Wu Gang, Zhang Mianhao (2011) concentrated in their paper the procedure of Taguchi advancement for the cutting boundary in machine in shape to diminish mistakes in this paper. To enhance cutting boundaries, a few examinations were finished by utilizing programming uni-illustrations to produce the instrument way, and do a few trials with machining focus FANUC VMC750E, at that point break down the blunders with CMM, from the investigation results and utilizing the Taguchi strategy, the mistakes can be improved fundamentally by altering the influenced boundaries. The use of these ideal boundaries for assembling will make advantage for organization.

Renann G. Baldovino, Jason P. Rogelio (2013) contemplated that the LASER power controller utilizing PWM procedure gives a proficient and viable strategy to control the measure of LASER beam[8]. As observed from the outcomes, LASER power was controlled effectively utilizing PWM method. In addition, the created PWM controller is cost-efficient. It doesn't require signal molding and extra modules for computerized to-simple converters. Utilizing just a BNC connector to interface the LASER generator to the controller board, the measure of LASER shaft can be controlled.

Paola Leon, Darwin Aguilar (2016) considered that a laser shaper was planned, manufactured and assessed with electronic numerical control, with a serious extent of accuracy and nature of finish for fornx cutting, which at long last has a cutting territory of 170 x 200 mm, additionally has a cutting pace scope of 50 - 250 mm/s because of which can be utilized in fornx of various hues and surfaces with no troubles.

## **2.3 Technological Option for Energy Efficiency Improvements**

### **2.3.1 Description of technology**

Laser cutting is an innovation that utilizes a laser to cut materials, and is commonly utilized for mechanical assembling applications, but on the other hand is beginning to be utilized by schools, private companies and specialists. Laser cutting works by coordinating the yield of a powerful laser, by PC, at the material to be cut. The material at that point either melts or consumes or disintegrates away, or is overwhelmed by a stream of gas, leaving an edge with a great surface completion. Modern laser cutters are utilized to cut level sheet material just as auxiliary and channeling materials. There are three principle sorts of lasers utilized in laser cutting. The CO<sub>2</sub> laser is appropriate for cutting, exhausting, and etching. The neodymium (Nd) and neodymium yttrium-aluminum garnet (Nd-YAG) lasers are indistinguishable in style and vary just in application. Nd is utilized for exhausting and where high vitality however low redundancies are required. The Nd-YAG laser is utilized where exceptionally high force is required and for exhausting and etching. Both CO<sub>2</sub> and Nd-NdYAG lasers can be utilized for welding. Regular variations of CO<sub>2</sub> lasers incorporate quick hub stream, slow pivotal stream, cross over stream, and chunk. CO<sub>2</sub> lasers are normally "siphoned" by going a current through the gas blend (DC-energized) or utilizing radio recurrence vitality. The RF strategy is fresher and has gotten more famous. Since DC structures require anodes inside the

cavity, they can experience terminal disintegration and plating of cathode material on crystal and optics. Since RF resonators have outer cathodes they are not inclined to those problems. CO<sub>2</sub> lasers are utilized for modern cutting of numerous materials including mellow steel, aluminum, tempered steel, titanium, paper, wax, plastics, wood, and textures. YAG lasers are fundamentally utilized for cutting and scribing metals and earthenware production. Notwithstanding the force source, the kind of gas stream can influence execution too. In a quick hub streams Laser cutting on a sheet of steel. Computer aided design (top) and treated steel laser-cut part (base) Replacement of ordinary cutting machine with CNC Laser Cutting Machine 17 resonator, the blend of carbon dioxide, helium and nitrogen is coursed at high speed by a turbine or blower. Cross over stream lasers circle the gas blend at a lower speed, requiring a less complex blower. Piece or dispersion cooled resonators have a static gas field that requires no pressurization or dishes, prompting investment funds on substitution turbines and china. The laser generator and outside optics (counting the center focal point) require cooling. Contingent upon framework size and setup, squander warmth might be moved by a coolant or straightforwardly to air. Water is an ordinarily utilized coolant, for the most part flowed through a chiller or warmth move framework. A laser smaller scale stream is a water-fly guided laser in which a beat laser shaft is coupled into a low-pressure water fly. This is utilized to perform laser cutting capacities while utilizing the water fly to control the laser pillar, much like an optical fiber, through all out inside reflection. The upsides of this are the water likewise evacuates flotsam and jetsam and cools the material. Extra points of interest over customary "dry" laser cutting are high dicing speeds, equal kerfs and omnidirectional cutting.

Laser cutting is an innovation that utilizes a laser to cut materials, and is commonly utilized for modern assembling applications, but at the same time is beginning to be utilized by schools, independent ventures and specialists. Laser cutting works by coordinating the yield of a powerful laser, by PC, at the material to be cut. The material at that point either melts or consumes or disintegrates away, or is overwhelmed by a fly of gas, leaving an edge with a top notch surface completion. Mechanical laser cutters are utilized to cut level sheet material just as basic and funneling materials.

### **2.3.2 CNC LASER Cutting Machine operations**

Generation of the laser beam includes animating a lasing material by electrical releases or lights inside a shut holder. As the lasing material is animated, the shaft is reflected inside by methods for an incomplete mirror, until it accomplishes adequate vitality to escape as a surge of monochromatic intelligent light. Mirrors or fiber optics Lasing Materials Applications CO<sub>2</sub> Boring Cutting/Scribing Engraving Nd High-vitality beats Low reiteration speed (1 kHz) Boring Nd-YAG Very high vitality beats Boring Engraving Trimming Replacement of regular cutting machine with CNC Laser Cutting Machine 18 are ordinarily used to guide the sound light to a focal point, which centers the light at the work zone. The tightest piece of the engaged pillar is commonly under 0.0125 in (0.3175 mm). In distance across, Depending upon material thickness, kerfs widths as little as 0.004 in (0.1016 mm) are conceivable. So as

to have the option to begin cutting from elsewhere than the edge, a puncture is done before each cut. Puncturing ordinarily includes a high-power heat laser shaft which gradually makes a gap in the material, taking around 5–15 seconds for 1/2-inch-thick (13 mm) tempered steel, for instance. The equal beams of sound light from the laser source frequently fall in the range between 1/16 inch to 1/2 inch (1.5875 mm to 12.7 mm) in breadth. This pillar is typically engaged and escalated by a focal point or a mirror to a little spot of about 0.001 inch (0.0254 mm) to make an extraordinary laser bar. So as to accomplish the smoothest conceivable complete the process of during form cutting, the bearing of shaft polarization must be turned as it circumvents the outskirts of a shaped work piece. For sheet metal cutting, the central length is for the most part between 1.5 inches and 3 inches (38.1 mm and 76.2 mm). There are a wide range of strategies in cutting utilizing lasers, with various kinds used to cut diverse material. A portion of the techniques are vaporization, liquefy and blow, dissolve blow and consume, warm pressure splitting, scribing, cold cutting and consuming balanced out laser cutting.

Vaporization cutting the engaged beam warms the outside of the material to breaking point and produces a keyhole. The keyhole prompts an abrupt increment in absorptive rapidly developing the gap. As the gap extends and the material bubbles, fume produced dissolves the liquid dividers blowing launch out and further developing the gap. Non softening material, for example, wood, carbon and thermo set plastics are normally cut by this technique.

- ✓ Vaporization cutting the engaged beam warms the outside of the material to breaking point and produces a keyhole. The keyhole prompts an abrupt increment in absorptive rapidly developing the gap. As the gap extends and the material bubbles, fume produced dissolves the liquid dividers blowing launch out and further developing the gap. Non softening material, for example, wood, carbon and thermo set plastics are normally cut by this technique.
- ✓ Melt and blow or combination slicing utilizes high-compel gas to blow liquid material from the cutting region, significantly diminishing the force necessity. First the material is warmed to softening point then a gas stream blows the liquid material out of the kerf keeping away from the need to raise the temperature of the material any further. Materials cut with this procedure are normally metals.
- ✓ Thermal stress breaking Brittle materials are especially delicate to warm break, an element misused in warm pressure splitting. A shaft is centered around the surface causing confined warming and warm extension. This outcomes in a split that would then be able to be guided by moving the shaft. The break can be moved arranged by m/s. It is normally utilized in cutting of glass.
- ✓ Reactive cutting additionally called "consuming settled laser gas cutting", "flame cutting". Reactive cutting resembles oxygen light cutting yet with a laser bar as the start source. For the most part utilized for cutting carbon steel in thicknesses more than 1 mm. This procedure can be utilized to cut extremely thick steel plates with

generally little laser power.

- ✓ Tolerances and surface completion new laser cutters have situating precision of 10 micrometers and repeatability of 5 micrometers. Standard unpleasantness Rz increments with the sheet thickness, however diminishes with laser force and cutting rate. When cutting low carbon steel with laser intensity of 800 W, standard unpleasantness Rz is 10  $\mu\text{m}$  for sheet thickness of 1 mm, 20  $\mu\text{m}$  for 3 mm, and 25  $\mu\text{m}$  for 6 mm.

This procedure is equipped for holding very close resiliences, regularly to inside 0.001 inch (0.025 mm) Part geometry and the mechanical adequacy of the machine have a lot to do with resistance abilities. The ordinary surface gets done with coming about because of laser Material. Material thickness (in) 0.02 0.04 0.08 0.125 0.25 Stainless steel 1000 500 250 Aluminum 1000 3800 10000 Mild steel - 400 - 500 - Titanium 250 210. Pressed wood - 650 Boron/epoxy - 3000 Cutting Machine 20 shaft slicing may go from 125 to 250 small scale inches (0.003 mm to 0.006 mm). The creation rate is constrained by various variables. Most extreme cutting rate is constrained by various components, including laser power, material thickness, process type (receptive or inactive,) and material properties. Basic modern frameworks (1 kW+) will cut carbon steel metal from 0.020 inch to 0.5 inch (0.508 mm and 12.7 mm) in thickness. In every practical sense, a laser can be up to multiple times quicker than standard sawing.

### 2.3.3 Technology specification

There are generally three different configurations of industrial laser cutting machines:

Moving material, Hybrid, and Flying Optics frameworks. These allude to the way that the laser bar is moved over the material to be cut or prepared. For these, the tomahawks of movement are ordinarily assigned X and Y pivot. In the event that the cutting head might be controlled, it is assigned as the Z-pivot. Moving material lasers have a fixed cutting head and move the material under it. This technique gives a steady good ways from the laser generator to the work piece and a solitary point from which to expel cutting gushing. It requires less optics, however requires moving the work piece. This style machine will in general have the least bar conveyance optics, yet in addition will in general be the slowest. Cross breed lasers give a table which moves in a single hub (as a rule the X-pivot) and move the head along the shorter (Y) hub. This outcomes in a more consistent pillar conveyance way length than a flying optic machine and may allow a less difficult bar conveyance framework. This can bring about decreased force misfortune in the conveyance framework and more limit per watt than flying optics machines. Flying optics lasers include a fixed table and a cutting head (with laser shaft) that moves over the work piece in both of the even measurements. Flying optics cutters keep the work piece fixed during preparing and frequently don't require material clasp. The moving mass is consistent, so elements are not influenced by shifting size of the work piece. Flying optics machines are the quickest kind, which is invaluable when



cutting more slender work piece. A similar conversation applies to five and six-hub machines, which license cutting framed work pieces. Likewise, there are different techniques for situating the laser pillar to a molded work piece, keeping up a legitimate center separation and spout deadlock, and so on.

### **2.3.4 Suitability or integration with existing process**

Laser cutting machines are utilized for exact shape cutting slender sheet. In modern application these days different sorts and development of laser cutting machines can be met. For shape cutting 3-D meager sheet parts laser cutting machines with pivot developments and laser robots are utilized. Laser creates the light pillar that presents an instrument in working procedure. Utilization of laser cutting machines made conceivable great nature of items, adaptability of creation and amplification of economy. The creation of laser cutting machines started thirty years back. The advancement was quick and at present time each year more than 3000 laser cutting machines is introduced on the planet. Laser cutting is perhaps the biggest utilization of lasers in metal working industry. It depends on disintegrate the material in an exceptionally little zone by centered laser bar. Procedure qualities are: utilizes a high vitality light emission light; pillar is centered around a little spot on the work piece by a focal point; centered shaft liquefies, disintegrates, or combusts material; liquid material is launched out from the liquefy zone by pressurized gas fly. Laser cutting is the rapid cutting with a tight kerf width that outcomes in prevalent and improved quality, higher exactness and more noteworthy adaptability. In figure schematic is demonstrated the laser cutting. By joining the laser bar and the machine giving movement, notwithstanding the applied numerically controlled framework, it is conceivable to accommodate a consistent sheet cutting along the foreordained form. The laser bar can cut exceptionally hard or rough materials. Cutting with lasers is an extremely financially savvy process with low working and upkeep expenses and most extreme Machine Speciation Cutting Pallet Aluminum casing to limiting harm of reflecting laser light Laser Power Control Digital laser power control with programmed corresponding beating and shading join Facility Requirements Host PC Windows XP fit framework Air Assist Compressor with Gas Tank to give dry air, 20 Lit/min, 7kg/cm<sup>2</sup> with 8mm breadth hose. Fumes System One fumes blower (2HP), Pressure 50 mm Aq, Air stream 30m<sup>3</sup>/min with two 8" measurement hoses. Outer Chiller DI Water, 4000BTU (90D,140D)/8000BTU (280D)/18000BTU (200R), Cooling Capability Flow rate>5Lit/min. Supplanting of ordinary cutting machine with CNC Laser Cutting Machine 23 adaptability. These days in mechanical application different sorts and development of laser machines for form cutting meager sheet can be met. Laser machines for form cutting meager sheet present the result of high innovation. They are made out of: laser, bar managing, cutting head, organize table, framework for vitality gracefully and control unit. In fig. is indicated the essential setup of laser cutting machine. Laser, the optical quantum generator, produces the light shaft that presents a device in working procedure. By optical framework in cutting head the laser pillar is engaged in measurement from 0,2 mm with the force thickness more than 108 W/cm<sup>2</sup>. Since our craving is to expel the vanished and liquid material from the influenced zone as quickly as time permits, the laser cutting is performed with a coaxial help gas. The gas blowing builds the feed rate for as much as 40 %. Cutting procedure along form

is acknowledged with the development of laser pillar or work piece. Machine for developments is understanding with necessities of laser machine. For assortment of work laser machine have a help tables that can be provided: a straightforward cutting lattice, a cutting table with movable and removable beds and a change-over table. In modern application these days different sorts and development of laser cutting machines can be met. It relies upon, as a matter of first importance, what technique is utilized to understand a relative development between the laser shaft and a work piece. The structure and the setup of laser cutting machine rely upon structure and measurement of work piece just as on requested accuracy and working quality. By form cutting 2-D slim sheet parts the utilization of machines with X-Y table organize is viable and genuine when CNC control unit is utilized for control. It is frequently a multi-pivot mechanical framework which licenses straight developments. The CNC is professed to be better than types ordinarily utilized in the production of machine instruments. It is up to multiple times faster, makes up for overwhelm blunders, adjusts the customized laser capacity to the preparing velocity, and controls the cutting gas pressure and the laser boundaries. CNC laser-cutting machine offers an ideal answer for cut a wide range of sheet materials monetarily. For shape cutting 3-D slight sheet parts, revolution developments are added to laser cutting machines. Revolution developments are acknowledged by pivot of cutting head or by turn work piece by included gadgets worktable. Watching the variations of acknowledged laser cutting machines the propensity of standards flying optics<sup>1</sup> is clear. The guideline depends on roomy, mechanical and programmed development of optical pieces of framework for laser shaft transmission a deviation and optical framework for centering laser pillar by cutting head, which are optically and precisely associated. Laser cutting frameworks are commonly utilized for cutting models or little creation runs from sheet stock. Hard tooling is generally more efficient for high volumes. Nonetheless, one high volume application in which lasers have discovered a specialty is cutting car parts. These are currently being made of more slender materials, and trim bites the dust fit for slicing to the necessary resiliences are costly to the point that laser cutting is cost serious in any event, for the enormous part estimates included.

### **2.3.5 Superiority over existing technology**

Current laser cutting robots have thoroughly flying optics engineering. All developments are made by the centering head and the work piece stays fixed. Laser robot takes the laser pillar along any persistent pre-customized way in three-dimensional space, and afterward cuts with exactness, speed and quality. Coordination of the laser pillar controlling in the robot arm structure offers extraordinary favorable circumstances contrasted with ordinary frameworks with outer laser bar directing. All confinements of the availability to dimensional segments are dispensed with because of the high steadiness and the reduced structure of the thin hand verbalization module. Because of the inside outlet of the laser pillar on the wrist, the sixth hub of the robot might be discarded, and the free space can be utilized for entry of the bar. This arrangement offers the accompanying focal points: reduced development of the robot hand verbalization, awesome availability to 3-dimensional parts, ideal work envelope and serious extent of opportunity of movement, high cutting rates, high way precision and financial cost. By laser robot it is important to adjust the situation of the centering focal point

to the genuine situation of the work piece. The robot is fitted with a capacitive sensor on the head for adjust the position and centering the focal point. The sensor is interfaced to the robot control and can peruse the genuine situation of the work piece. The robot therefore moves the focal point to consistently be effectively in center. Along these lines the best quality cut edge is gotten. Laser robot works with programmed programmable laser control and with versatile centering head. Sensors of work pieces, sensors of security and sensors of procedure increment accommodation, unwavering quality and wellbeing of work with laser robots. The requirement for such elite is because of the way that the engaged laser shaft has an all around characterized counterbalance (the central length) and in this way such elements are more to coordinate the apparatus than for the genuine working stages. Uncommon programming that grants convenience of coordination laser power with cutting velocity are available and alluring. Writing computer programs is carted out in a joint effort with an away line framework by methods for a PC. An ever increasing number of frameworks are mentioned to be interfaced with different CAD/CAM frameworks. The most appropriate laser robots are laser robot with Nd:YAG Laser and laser robot with CO2 laser. For Nd:YAG laser, shaft managing is performed from a fixed superior Nd:YAG laser with up to 4 kW bar limit through an adaptable light link in the upper arm of the robot up to the constrained air cooled hand pivot. The fiber optic link is mounted here by means of a connector plug on the hand pivot. The wandering laser pillars radiated from the fiber optic link are guided to the outlet opening at the hand hub by means of two coordinated deviation mirrors. The deviation mirrors are planned as high-intelligent covered quartz substrates. The specific situation of the pillar pivot comparative with the development hub is balanced through altering components on the deviation mirrors. Collimation and centering of laser shaft is performed at the outlet opening of the hand pivot through rib mounted modules that can be deftly adjusted to the preparing task. Application fields of Nd:YAG laser robot are: cutting of sheet metal segments made of steel, tempered steel, aluminum; welding and patching of sheet metal segments made of steel, treated steel, aluminum; welding of thermoplastic materials; solidifying device prepares; develop welding with wire and powder filler metal. The CO2 laser is straightforwardly mounted flexibly on the upper arm of the robot with a mounting section. The pillar exit of the laser is pointing inverse to the hand pivot of the robot. By means of two customizable deviation mirrors made of surface-covered silicon the laser shaft is coaxially guided into the fourth robot pivot. Legitimately on the hand hub there is unbendingly mounted a bar amazing module with two silicon deviation reflects that controls the bar originating from the fourth pivot to the main deviation reflection of the hand hub. Shaft controlling in the hand hub is organized like the adaptation for the Nd:YAG laser. Rather than the quartz substrates surface-covered silicon mirrors are utilized. At the outlet end of the hand pivot there is mounted the cutting head where definite modification of the shaft center situation just as the situation of the cutting spout by means of altering components is conceivable. Application fields of CO2 laser robot are: cutting of materials and plastic movies; cutting of fabric lined plastic parts; welding of plastic materials; cutting and cutting of infusion formed parts; penetrating and puncturing of plastic segments. Case of attributes of laser robots with Nd:YAG laser by means of incorporated fiber optic link and CO2 laser with coordinated laser pillar controlling are appeared. Laser-robot has realized different upgrades in quality, diminished expenses and working occasions.

- ✓ Low connection power
- ✓ Low power consumption
- ✓ Low maintenance costs
- ✓ High speed
- ✓ High accuracy
- ✓ High repeatability
- ✓ Prototyping, a movement which ordinarily costs a vehicle maker a huge number of hours out of every year (the parts to be created extend from single pieces to two or three dozen for trial generation runs).
- ✓ Production in little bunches, extravagance or uncommon vehicles, trucks and transports or parts for the aeronautic trade.
- ✓ Production of extra parts where the robot adaptability is particularly fit to following the enhanced interest.
- ✓ Cutting of huge turbine sharp edge wing forms for rotors and stators. Adaptability of the frameworks is regularly the most significant purpose behind its buy since on account of creation fire up or little bunch creation, visit changes will be fundamental.

### **2.3.6 Availability of technology**

CNC based innovation suppliers are fundamentally worldwide organizations offering the types of assistance in all the significant urban communities of the nation. The innovation is broadly accessible and bunches of national and worldwide makers are providing their items to these enterprises including the machine devices industry.

### **2.3.7 Source of technology**

This innovation is as of now being used in some machine instruments units in the group where the creation necessity is likewise got the aftereffects of decrease in vitality utilization just as decrease in dismissal of material and the innovation is running effectively.

# **CHAPTER 3**

## **TOOLS USED**

### **3.1 Objective**

A CNC etcher is fundamentally the same as idea of CNC processing machine. In this apparatus ways are controlled by means of PC numerical control. The point of this venture is utilized to diminish cost and multifaceted nature of machine. This venture manages the plan of programmed CNC machine for PCB drawing and penetrating, wood etching and cutting, glass cutting. This work is worried about the structure and advancement of Control unit involving the Arduino as the center component in controlling the movement in X, Y and Z heading of the Computer Numerical Control machine. Three unipolar stepper motors are utilized for controlling the tomahawks.

### **3.2 Methodology**

- ✓ The G code interfacing with Arduino CNC based controller.
- ✓ BENBOX module which is used to convert the code in convenient controller code i.e serial to USB converter. Hence it acts like interfacing module between PC to Controller.
- ✓ The code drives the stepper motor by easy drivers which converts the code and as per instructions the stepper motor moves.

### **3.3 Material Used**

- ✓ Arduino Uno Smd Version.
- ✓ A4988 Stepper Motor Driver Module.
- ✓ REES52\_8 - Arduino Compatible CNC Shield V3 Engraving Machine.
- ✓ 4-lead Nema 17 Stepper Motor.
- ✓ REES52 5v Relay Module for Arduino ARM PIC AVR
- ✓ 650nm 250mW Focusable Red Line Laser Module Laser Generator Diode

### **3.4 Specifications**

Specifications are as follows:

#### **3.4.1 Arduino Uno**

*Table 1: Specification of Arduino*

<b>Operating Voltage</b>	<b>5v</b>
SRAM	2KB
EEPROM	1KB

### 3.4.2 Stepper Motor

*Table 2: Specification of A4988 Stepper Motor*

Minimum operating voltage	8 V
Maximum operating voltage	35 V
Maximum current per phase:	2 A
Micro step resolutions	1, 1/2, 1/4, 1/8, 1/16
Size:	0.6" × 0.8"

### 3.4.3 Relay Module

*Table 3: Specification of 5v Relay Module for Arduino*

<b>Use</b>	<b>Used as module for controlling motor</b>
Operating Range	5V - 12 V
Weight	20 grams

## 3.5 Stepper motor & Accessories

It's a combination of stepper engine drive associated with GT2 pulley with Grub screw that is mechanical straight bar and direct orientation that drives rotational movement into liner movement with least contact. Voyaging bar measurement 4mm X 250 mm for Y-Axis and 3 mm X 184 mm for X-Axis. Equipped Stepper Motor with 1:30, 12V. The stepper engine as spoke to in Fig. 2 have 1/30 stage point and the speed is straightforwardly relative to the beat recurrence where it stands of the higher the yield voltage from the simple driver the more degree of force drive. Microcontroller Board: Uno r3 it's an Arduino Board it's chosen to be the control unit in this undertaking, which it's utilized as a movement control board. The Arduino Uno is a microcontroller board dependent on the ATmega328 as appeared in Fig. 3. It has 14 computerized input/output pins (of which 6 can be utilized as PWM yields), 6 simple sources of info, a 16 MHz fired resonator, a USB association, a force jack, an ICSP header, and a reset button. It contains everything expected to help the microcontroller; just associate it to a PC with a USB link or force it with an AC-to-DC connector or battery to begin.



*Fig.1: Stepper Motor*

### **3.6 Power Supply**

12V SMPS (Switch mode Power Supply) is utilized for stepper engine driver. 2V SMPS is utilized to control the microcontroller board (Arduino Uno3). The microcontroller is flashed with GCODE mediator firmware written in improved 'C' language.



*Fig.2: Power Supply adapter*

### **3.7 Stepper Motor Drivers**

This stepper engine driver lets you to work bipolar stepper engines in numerous modes , with a yield drive limit of up to 35V and 2A.The interpreter is the way in to the simple usage of the A4988 Simply contributing one heartbeat on the STEP input drives the engine one miniaturized scale step. The A4988 interface is a perfect fit for applications where a mind boggling microchip is inaccessible or is overburdened.




*Fig 3: Stepper Motor Driver – (A4988)*

It gives Simple advance and bearing control interface Five distinctive advance goals. Movable current control lets you set the greatest current yield with a potentiometer, which lets

you use voltages over your stepper engine appraised voltage to accomplish higher advance rates Intelligent cleaving control that consequently chooses the right current rot mode Over-temperature warm shutdown, under-voltage lockout, and hybrid current protection short assurance.

### 3.8 CNC Shield

This CNC shield is a very much planned board which takes the difficulty out of doing your own equipment design and permits you center around simply coding the Arduino. The shield permits outside force gracefully up to 36V for fueling high power motors, Also has the pins for setting up end stops, hold and resume activity.



*Fig.4: CNC Shield*

### 3.9 LASER Module

A laser is a gadget that transmits light through a procedure of optical discharge dependent on the invigorated emanation of electromagnetic radiation. A laser comprises of again medium, a component to empower it, and something to give optical criticism. The increase medium is a material with properties that permit it to enhance light by method of animated emanation. Light of a particular frequency that goes through the addition medium is enhanced (increments in power). For the addition medium to enhance light, it should be provided with vitality in a procedure called siphoning. The vitality is regularly provided as an electric flow or as light at an alternate frequency. Siphon light might be given by a blaze light or by another laser. This is MXD1230 6mm 650nm 250mW Red Line Laser Module with the customizable focus point.



*Fig 5: Laser Diode (250mw)*



## 3.9 Software Development

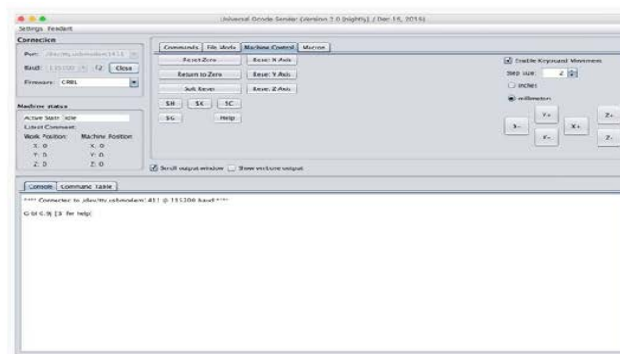


Fig 6 Universal G-code sender

```
Grbl 0.9j ['$' for help]
$0=10 (step pulse, usec)
$1=1 (step idle delay, msec)
$2=0 (step port invert mask:00000000)
$3=7 (dir port invert mask:00000111)
$4=0 (step enable invert, bool)
$5=0 (limit pins invert, bool)
$6=0 (probe pin invert, bool)
$10=3 (status report mask:00000011)
$11=0.010 (junction deviation, mm)
$12=0.002 (arc tolerance, mm)
$13=0 (report inches, bool)
$20=0 (soft limits, bool)
$21=0 (hard limits, bool)
$22=0 (homing cycle, bool)
$23=0 (homing dir invert mask:00000000)
$24=25.000 (homing feed, mm/min)
$25=500.000 (homing seek, mm/min)
$26=250 (homing debounce, msec)
$27=1.000 (homing pull-off, mm)
$100=1280.000 (x, step/mm)
$101=1280.000 (y, step/mm)
$102=250.000 (z, step/mm)
$110=500.000 (x max rate, mm/min)
$111=500.000 (y max rate, mm/min)
$112=100.000 (z max rate, mm/min)
$120=20.000 (x accel, mm/sec^2)
$121=25.000 (y accel, mm/sec^2)
$122=10.000 (z accel, mm/sec^2)
$130=200.000 (x max travel, mm)
$131=200.000 (y max travel, mm)
$132=200.000 (z max travel, mm)
ok
ok
```

Fig 7 program

Fig 6: Universal G- Code Sender

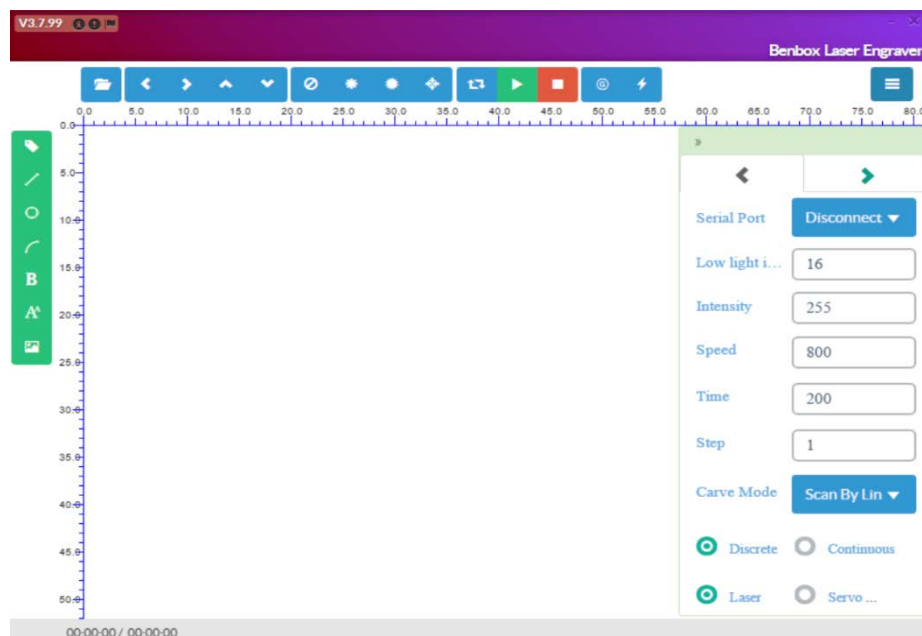


Fig 7: Benbox V3.7.99

The CNC machine utilizes Benbox V3.7.99 programming which is utilized for movement control of the hub. Benbox changes over Gcode into specific orders that Easy driver stepper engine will comprehend. Likewise required another program to send the G-code to Benbox

So as to start writing computer programs it's required for IDE Arduino programming appeared above to make it simpler and more amiable to create G-code. The most ideal route is to utilize "Inkscape" joined with laser engraver module which is an open source graphical supervisor.

### **3.10 Software Algorithm**

- ✓ Converts JPEG/BMP format image into binary code that is sequence of 1's and 0's in to rows (I) and columns (J).
- ✓ The binary code is again converted to ASCII like code which is suitable for Serial communication.
- ✓ Then code is sent to the microcontroller via serial port of Computer.

### **3.11 Microcontroller algorithm**

- ✓ Waits for the serial data to receive it from serial port of computer.
- ✓ If the binary data is of a row then the microcontroller controls horizontal (x-axis) stepper-motor in forward direction. If the row data is binary '1' it operates the Z-axis motor for plotting along with X-motor else if data is '0' it only controls X-motor.
- ✓ If the data of a row is over then it operates the Vertical(y- axis) stepper motor (Moves to next line) before that it retracts the X-axis motor.
- ✓ The microcontroller acknowledges by sending an acknowledgement signal to computer after receiving data from it.
- ✓ This operation repeats until all rows are over that is if all bits are over then the Y- axis goes to initial position and microcontroller waits for next data to come.

## CHAPTER 4

### PRESENT WORK DONE

#### 4.1 Cutting of Acrylic Sheet

To frame the base and backing for the CNC laser etching framework a huge bit of acrylic sheet was cut into a few pieces and cut into according to the utilizations to help the stepper engines and the stepper instrument while likewise shaping the principle base of the entire advance also, and this was finished by penetrating machines and cutters.

#### 4.2 Preparing the Slider

Utilizing super glue gun the slider was glued onto the base plate and the guide into one section. A screw is appended to the equivalent for basic uprightness with 2 extra turning lines shaped by the pens with tops drifting on the pens for the smooth development of the drivers.



*Fig 8: X & Y axis slider*

#### 4.3 Assembling the Slider Rails for the Y-Axis

Before gathering the slider into the base I've stuck 4x little neodymium magnets which I

have rescued from DVD focal point component into the X-plate. This magnets will helps in holding the work piece to the working area.The smooth pole will keep the sliding instrument flawless to the base.



*Fig 9: 6 inch sliding nut*

#### **4.4 Assembling the Slider Rails for the X-Axis**

Here, utilizing super paste and screw I've joined the managing instrument to the laser lodging. Appended the stepper engine onto the spot utilizing the screws and a short time later embedded the smooth poles and directing part into the gaps given by remembering that slider is moving openly not very hard and connected the side edge columns to it.



*Fig 10: X & Y axis slider*

## 4.5 Wiring of Stepper Motors

- ✓ For the stepper motors I've used old usb cable, because it has 4 wire inside and have a cover on it, and it is more flexible and easy to work with.
- ✓ Using continuity mode in millimeter to determine two coils, Coil A and Coil B.
- ✓ I made 2pairs of wire by selecting colors, one pair for the Coil A and second for the Coil B.
- ✓ Soldered them and used heat shrink tube on it.

*Fig 11: 4 wire stepper motors*

## 4.6 Combing the X and Y Axis

- ✓ The X axis controller system and Y axis are prepared separately.
- ✓ The X axis driver system is placed onto a square acrylic sheet.
- ✓ The acrylic sheet is then superglue to the driver system.
- ✓ Then the X axis with its glued cutout forming it's base is placed onto the Y axis system on the free moving system that is formed by the screw and pens, with circular caps on top of pen, so that the X axis can about the Y axis in addition to moving on it's own.

- ✓ Thus the stepper motors can now move in X as well as Y direction.
- ✓ The six inch screwdriver is attached to the stepper motors which provides the driving force for the system as a whole.

*Fig 12: X & Y axis fixed on top of each other*

## **4.7 The Electronics**

- ✓ Arduino Uno.
- ✓ 2x A4988 Stepper motor drivers.
- ✓ 1x IRFZ44N N-CHANNEL MOSFET.
- ✓ 1x LM7805 Voltage regulator with heat sink.
- ✓ 1x 47ohm and 1x 10k resistor.
- ✓ 1x 1000uf 16V capacitor.
- ✓ 1x 2.5mm JST XH-Style 2pin male connector.
- ✓ MALE and FEMALE Header Pins.
- ✓ 1x (20mm x 80mm blank PCB).

In BENBOX the advanced and simple Pins of Arduino are held. The 'Step' pin for the X and Y tomahawks is connected to computerized pins 2, and 3 separately. The 'Dir' pin for the X and Y tomahawks is joined to computerized pins 5 and 6 separately. D11 is for laser Enable. The Arduino gets power through the USB Cable. The A4988 Drivers through outside force source. All ground share normal wiring connections.

VDD of A4988 are connected to 5V of Arduino. The laser I've used runs on 5V and has built in constant current circuit. For the constant 5V source from the external power supply LM7805 voltage regulator is used.

Heatsink is compulsory as it cools down the system passively. The IRFZ44N N-CHANNEL MOSFET works as an electronic switch when receives digital high signal from pin D11 of Arduino. NOTE: 5V from Arduino Uno can't be used because the laser draws more than 250mA and the Arduino Uno is not capable of delivering that much of current.

## **4.8 Configuring Micro Stepping for Each Axis**

### **MS0 MS1 MS2 Micro-step Resolution:**

Low Low Low Full step


High Low Low Half step

Low High Low Quarter step

High High Low Eighth step


High High High Sixteenth step

The 3 pins (MS1, MS2 and MS3) are for choosing one of the five stage goals as indicated by the above truth table. These pins have inner draw down resistors so on the off chance that we leave them disengaged, the load up will work in full advance mode. I've utilized the sixteenth step arrangement for smooth and clamor free. Most (yet positively not all) stepper engines do 200 full advances for every upheaval. By suitably dealing with the current in the loops it is conceivable to make the engine move in littler advances. The Pololu A4988 can make the engine move in 1/sixteenth steps or 3,200 stages for every transformation. The primary preferred position of miniaturized scale venturing is to lessen the harshness of the movement. The main completely exact positions are the full-advance positions. The engine won't have the option to hold a fixed situation at one of the middle of the road positions with a similar position precision or with a similar holding force as at the full advance positions. As a rule when high speeds are required full advances ought to be utilized.

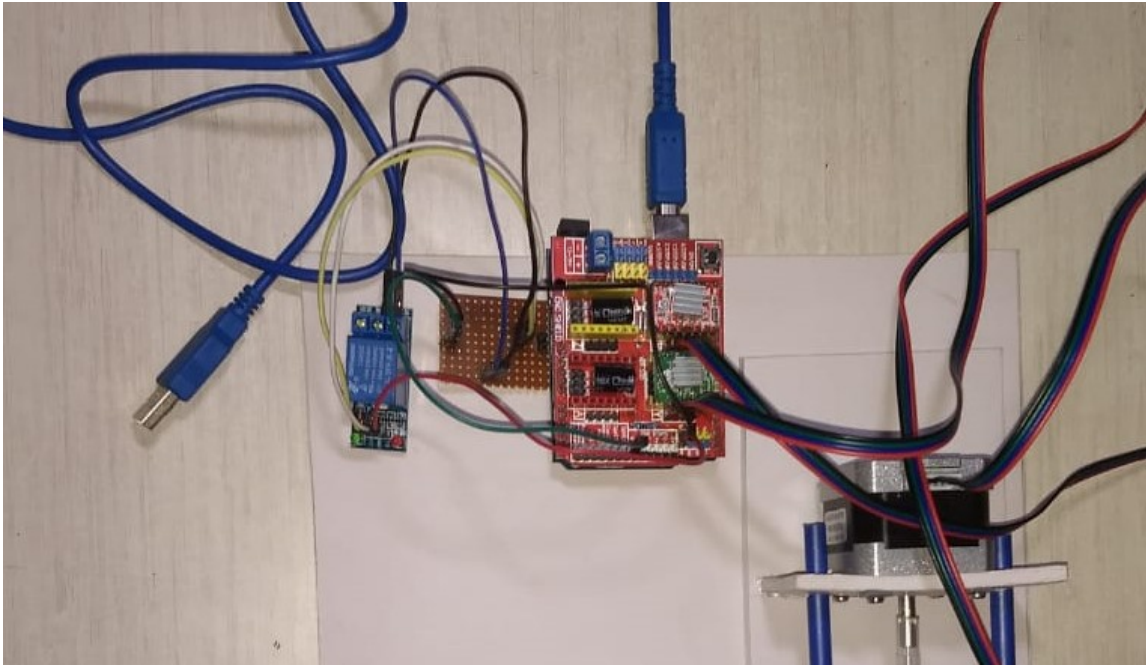

*Fig 13: Connections through Arduino Board*

#### **4.9 Adjusting the Stepper Driver Current**

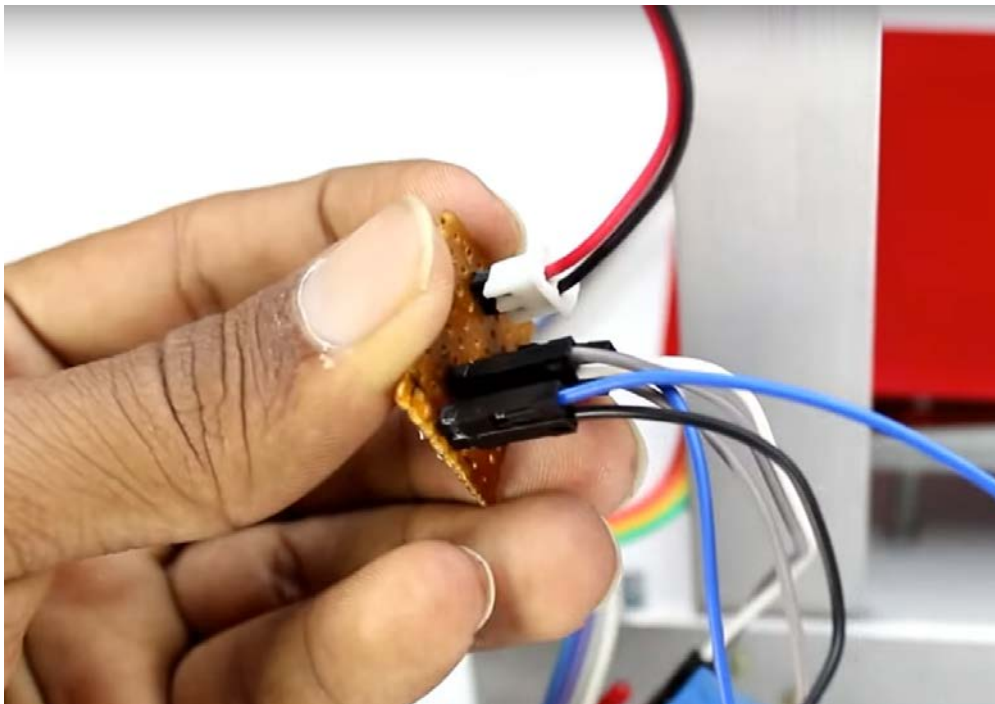

*Fig 14: Power driving PCB*

To accomplish high advance rates, the engine flexibly is ordinarily a lot higher than would be passable without dynamic current constraining. For example, a run of the mill stepper engine may have a most extreme current rating of 1A with a 5 $\omega$  curl obstruction, which would demonstrate a greatest engine flexibly of 5 V. Utilizing such an engine with



12 V would permit higher advance rates, however the current should effectively be restricted to under 1A to forestall harm to the engine. The A4988 supports such dynamic current constraining, and the trimmer potentiometer on the board can be utilized to set as far as possible. One approach to set as far as possible is to place the driver into full-advance mode and to gauge the ebb and flow going through a solitary engine loop without timing the STEP input. The deliberate current will be 0.7 occasions as far as possible (since the two curls are consistently on and restricted to 70% of as far as possible setting in full-advance mode).

The changing the logic voltage level, Vdd, to an alternate worth will change as far as possible setting since the voltage on the "ref" pin is a component of Vdd. Another approach to set as far as possible is to quantify the voltage straightforwardly on head of the potentiometer and to compute the subsequent current breaking point (the current sense resistors are  $0.1\omega$ ). As far as possible identifies with the reference voltage as follows:  $\text{Current Limit} = V_{\text{REF}} \times 1.25$ . So, for instance, if the reference voltage is 0.6 V, as far as possible is 0.75A. As referenced above, in full advance mode, the current through the loops is constrained to 70% of as far as possible, so to get a full-advance curl current of 1A, as far as possible ought to be  $1\text{A}/0.7=1.4\text{A}$ , which relates to a VREF of  $1.4\text{A}/1.25=1.12\text{ V}$ . See the A4988 datasheet for more data. Note: The loop current can be altogether different from the force gracefully current, so you ought not utilize the current estimated at the force flexibly to set as far as possible. The fitting spot to put your present meter is in arrangement with one of your stepper motor loops.

#### **4.10 Laser Assembly**



*Fig 15: Hot gluing Laser Module*

The laser utilized is Focusable Laser Module 200-250mW 650nm. The external metal

lodging fill in as a Heatsink for the laser diode. It has focusable focal point for the alteration of laser dab. Associate the laser wire terminal to the laser attachment on the driver board. These fabry-perot laser diodes are InGaAlP based quantum well lasers which are coupled to a solitary mode optical fiber. The primary highlights incorporate a middle frequency of 655 nm. They depend on a Fabry Perot pit type and convey optical catalyst to 2 mW. They are offered in a coaxial bundle with single mode fiber type 630-HP. These red diode lasers have a worked in screen photograph diode.

#### 4.11 Getting Ready

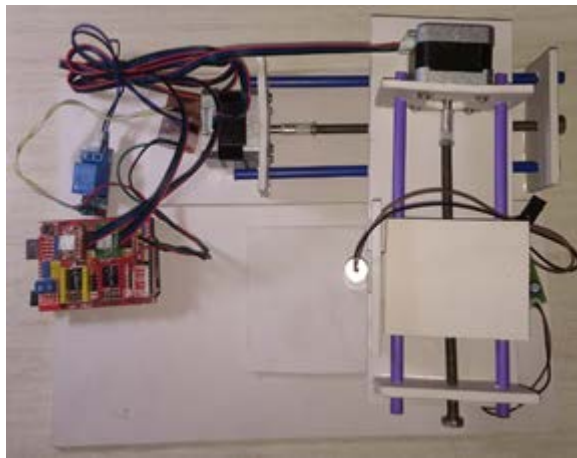


Fig 16: Final Project

By utilizing four little Neodymium magnets lock the working piece on the working bed and set the X and Y-hub to beginning position (home). Catalyst the driver board through outer force source, and Arduino Uno to Computer through a USB A to USB Mini B Cable. Burden up the product to pass the picture that should be engraved on the conceivable surface, through USB the picture is sent to the Arduino and afterward it is changed over into 8 piece bmp network picture when that data is passes onto the laser to begin and quit etching on a superficial level.

#### 4.12 Firmware

- ✓ Start the software on the computer.
- ✓ Run the Arduino IDE
- ✓ From the application bar menu, choose: Sketch -> #include Library -> Add Library from file.ZIP. fig 17:
- ✓ Select the folder Benbox that you can find inside the grlb-master folder and click on Open

- ✓ The library now is installed and the IDE software will show you this message: The library is added to your library. Check the “libraries Inclusion” menu.
- ✓ Then open an example called "Benbox upload" and upload it to your arduino board.

*Fig 17: Benbox*

#### 4.13 Benbox Settings:\$\$ - View Benbox settings

### The Most Difficult piece of the Project :

- ✓ **Adjusting the laser beam into the smallest dot possible on the work piece. This is the Trickiest part which requires time and patience using trial and error method.**
- ✓ **Tweaking the BENBOX settings for \$100, \$101, \$130 and \$131**

We had a go at engraving a square of 40mm sides and after such a significant number of blunder and tweaking the setting of Benbox, I get the best possible 40mm line engraved from the both X and Y-hub. On the off chance that the goal of X and Y-Axis are not same the picture will scale in either course.

For Code – Refer to Appendix

#### **4.14 BENBOX user interface**

- ✓ Connection control: here you can select serial port and proper baud rate for connection, according to Benbox firmware configuration.
- ✓ File control: this show loaded filename and engraving process progress. The green “Play” button will start program execution.
- ✓ Manual commands: you can type any G-Code line here and press “enter”. Commands will be enqueued to command queue.
- ✓ Command log and command return codes: show enqueued commands and their execution status and errors.
- ✓ Jogging control: allow manual positioning of the laser. The left vertical slider control movement speed, right slider control step size.
- ✓ Engraving preview: this area show final work preview. During engraving a small blue cross will show current laser position at runtime.
- ✓ Benbox reset/homing/unlock: this buttons submit soft-reset, homing and unlock command to Benbox board. On the right of unlock button you can add some user defined buttons.
- ✓ Feed hold and resume: this buttons can suspend and resume program execution sending Feed Hold or Resume command to Benbox board.
- ✓ Line count and time projection: Laser BENBOX could estimate program execution time based on actual speed and job progress.
- ✓ Overrides status an control: show and change actual speed and power override. Override is a new feature of Benbox v1.1 and is not supported in older version.

# **CHAPTER 5**

## **RESULT AND DISCUSSION**

### **5.1 Result and Discussion**

*Fig 18: Top view of project*



*Fig 19: Engraved designed by the laser*

The coming of the Portable Laser etcher is so basic and reduced that it has made itself reasonable than that of CO2 Laser Cutters and furthermore to the Small-scale ventures also. This can realize an unrest in the present innovation identified with assembling and creation because of its simplicity of taking care of and flexibility. The primary goal of the Benbox Software is to change over the graphical picture into a G code language; it is the most recent delicate product which lessens the human exertion to create the code. At the point when we import the necessary picture in the configuration of Scalable Vector Graphics (SVG) the Benbox changes over into G-codes which are the assistance to find the directions of the picture. And furthermore it give the necessary capacity to the more extreme engines at determined time, the intensity of the laser additionally constrained by this product.

According to the modern attainability enhanced the expense of the laser cutting and etching machine with the limit of 500mW, 405nm frequency .Based on Literature survey and steps of working strategy disentangled the laser cutting and etching machine. The key point was capable that was to deliver a research center demonstrated Laser cutting and etching machine. The outcome appears for the better quality cutting and etching.

The Special Application CNC etching machine dependent on open source gadgets is planned. The open source based CNC machine has 3 hub movements that is constrained by the BENBOX controller which speaks with the Arduino board which thusly drives the

stepper engine drivers which run the stepper engine. The engine load estimations were done on no heap condition and reasonable recompense for machining is given. The quote of the framework is done and is found to extremely practical contrasted with the shut source frameworks.

The idea was changed over into reality alongside the entirety of its parts. Working model was made with assistance of various parts gained and bought. It was discovered during the led tests that the laser being utilized is just for barely any cuts and as it copies out after a few use. We must be cautious during the association as diode works just in forward inclination condition and under a specific scope of voltage. The stage here can oblige just little articles which can be kept in pocket. The size of stage or bed can be expanded for greater undertakings in future. The essential point was accomplished that was to construct a scale down model of mechanical laser shaper. It was not as simple undertaking as it included arduino programming and c code composing yet with assistance of our administrator and companion the ideal model was made.

## **5.2 Advantages**

- ✓ Low weight.
- ✓ Easily transportable.
- ✓ Low cost
- ✓ Easy setup

## **5.3 Disadvantages**

- ✓ Depth of penetration is low.
- ✓ Works only with D.C supply

## CHAPTER 6

### CONCLUSION AND FUTURE SCOPE

#### 6.1 Conclusions

- ✓ The venture manages the impact of casings number of NC programs on slicing speed applied to CNC laser cutting machine ByStar3015 for material of 1010 with thickness =1, 2, 3, 4mm. The performed explores have indicated that if estimation of edges number  $n$  is not exactly the limit estimation of  $n$  at that point cutting velocity is higher the foreordained speed  $V_{on}$ . In the event that estimation of casings number  $n$  is equivalent the limit estimation of  $n$  at that point cutting rate is equivalent the foreordained speed  $V_{on}$ . In the event that estimation of casings number  $n$  is higher than the edge estimation of  $n$  at that point cutting velocity is not exactly the foreordained speed  $V_{on}$  [12].
- ✓ The instances of hardware course count are viewed as considering the calculation of target capacities with remedy coefficients and without them. The primary model is considered for material of 1010, =3mm. The aftereffect of settling was created by CAD "Sirius". The ideal apparatus course of settling was determined by CAM. The course of cutting instrument is determined by two kinds.
- ✓ In the principal case the benefit of cutting rate is consistent and rises to the foreordained speed  $V_{on}$ . In the second case the benefit of cutting velocity relies upon outlines number of NC programs. In the primary innovative model the got outcomes have indicated that in the event that the cutting velocity is determined by equation (7) at that point the course of cutting instrument is changed contrasted and course of cutting device determined given that cutting rate is steady. There is the refinement of cutting time.
- ✓ The results have shown that the time received in the case of cutting speed correction is reduced compared with the cutting time received in the case of constant cutting speed. This can be explained by the fact that the frames number  $n=76$  (threshold value of frames number  $n=242$ ). If value of frames number  $n$  is less than the threshold value of  $n$  then cutting speed is higher the predetermined speed  $V_{on}$ .
- ✓ A straight-forward, yet exact scientific model of a feed pivot of a CNC laser etching machine, in view of persistent exchange capacities was created. The model depends on the notable conditions of a DC servomotor, which were finished with position control conditions and calculations [11].



- ✓ The input data may be collected for the CNC controller's manual, whereas the other parameters can be easily determined.
- ✓ ☐ The position controller gain  $K_p$  was proposed as the most significant boundary which might be modified so as to improve the conduct of the framework, and some test were acted so as to approve the proposed approach. Different boundaries of the position controller were found to impact neither the dynamic conduct of the machine nor the exactness of compromising. It is here recognizable the way that the forced exactnesses in the field of laser cutting procedures are littler than for processing as well as turning forms, which additionally exhibits that corresponding increase is sufficient for the vast majority of the applications.

## **6.2 Future Prospects**

Present plan can be changed in different manners as there is no limit to advancement. The most significant perspective to be worked upon is the control of laser development, from manual to programmed or contribution to be feed from displaying programming. This will assist with accomplishing exactness and increment the convenience of the machine. As laser cutting is an exothermic procedure, a ton of warmth is created during the procedure so to decrease the warmth a cooling framework ought to be acquainted with behead the warmth delivered. It was seen during the analyses that long taking a shot at laser makes the diode quit working so better laser diode ought to be utilized. As there is no limit to this alteration, as need is felt the improvement work is continued.

### **6.2.1 Improvement in product quality**

CNC lasers accomplish high efficiency and exactness by joining high pivot speeds with ideal cutting conditions over the whole cutting territory, utilizing a one of a kind consistent shaft length framework. In many machines, the disparity of a laser shaft is remunerated by utilization of a telescope or potentially versatile optics. With these frameworks, nonetheless, a variety in cut quality over the cutting zone can happen in light of an adjustment in the central position or potentially central spot size. The consistent shaft length arrangement of the Impulse takes out the uniqueness of the laser bar, guaranteeing indistinguishable outcomes over the whole cutting region, at ideal rates, with prevalent edge quality. The edge work include encourages compromising, especially in thicker plate.

### **6.2.2 Reduction in raw material consumption**

The dismissal of material in CNC LASER cutting is nearly nil while contrasting and existing framework/innovation. Be that as it may, in the cost estimation about 40% of the current pace of dismissal is considered [9].

### **6.2.3 Reduction in GHG emission such as CO<sub>2</sub>, NO<sub>x</sub>, etc.**

There are critical decreases to be accomplished in Green House Gas outflow by reception of advance CNC innovation like CNC LASER cutting machine in machine apparatuses ventures. Decrease in power utilization converts into GHG decreases is evaluated to be of CO<sub>2</sub> 38.12 ton per annum for given vitality sparing and creation.

### **6.2.4 Reduction in other emissions like Sox**

As the present and proposed innovation depends on the spotless fuel based activity in this manner Sulfur is absent in power [10]; subsequently there is no effect on SOX emanations.

### **6.2.5 Cost of technology implementation**

Over the long haul the expense of the CNC laser engravers are gainful as they don't require a lot of human info and could create results constantly without anyone else over the timeframe. Likewise the human blunder in planning and forming is removed from the condition along these lines ending up being a helpful venture. The establishment of CNC LASER cutting machine should be possible in the 14 - 28 days, However the CNC LASER slicing machine is start to finish arrangement of CNC LASER cutting creation procedure, and execution won't influence creation. Along these lines execution of this innovation won't influence the procedure.

### **6.2.6 Prospects of Use of LASER**

- ✓ With ground-breaking R&D quality, being market-arranged, numerous long periods of examination and practice, JQ LASER has built up another propelled strong laser cutting framework with huge configuration and gantry structure. In this machine, we workers YAG strong laser optical framework, so the optical mode is better, the cutting kerf gets littler, and accuracy goes to be higher[11]. The mechanical servo cutting head stays in touch with the metal plate while moving. The center point continues as before. Cutting rate and cutting impact inside the entire working zone is uniform. Double rail situating and ball screw transmission improve the speed, accuracy, movement, dynamic execution

and solidness. In both vertical and even headings of the machine, there are ultra-travel limit switch and polyurethane hostile to crash square, which maximally guarantee the protected activity of the machine. Programmed programming framework yields working request from illustrations records. PC reenacts the preparing way, sets design consequently, improving the working effectiveness and material use. The machine comprises of strong laser cutting machine principle part, high power gracefully, water cooling framework, and PC support. It has the upsides of minimal structure, simple activity Combination of brushes and roller balls completely underpins the sheet, yet brings down the commotion, vibration, and scratching of the material. Adaptable design of the machine can be accomplished with thick or slight tooling styles chose by the necessities of the client. In a monetary atmosphere that presents makers with mounting pressures, it's critical to know there are possibilities for organizations of all sizes that cut metal sheet or plate for their items. Late improvements in plasma and superior quality plasma advances have made this technique cost effective, especially for producers that have utilized or are thinking about utilizing laser cutting.

- ✓ Hyper thermal has performed point by point examinations of these two warm cutting strategies; the charts delineate the cost reserve funds of utilizing plasma. Producers will acknowledge investment funds in both support and operational expenses. While utilization of CO2 lasers is a costly cutting strategy, for certain procedures it might be the main technique. In any case, when a specialist or client permits a maker to suggest and utilize different methods, plasma may end up being the most monetary and effective alternative. For instance, when cutting parts with gaps or comparable highlights that require extraordinary exactness, plasma cutting can now (at times) oblige resistances once held for lasers. Other plasma utilizes incorporate parts which have no close resilience regions, for example, diagram edges or parts for weldments.
- ✓ While these models outline the benefits of plasma over laser cutting, more troublesome circumstances emerge in through-gaps, especially in mounting gaps, where opening shape and roundness are a greater amount of an issue. With the present top quality plasma, even these undertakings are currently inside the capacities of a decent plasma cutting machine, fitted with precise CNC controls and a top quality plasma light. Lasers, with their generally little warmth influenced zones (HAZs), have for quite a long time been the backbones of assembling when tight resilience parts are created with a warm strategy But the moderately significant expenses of activity and possession while picking this technique is a significant thought. Lasers arrive in an assortment of shapes and sizes; the CO2 CNC level sheet cutting machine is the most well-known sort in the greater part of the present assembling situations. High consumptions of vitality are

required to create the laser pillar, albeit little really winds up concentrated on the cutting activity. Huge chillers are expected to evacuate abundance heat.

- ✓ Another change that could improve the productivity of the framework is by changing the cooling arrangement of the laser, as while working it warms up to high temperatures. At first here a warmth sink is utilized to inactively cool it by the air around the framework by the law of thermodynamics, yet to improve it further a fan with heat sink could supplant the cooling framework as the warmth sink will remove the warmth from laser and the fan will acquire cool air, subsequently cooling the warmth sink and bringing about the general lower temperatures. To take it to facilitate outrageous levels a fluid cooling framework can be which will take into account higher force laser, which would not just increment the profundity infiltration in the etching surface yet in addition thicker sketch development.

# REFERENCES

1. Y. Koren, "Advanced Controllers for Feed Drives", *CIRP Annals*, Vol. 41, No. 2, pp. 689-698, 1991.
2. R.L. Hecker, G.M. Flores, Q. Xie and R. Haran, "Servocontrol of Machine-Tools: A Review", *Latin American Applied Research*, 38, pp. 85-94, 2008.
3. K. Astrom, B. Wittenmark, *Computer-Controlled Systems: Theory and Design* (3rd ed.), Prentice-Hall, Englewood Cliffs, NJ, 1997.
4. R. Ramesh, M. A. Mannan, A.N. Poo, "Tracking and contour error control in CNC servo systems", *International Journal of Machine Tools and Manufacture*, Vol. 45, pp. 301-326, 2005.
5. M. Verkhoturov, P. Tarasenko, "Mathematical provision of problem of tool path optimization at flat shape nesting based on "chained" cutting," *Ufa state University Journal of Control and Computer Science*, vol. 10, no. 2(27), pp. 123-130, 2008.
6. R. Dewil, P. Vansteenwegen, D. Cattrysse, "Sheet Metal Laser Cutting Tool Path Generation: Dealing with Overlooked Problem Aspects," *Key Engineering Materials*, 639, pp. 517-524, 2015.
7. Richard Klatfeter et al., *Robotic k.\*engineering: An Integrated Apprmch*, Prentice Hall, 1989.
8. Slo-Syn: AC Synchronous, Qearmotors and DC Stepper Motors Catalog, Superior Electric Co., Bristol, Connecticut, 1989.
9. Ion J (2005) *Laser processing of engineering materials: principles, procedure and industrial application*. Butterworth-Heinemann.
10. Horton N, Bell JK (1997) *Computer-controlled laser cutter with optical sensor*. Google Patents.
11. Leone C, Lopresto V, De Iorio I (2009) *Wood engraving by Q-switched diode pumped frequency-doubled Nd: YAG green laser*. *Optics and Lasers in Engineering*.
12. Li L (2000) *The advances and characteristics of high-power diode laser materials processing*. *Optics and Lasers in Engineering* 34 (4):231-253.
13. A. Petunin, A. Tavaeva, "Optimization of tool route for CNC shapecutting machines provided that working stroke speed is not constant value," *Fundamental researches*, no. 6, pp. 56-62, 2015.
14. A. Tavaeva, D. Kurennov, "Cost minimizing of cutting process for CNC thermal and water-jet cutting machines," in *Proc. Application of Mathematics in Engineering and*

*Economics, Sozopol, 2015, pp. 020003-1-020003-7.*

15. J. C. Liang, H. F. Li, J. X. Yuan and J. Ni, "Comprehensive error compensation system for correcting geometric, thermal, and cutting force-induced errors", *International Journal of Advanced Manufacturing Technology*, 13(10), pp. 708–712, 1997.
16. Timar, S.D., Farouki, R.T., Smith, T.S. and Boyadjieff, C.L., "Algorithms for time-optimal control of CNC machines along curved tool paths", *Robotics and Computer-Integrated Manufacturing*, 21, 1, pp. 37-53, 2005.
17. S. Yang, J. Yuan and J. Ni, "Real-time cutting force induced error compensation on a turning center", *International Journal of Machine Tools and Manufacture*, 37(11), pp. 1597–1610, 1997.
18. J. S. Chen, J. Yuan, J. Ni and S. M. Wu, "Real time compensation of time variant volumetric error on a machining center", *Transactions ASME Journal of Engineering for Industry*, 114, pp. 472–479, 1993.
19. Rober, S.J., Shin, Y.C., "Modeling and control of CNC machines using a PC-based open architecture controller", *Mechatronics*, 5, 4, pp. 401-420, 1995.
20. Zhao, G., Zhang, Q., Jiang, J., "Study on Biaxial Linkage for Full- Closed AC Servo System with Modeling and Experiment", *Advanced Science Letters, Volume 4, Numbers 6-7*, pp. 2009-2014(6), 2011.
21. A. Tavaeva, A. Petunin, "The definition of cutting speed change dependence on frames number of NC programs applied to CNC laser cutting machine," *in press*.
22. Mark W. Spong, Seth Hutchinson, M. Vidyasagar, "Robot Modeling and Control", Wiley, 2005, pp. 61-94, pp. 175-192
23. Crane, Carl D.; Joseph Duffy, "Kinematic Analysis of Robot Manipulators", Cambridge University Press, 1998
24. Denavit, J, Hartenberg, "A kinematic notation for low-pair mechanisms based on matrices", *ASME J. Appl. Mechanics* 77 (1955), pp. 215–221.
25. Slo-Syn: AC Synchronous, Qearmotors and DC Stepper Motors Catalog, Superior Electric Co., Bristol, Connecticut, 1989.
26. H.Kogelnik and T. Li. "Laser lkams and Resonator," *Applied Optics. Vo1.5, No 10*, October, 1966
27. J.E. Bresenham, "Algorithm for Computer Control of a Digital Plotter," *IBM Systems.lournal1, Vol 4. NO. 1*, pp. 1993, pp. 192-206. 25-30, 1965.

# ***APPENDIX***

## ***Code for Benbox***

\$0=10 (step pulse, usec)  
\$1=25 (step idle delay, msec)  
\$2=0 (step port invert mask:00000000)  
\$3=6 (dir port invert mask:00000110)  
\$4=0 (step enable invert, bool)  
\$5=0 (limit pins invert, bool)  
\$6=0 (probe pin invert, bool)  
\$10=3 (status report mask:00000011)  
\$11=0.020 (junction deviation, mm)  
\$12=0.002 (arc tolerance, mm)  
\$13=0 (report inches, bool)  
\$20=0 (soft limits, bool)  
\$21=0 (hard limits, bool)  
\$22=0 (homing cycle, bool)  
\$23=1 (homing dir invert mask:00000001)  
\$24=50.000 (homing feed, mm/min)  
\$25=635.000 (homing seek, mm/min)  
\$26=250 (homing debounce, msec)  
\$27=1.000 (homing pull-off, mm)  
\$100=314.961 (x, step/mm)  
\$101=314.961 (y, step/mm)  
\$102=314.961 (z, step/mm)  
\$110=635.000 (x max rate, mm/min)  
\$111=635.000 (y max rate, mm/min)  
\$112=635.000 (z max rate, mm/min)  
\$120=50.000 (x accel, mm/sec^2)  
121=50.000 (y accel, mm/sec^2)  
\$122=50.000 (z accel, mm/sec^2)  
\$130=225.000 (x max travel, mm)

\$131=125.000 (y max travel, mm)

\$132=170.000 (z max travel, mm)


Settings for the BENBOX is,

\$100=110.000

\$101=110.000

\$130=40.000

\$131=40.000

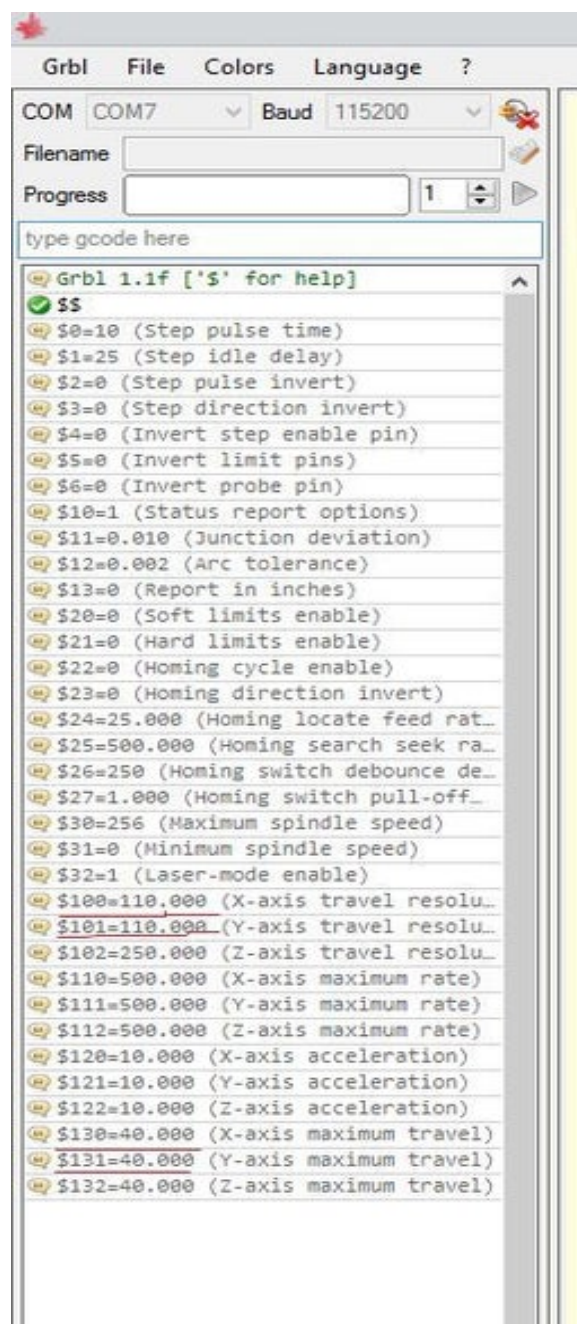



CLOCK=16000000

PROGRAMMER ?= -c avrisp2 -P usb

SOURCE =

main.cmotion\_control.cgcode.cspindle\_control.ccoolant\_control.cserial.c \

protocol.cstepper.ceeprom.csettings.cplanner.cnuts\_bolts.climits.c \

print.cprobe.creport.csystem.c

BUILDDIR = build

SOURCEDIR = grbl

# FUSES = -U hfuse:w:0xd9:m -U lfuse:w:0x24:m

FUSES = -U hfuse:w:0xd2:m -U lfuse:w:0xff:m

# Tune the lines below only if you know what you are doing:

AVRDUDE = avrdude \$(PROGRAMMER) -p \$(DEVICE) -B 10 -F

COMPILE = avr-gcc -Wall -Os -DF\_CPU=\$(CLOCK) -mmcu=\$(DEVICE) -I. -  
ffunction-sections

OBJECTS = \$(addprefix \$(BUILDDIR)/,\$(notdir \$(SOURCE:.c=.o)))

# symbolic targets:

all: grbl.hex

\$(BUILDDIR)/%.o: \$(SOURCEDIR)/%.c

\$(COMPILE) -c \$< -o \$@

@\$(COMPILE) -MM \$<> \$(BUILDDIR)/\$\*.d

.S.o:

\$(COMPILE) -x assembler-with-cpp -c \$< -o \$(BUILDDIR)/\$@

# "-x assembler-with-cpp" should not be necessary since this is the default

```

# file type for the .S (with capital S) extension. However, upper case
# characters are not always preserved on Windows. To ensure WinAVR
# compatibility define the file type manually.

#.c.s:

    $(COMPILE) -S $< -o $(BUILDDIR)/$@

flash: all

    $(AVRDUDE) -U flash:w:grbl.hex:i

fuse:

    $(AVRDUDE) $(FUSES)

# Xcode uses the Makefile targets "", "clean" and "install"

install: flash fuse

# if you use a bootloader, change the command below appropriately:

load: all

    bootloadHIDgrbl.hex

clean:

    rm -f grbl.hex $(BUILDDIR)/*.o $(BUILDDIR)/*.d $(BUILDDIR)/*.elf

# file targets:

$(BUILDDIR)/main.elf: $(OBJECTS)

    $(COMPILE) -o $(BUILDDIR)/main.elf $(OBJECTS) -lm -Wl,--gc-sections

grbl.hex: $(BUILDDIR)/main.elf

    rm -f grbl.hex

    avr-objcopy -j .text -j .data -O ihex $(BUILDDIR)/main.elf grbl.hex

    avr-size --format=berkeley $(BUILDDIR)/main.elf

```

# If you have an EEPROM section, you must also create a hex file for the

# EEPROM and add it to the "flash" target.

# Targets for code debugging and analysis:

disasm:        main.elf

              avr-objdump -d \$(BUILDDIR)/main.elf

cpp:

              \$(COMPILE) -E \$(SOURCEDIR)/main.c

# include generated header dependencies

-include \$(BUILDDIR)/\$(OBJECTS:.o=.d)