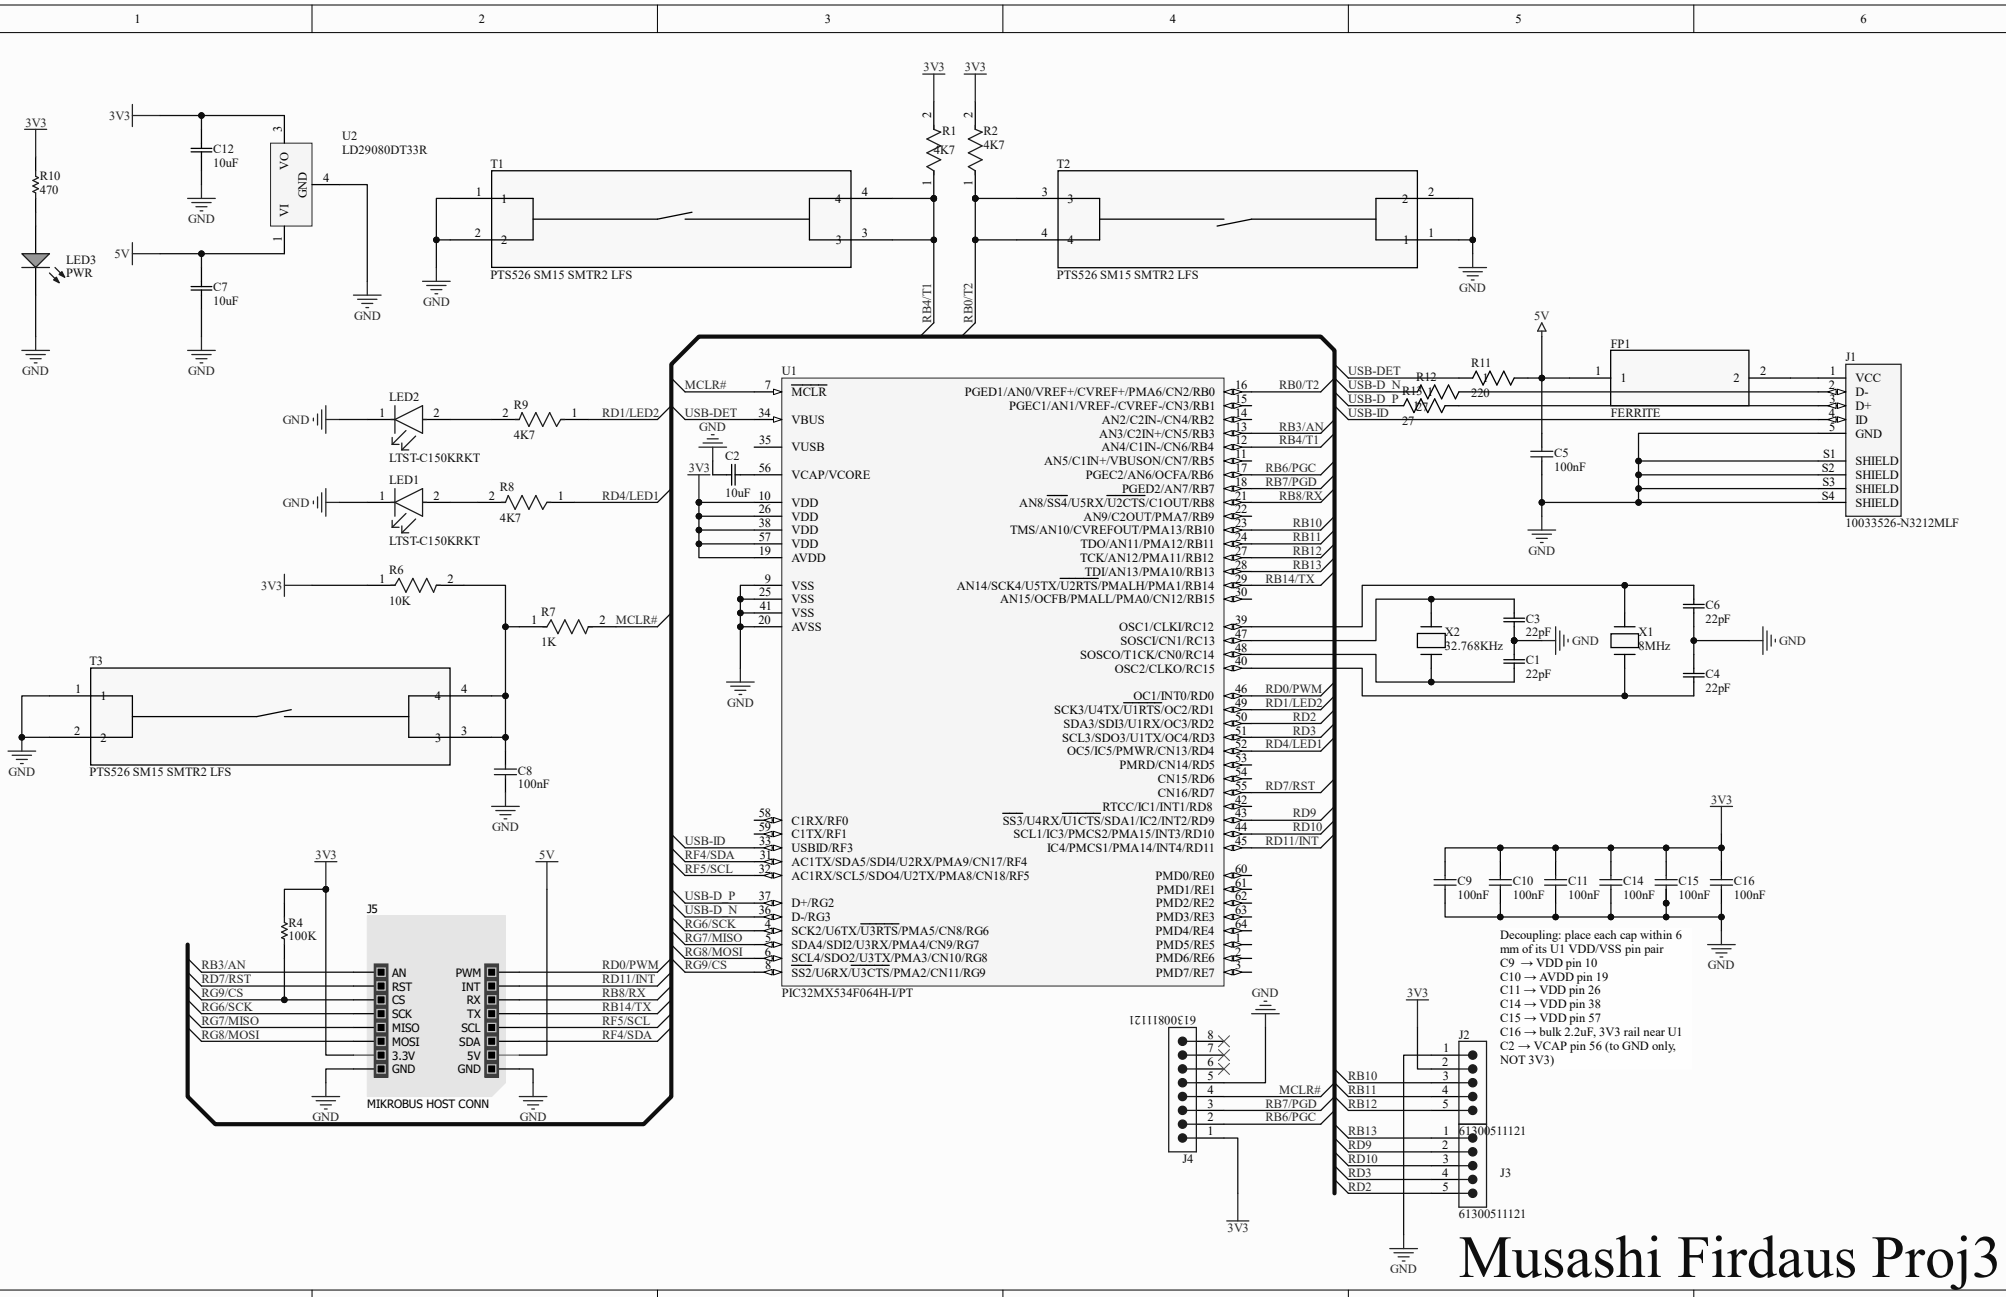

U2
LD29080DT33R
T1
PTS526 SM15 SMTR2 LFS
T2
PTS526 SM15 SMTR2 LFS
T3
PTS526 SM15 SMTR2 LFS
U1
PIC32MX534F064H-I/PT
J5
MIKROBUS HOST CONN
J1
10033526-N3212MLF
FP1
FERRITE
J2
J3
J4
61300511121
X1
8MHz
X2
32.768KHz
LTST-C150KRKT
LTST-C150KRKT
Decoupling: place each cap within 6 mm of its U1 VDD/VSS pin pair
C9 → VDD pin 10
C10 → AVDD pin 19
C11 → VDD pin 26
C14 → VDD pin 38
C15 → VDD pin 57
C16 → bulk 2.2uF, 3V3 rail near U1
C2 → VCAP pin 56 (to GND only, NOT 3V3)
Musashi Firdaus Proj3