

CAD pad: 4 x 3 units, 28 x 31.5 mm spacing; moments about C
Unit-data predictions under IID / first-unit release assumptions; not measured pad reliability


(a) Force boundary, modeled hold = 50%

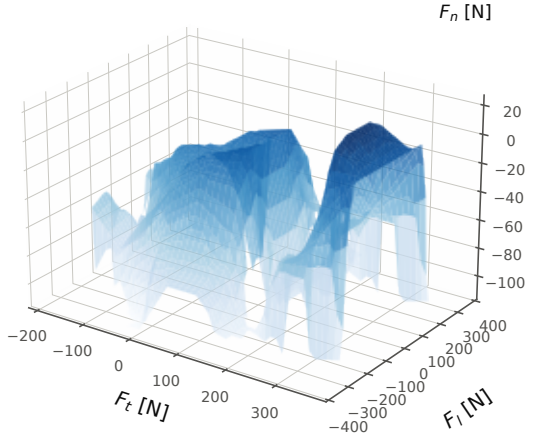


(b) Bending path, F_n = -60 N, hold = 50%

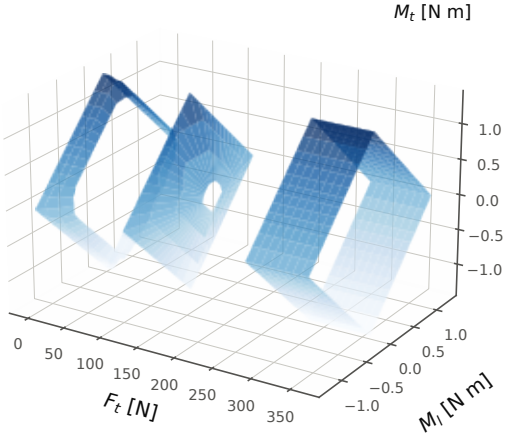


(c) Peel paths, F_n = -60 N, hold = 50%

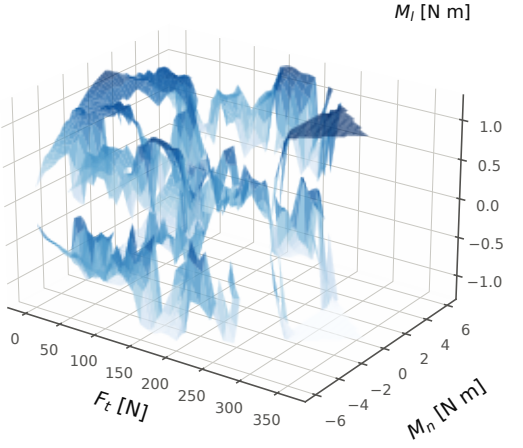

(d) Force slice, F_t = 120 N

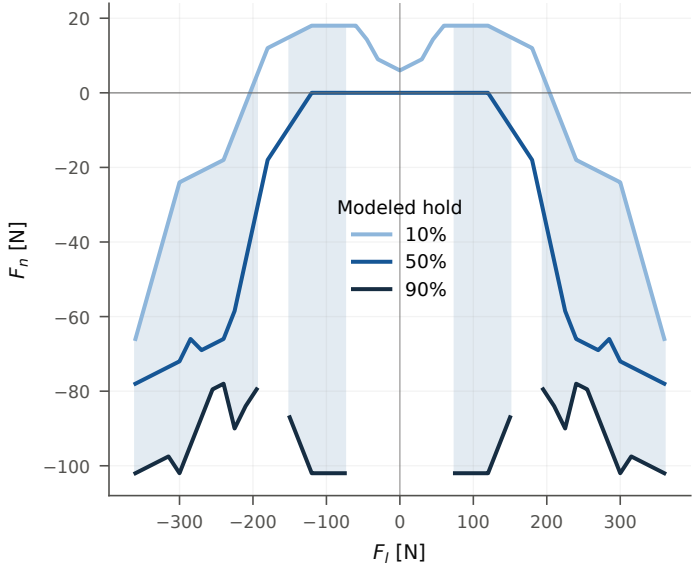

(e) Bending slice, F_t = 120 N

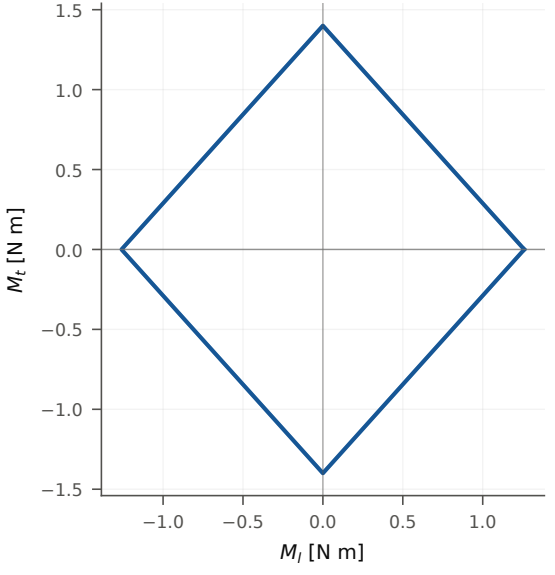

(f) Twist-peel slice, F_t = 120 N

