

BeSafe Service instruction iZi Go X1

Replacing the sun canopy frame springs



Project: iZi Go	Rev.: 08	Date: 20/02/2018	Pages: 1 of 15	Saved: 19-02-2018	Sign:
Done by: HW	7.2.3.03.j iZi Go Replacing sun canopy frame springs - BeSafe service manual rev08 2018 02 20.docx				

7.2.3.03.j Service manual iZi Go X1 Replacing the sun canopy frame springs

Service to be done by:	Retailer
------------------------	-----------------

When do you need this manual:

When the iZi Go X1 sun canopy frame springs need replacing.



What do you need:

Service parts	R2002386 iZi Go Modular Sun canopy spring and screw kit	
Tools	Torx T20 screwdriver	
Remarks	This service instruction applies to iZi Go X1. For replacing the iZi Go Modular sun canopy frame springs, see service manual 7.2.3.09.h	

BeSafe Service instruction iZi Go X1

Replacing the sun canopy frame springs

BeSafe®

Project: iZi Go	Rev.: 08	Date: 20/02/2018	Pages: 2 of 15	Saved: 19-02-2018	Sign:
Done by: HW	7.2.3.03.j iZi Go Replacing sun canopy frame springs - BeSafe service manual rev08 2018 02 20.docx				

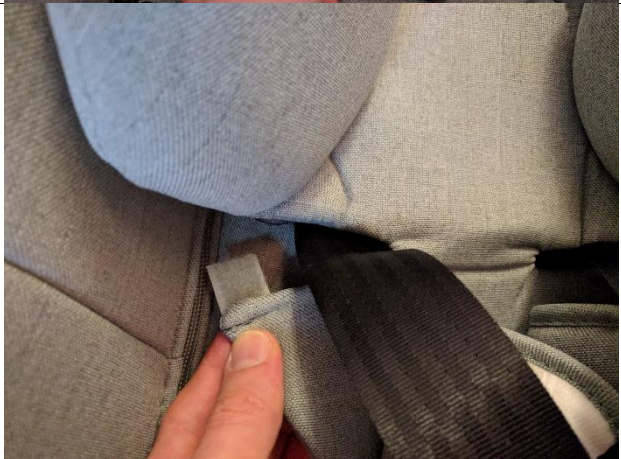
No.	Action	Picture
1.	Place the seat on a protective surface. Put the handlebar in the 'anti-rocking position' (lowest position).	
1.	Open the harness.	
2.	Remove baby insert cushion and put aside.	

BeSafe Service instruction iZi Go X1

Replacing the sun canopy frame springs



Project: iZi Go	Rev.: 08	Date: 20/02/2018	Pages: 3 of 15	Saved: 19-02-2018	Sign:
Done by: HW	7.2.3.03.j iZi Go Replacing sun canopy frame springs - BeSafe service manual rev08 2018 02 20.docx				

No.	Action	Picture
3.	Open the snaplocks of both shoulder pads.	
4.	Open the Velcro connections.	
5.	Pull the headrest cushion forwards and undo the snap locks left and right. Remove the headrest cushion and put aside.	

BeSafe Service instruction iZi Go X1

Replacing the sun canopy frame springs

BeSafe®

Project: iZi Go	Rev.: 08	Date: 20/02/2018	Pages: 4 of 15	Saved: 19-02-2018	Sign:
Done by: HW	7.2.3.03.j iZi Go Replacing sun canopy frame springs - BeSafe service manual rev08 2018 02 20.docx				

No.	Action	Picture
6.	Open the zippers on both sides of the seat.	
7.	Undo the Velcro connections at the end of the zippers.	
8.	Pull the fabric from the top of the seat.	

BeSafe Service instruction iZi Go X1

Replacing the sun canopy frame springs



Project: iZi Go	Rev.: 08	Date: 20/02/2018	Pages: 5 of 15	Saved: 19-02-2018	Sign:
Done by: HW	7.2.3.03.j iZi Go Replacing sun canopy frame springs - BeSafe service manual rev08 2018 02 20.docx				

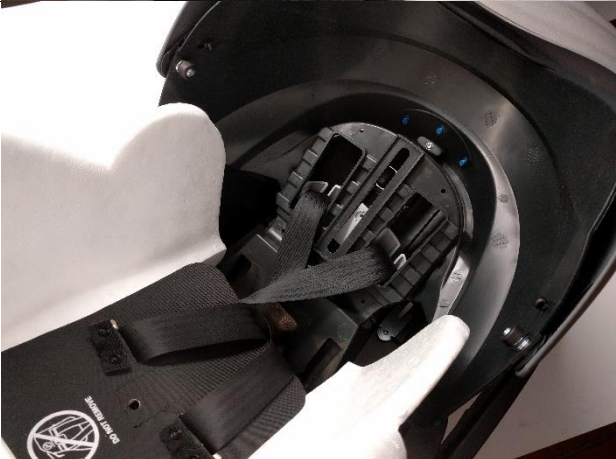
No.	Action	Picture
9.	Remove the fabric inserts from between the seat shell and the EPS foam.	
10.	Push the harness buckle through its sleeve and through the fabric.	
11.	Pull the fabric from the front edge of the seat.	

BeSafe Service instruction iZi Go X1

Replacing the sun canopy frame springs



Project: iZi Go	Rev.: 08	Date: 20/02/2018	Pages: 6 of 15	Saved: 19-02-2018	Sign:
Done by: HW	7.2.3.03.j iZi Go Replacing sun canopy frame springs - BeSafe service manual rev08 2018 02 20.docx				

No.	Action	Picture
12.	Remove the fabric from around the central adjuster cover like indicated. Remove the fabric cover and put aside.	
13.	Unscrew the EPS together with the headrest plate in the middle of the seat. No problem if the screw remains in its pocket after unscrewing. <i>The sign 'Do not remove' is meant for consumers; service operators can safely remove these parts.</i>	
14.	Carefully lift and take out the EPS. The EPS will remain attached to the seat shell by means of the shoulder straps. Place the EPS in the seat shell in such a way that you can access the screws that secure the sun canopy.	

BeSafe Service instruction iZi Go X1

Replacing the sun canopy frame springs



Project: iZi Go	Rev.: 08	Date: 20/02/2018	Pages: 7 of 15	Saved: 19-02-2018	Sign:
Done by: HW	7.2.3.03.j iZi Go Replacing sun canopy frame springs - BeSafe service manual rev08 2018 02 20.docx				

No.	Action	Picture
15.	Put up the sun canopy. Pull out the two black sun canopy rods from the black hinge plates. Repeat on the other side.	
16.	Unscrew the sun canopy frame (if one of the sides was still attached). Remove the black hinge plates and the screw, spring and spring retainer cap, and throw away.	
17.	Position new hinge plates onto the new sun canopy frame, like indicated: The hinge plates are marked L (left) and R (right). <i>(left and right = as seen from the child's position when sitting in the seat)</i>	

BeSafe Service instruction iZi Go X1

Replacing the sun canopy frame springs



Project: iZi Go	Rev.: 08	Date: 20/02/2018	Pages: 8 of 15	Saved: 19-02-2018	Sign:
Done by: HW	7.2.3.03.j iZi Go Replacing sun canopy frame springs - BeSafe service manual rev08 2018 02 20.docx				

No.	Action	Picture
18.	Position the hinge pin of the canopy into the opening of the seat shell.	
19.	While holding the canopy frame, position the new spring, sun canopy spring retainer and screw. Note: If a washer was installed (step 17), do not use this washer again but replace it with the 'sun canopy spring retainer'.	
20.	Position the sun canopy spring retainer like indicated: the notch should be perpendicular to the bottom of the sun canopy, and be directed upward.	
21.	Fasten the screw, until the spring retainer rests internally against the sun canopy hinge pin.	
22.	Repeat step 17 – 21 on the opposing side.	

BeSafe Service instruction iZi Go X1

Replacing the sun canopy frame springs



Project: iZi Go	Rev.: 08	Date: 20/02/2018	Pages: 9 of 15	Saved: 19-02-2018	Sign:
Done by: HW	7.2.3.03.j iZi Go Replacing sun canopy frame springs - BeSafe service manual rev08 2018 02 20.docx				

No.	Action	Picture
23.	Lower the sun canopy. Carefully put the EPS back in position.	
24.	Position the height adjuster directly below the headrest plate. Fasten the EPS and headrest plate to the height adjuster, with the screw in the middle of the seat.	
25.	Put up the sun canopy. Insert the rods in the sun canopy brackets. Insert the 1 st rod in the inner bracket. Repeat on the other side of the seat.	

BeSafe Service instruction iZi Go X1

Replacing the sun canopy frame springs



Project: iZi Go	Rev.: 08	Date: 20/02/2018	Pages: 10 of 15	Saved: 19-02-2018	Sign:
Done by: HW	7.2.3.03.j iZi Go Replacing sun canopy frame springs - BeSafe service manual rev08 2018 02 20.docx				

No.	Action	Picture
26.	If the bead on the sun canopy fabric was loose, fasten it again. To do this, push the bead through the slot in the seat shell. Repeat on the other side of the seat if necessary.	
27.	Lower the sun canopy.	
28.	Position the fabric cover over the seat.	

BeSafe Service instruction iZi Go X1

Replacing the sun canopy frame springs

BeSafe®

Project: iZi Go	Rev.: 08	Date: 20/02/2018	Pages: 11 of 15	Saved: 19-02-2018	Sign:
Done by: HW	7.2.3.03.j iZi Go Replacing sun canopy frame springs - BeSafe service manual rev08 2018 02 20.docx				

No.	Action	Picture
29.	Push the buckle through the fabric and into its fabric sleeve.	
30.	Guide the harness adjustment strap through the hole in the fabric cover. Put the fabric cover around the central adjuster cover. Start at the front and work your way to the rear, like indicated.	
31.	Push the front end of the fabric into the groove at the front of the seat, in between the EPS parts and the seat shell. Start in the middle, work your way towards both ends.	

BeSafe Service instruction iZi Go X1

Replacing the sun canopy frame springs



Project: iZi Go	Rev.: 08	Date: 20/02/2018	Pages: 12 of 15	Saved: 19-02-2018	Sign:
Done by: HW	7.2.3.03.j iZi Go Replacing sun canopy frame springs - BeSafe service manual rev08 2018 02 20.docx				

No.	Action	Picture
32.	Pull both shoulder straps through the fabric cover. Then, close the zipper and fasten the Velcro connection. Repeat on the other side.	
33.	Insert the fabric insert in between the EPS and the seat shell. Repeat on the other side.	
34.	Raise the sun canopy.	

BeSafe Service instruction iZi Go X1

Replacing the sun canopy frame springs



Project: iZi Go	Rev.: 08	Date: 20/02/2018	Pages: 13 of 15	Saved: 19-02-2018	Sign:
Done by: HW	7.2.3.03.j iZi Go Replacing sun canopy frame springs - BeSafe service manual rev08 2018 02 20.docx				

No.	Action	Picture
35.	Pull the top edge of the fabric cover over the top edge of the EPS. At the sides of the seat, ensure the fabric is put in between the EPS and the seat shell.	
36.	Pull the sun canopy fabric over the top edge of the seat shell. Close the sun canopy and verify it runs smoothly.	
37.	Place the headrest cushion in the seat. Bend forward and fasten the snap locks left and right. Bend backwards again and push to fasten the Velcro.	

BeSafe Service instruction iZi Go X1

Replacing the sun canopy frame springs



Project: iZi Go	Rev.: 08	Date: 20/02/2018	Pages: 14 of 15	Saved: 19-02-2018	Sign:
Done by: HW	7.2.3.03.j iZi Go Replacing sun canopy frame springs - BeSafe service manual rev08 2018 02 20.docx				

No.	Action	Picture
38.	Guide the shoulder belts through the openings and close the Velcro connections left and right.	
39.	Guide the shoulder belts over the shoulder pads and close the snap locks (left and right). Make sure the belts are not twisted!	
40.	Insert the baby insert cushion, if necessary.	

BeSafe Service instruction iZi Go X1

Replacing the sun canopy frame springs



Project: iZi Go	Rev.: 08	Date: 20/02/2018	Pages: 15 of 15	Saved: 19-02-2018	Sign:
Done by: HW	7.2.3.03.j iZi Go Replacing sun canopy frame springs - BeSafe service manual rev08 2018 02 20.docx				

No.	Action	Picture
41.	Close the buckle. Loosen / tighten the harness a couple of times to ensure smooth operation. This is the last step in this instruction.	A close-up photograph showing a person's hand with a light skin tone pressing down on the red button of a grey car seat harness buckle. The buckle is attached to grey fabric straps. The background shows the padded interior of a car seat.