F FWallSim · Firewall Course

CLASS 7

Change the LAN subnet

Interfaces, DHCP server, address objects

Intermediate | ~20 minutes | FWallSim v1.0.0 (FortiOS 7.4 style)


YOU WILL LEARN

- Interfaces
- DHCP server
- address objects

BEFORE YOU START

Finish Class 6 first.

The lab network

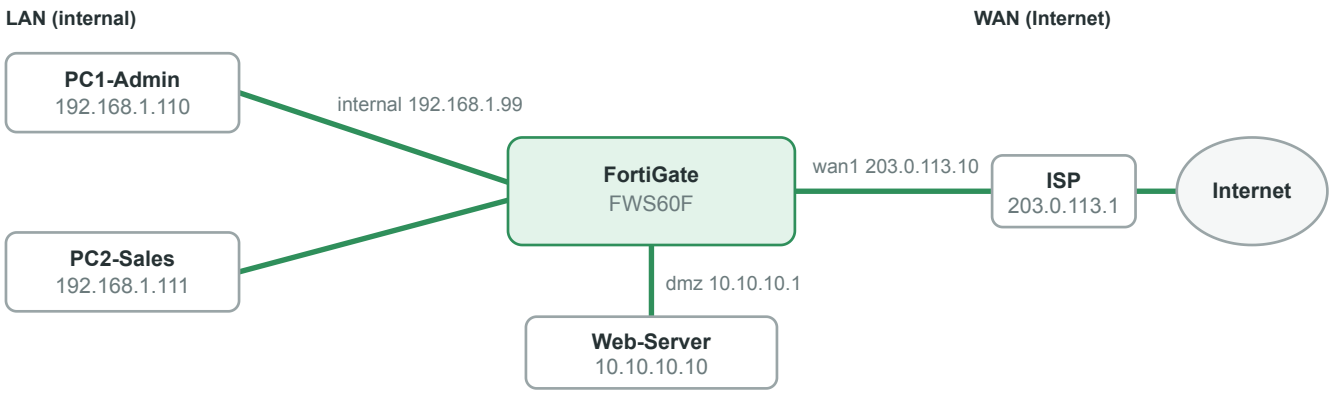

The goal

THE IDEA

Management wants the office LAN moved to 192.168.10.0/24, with the FortiGate at 192.168.10.1. Everything must keep working.

How to start

1. Open FWallSim and log in.
2. Click **Labs** in the header.
3. Find **Change the LAN subnet** and click **Start**.
4. The Lab Guide panel opens. Each task below gets a green tick as soon as it works.

Tasks

1. **internal is 192.168.10.1/24**

   Network > Interfaces > edit internal > IP/Netmask.

2. **The DHCP server hands out 192.168.10.x addresses**


   Same page: DHCP Server address range, e.g. 192.168.10.100 - 192.168.10.200.

3. **PC1 can browse www.example.com again**

   Hint: the policy source is the address object LAN-Subnet, which still says 192.168.1.0/24. Objects must follow the renumbering.

Screenshots

Numbered red markers show where to click or what to look at.

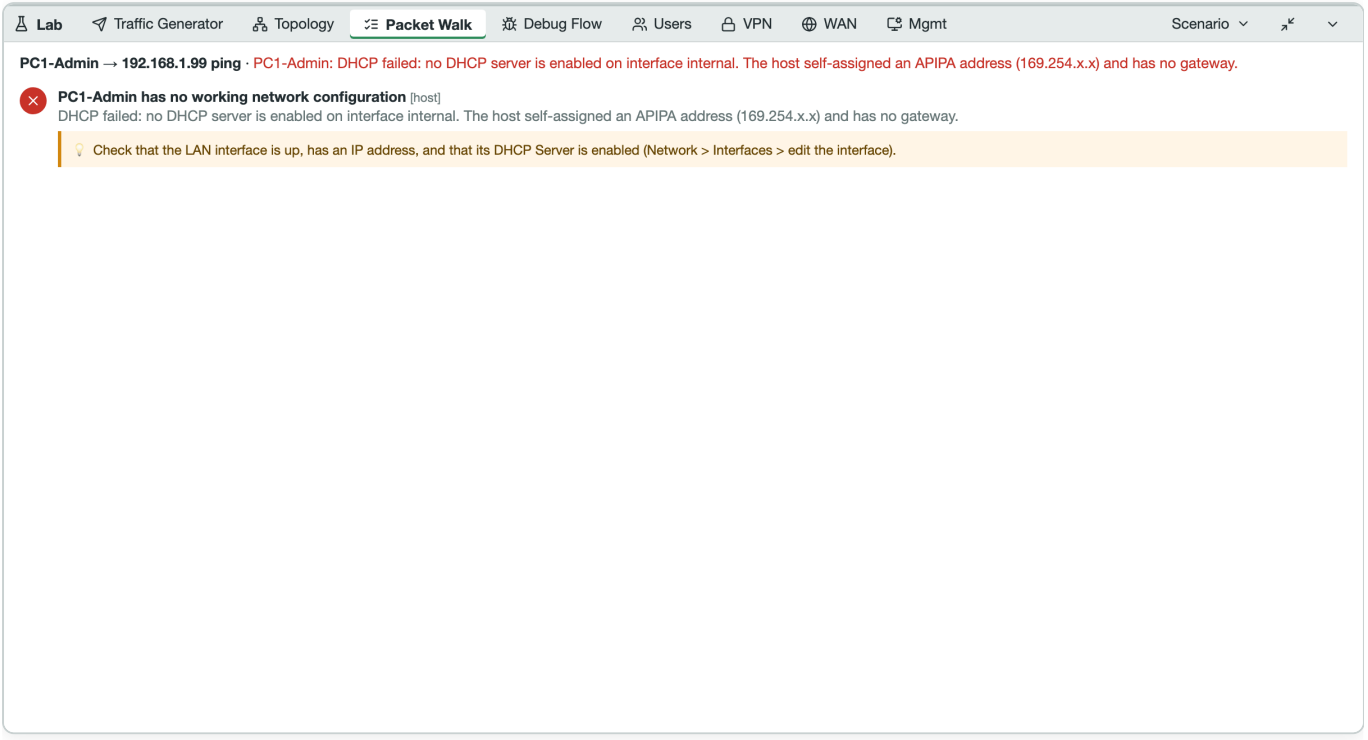

APIPA Walk

Dashboard · Network

1

Static & Dynamic Routing (equivalent of: get router info routing-table all / database)

Network	Gateway IP	Interfaces	Distance	Priority	Type	Status
10.10.10.0/24	0.0.0.0	dmz	0		C Connected	Active
192.168.1.0/24	0.0.0.0	internal	0		C Connected	Active
203.0.113.0/24	0.0.0.0	wan1	0		C Connected	Active
0.0.0.0/0	203.0.113.1	wan1	5	1	S* Static (DHCP)	Active

DHCP

Device	IP Address	Interface	Gateway / DNS handed out	Status
PC1-Admin	192.168.1.110	internal	192.168.1.99 / 96.45.45.45	Leased
PC2-Sales	192.168.1.111	internal	192.168.1.99 / 96.45.45.45	Leased

Interface traffic (since boot)

Interface	Link	IP	RX bytes	TX bytes	RX packets	TX packets
dmz	up	10.10.10.1/24	0 B	0 B	0	0
wan1	up	203.0.113.10/24	0 B	0 B	0	0
wan2	no link	–	0 B	0 B	0	0
internal	up	192.168.1.99/24	0 B	0 B	0	0

Lab | Traffic Generator | Topology | Packet Walk | Debug Flow | Users | VPN | WAN | Mgmt | Scenario

DHCP Leases

Edit Interface: internal

Name: **internal**

Alias:

Type: Hardware Switch

Interface members: internal1, internal2, internal3, internal4, internal5

1 Role: LAN

The role only changes which options the GUI shows (as on a real unit). Policies decide what traffic is allowed.

Address

Addressing mode: Manual | DHCP

2 IP/Netmask: 192.168.1.99/24

Format: 192.168.1.99/24 or 192.168.1.99 255.255.255.0

Create address object matching subnet:

3 Administrative Access:

- [x] PING
- [x] HTTPS
- [x] SSH
- [ ] SNMP
- [ ] HTTP
- [ ] TELNET
- [ ] FMG-Access
- [ ] RADIUS Accounting
- [x] Security Fabric Connection
- [ ] FTM
- [ ] Speed Test

Which management protocols the FortiGate answers on this interface (local-in traffic).

4 **DHCP Server**

Address range: 192.168.1.110 - 192.168.1.210

Default gateway: Same as Interface IP | Specify

192.168.1.99

DNS server: Same as System DNS | Same as Interface IP | Specify

Lease time (seconds): 604800

Network

Device detection:

Comments:


Status: Enabled | Disabled

OK | Cancel


Status

Link Up
Admin Up
IP 192.168.1.99/24
References 1


Edit Internal

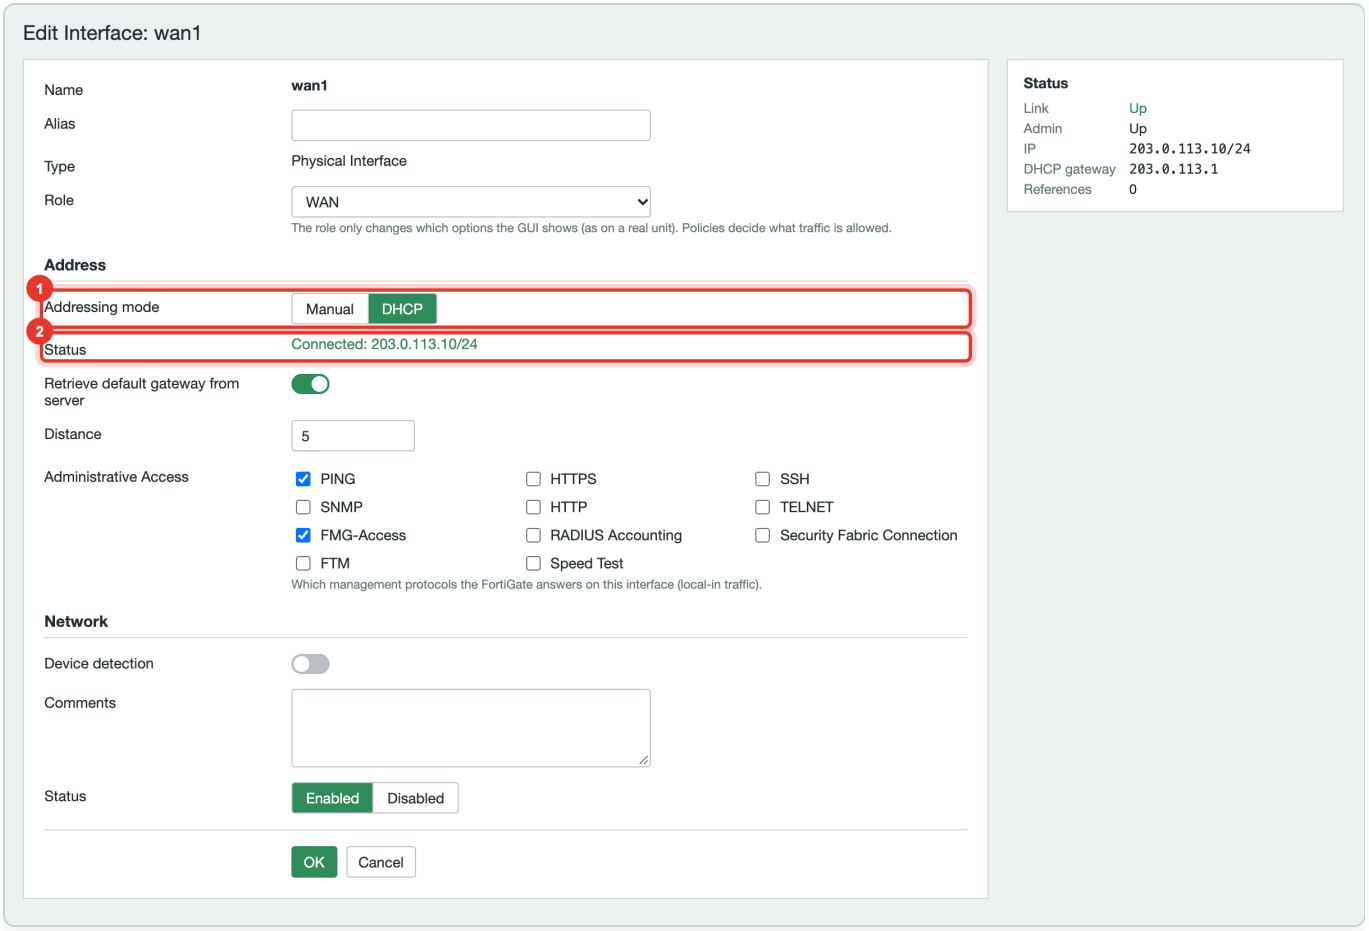

Edit wan1

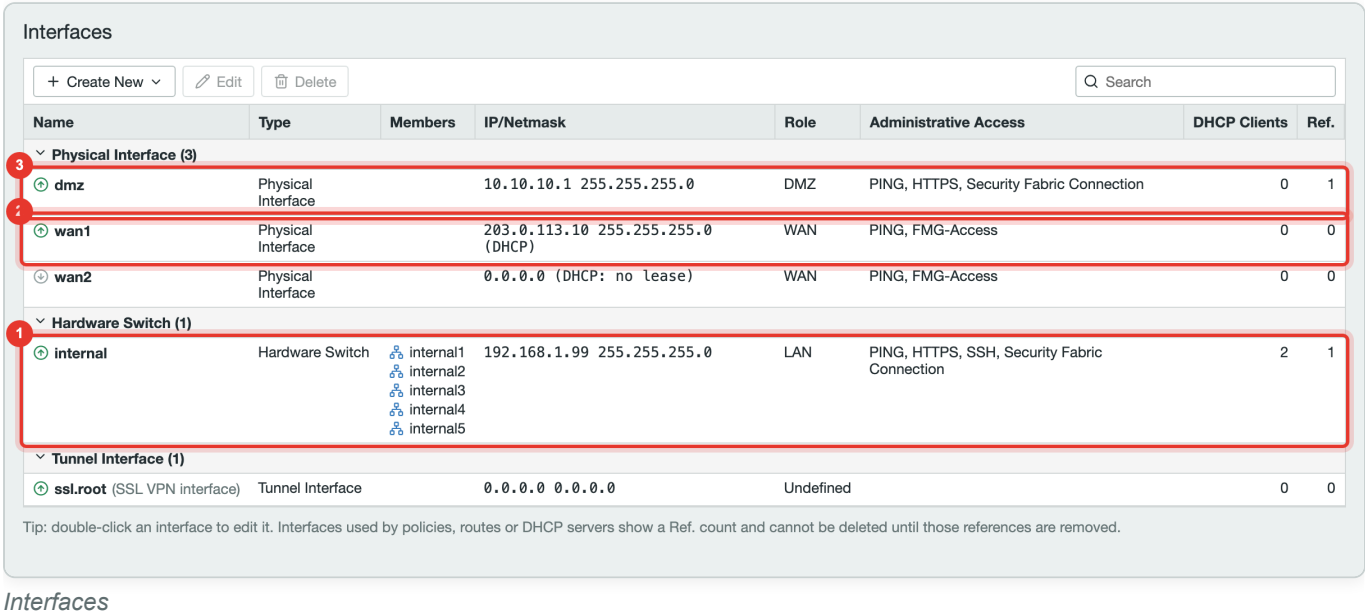

Interfaces

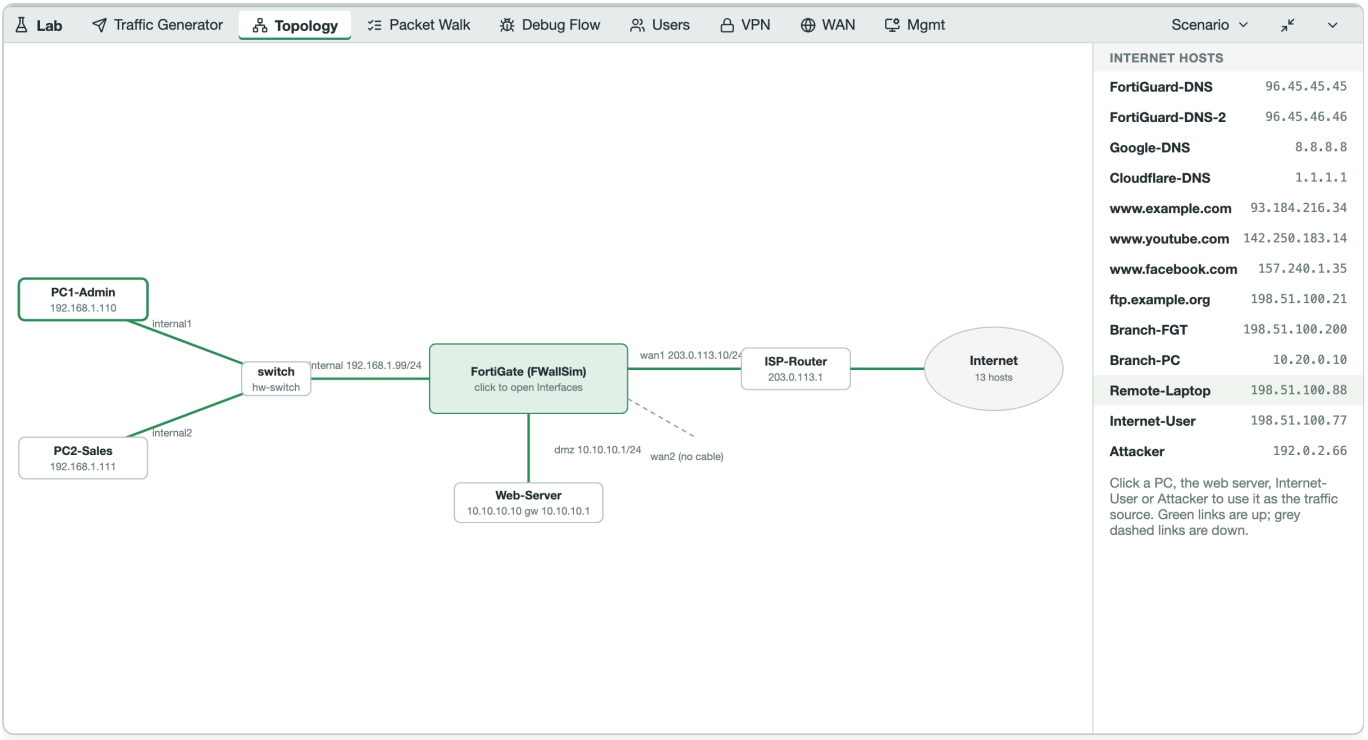

Topology

Next: Class 8: Harden administrative access