F FWallSim · Firewall Course

CLASS 1

# System basics

GUI, System settings, local-in

Beginner ~10 minutes FWallSim v1.1.0 (FortiOS 7.4 style)

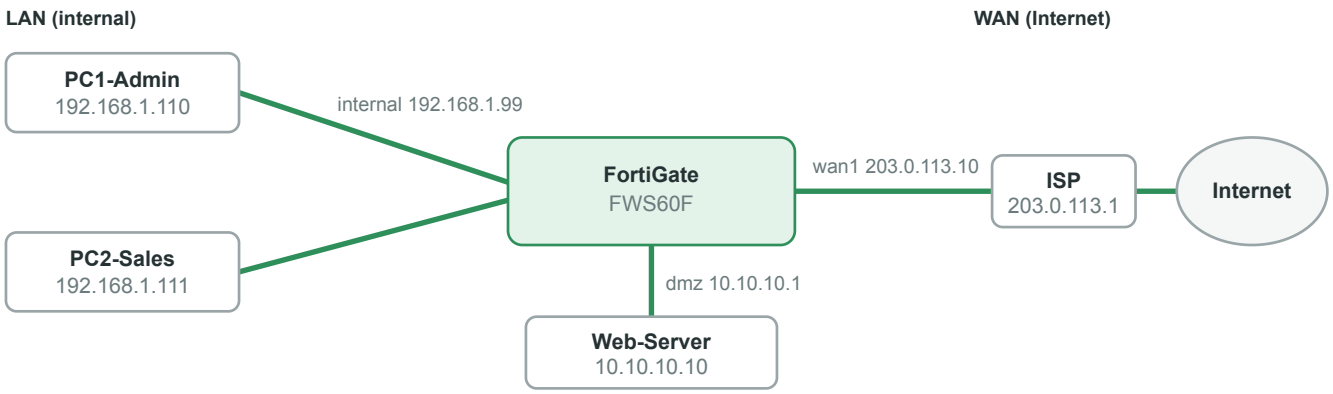
### YOU WILL LEARN

- GUI
- System settings
- local-in

### BEFORE YOU START

Start FWallSim with `npm run dev` and open http://localhost:5173.

## The lab network




## The goal

### THE IDEA

Get comfortable with the GUI. You will rename the firewall, change an admin setting, and prove you can reach the FortiGate from the LAN.

## How to start

1. Open FWallSim and log in.
2. Click **Labs** in the header.
3. Find **System basics** and click **Start**.
4. The Lab Guide panel opens. Each task below gets a green tick as soon as it works.

## Tasks

1. **Change the hostname to HQ-FGT**

   System > Settings > Host name, then Apply. Watch the header and the CLI prompt change.

2. **Set the admin idle timeout to 15 minutes**

   System > Settings > Idle timeout.

3. **From PC1, ping the FortiGate (192.168.1.99)**

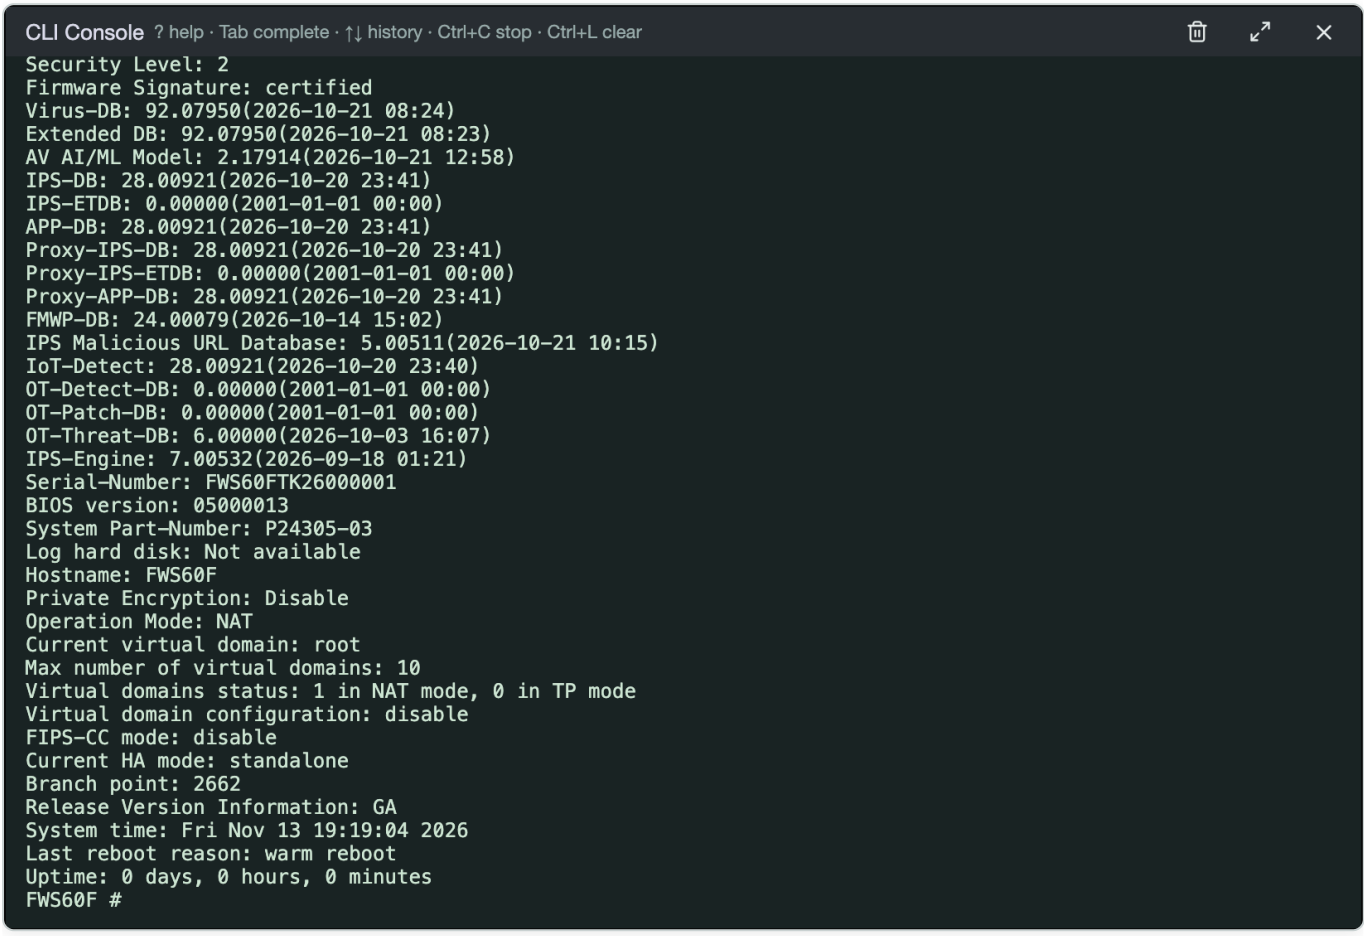
   Lab > Traffic Generator: Source PC1-Admin, Destination 192.168.1.99, application Ping, Send traffic. The tick appears once the ping succeeds. The Packet Walk shows it is local-in traffic.

4. **Open the CLI and run "get system status"**

   Click the >_ button in the header, type get system status and press Enter.

## Screenshots

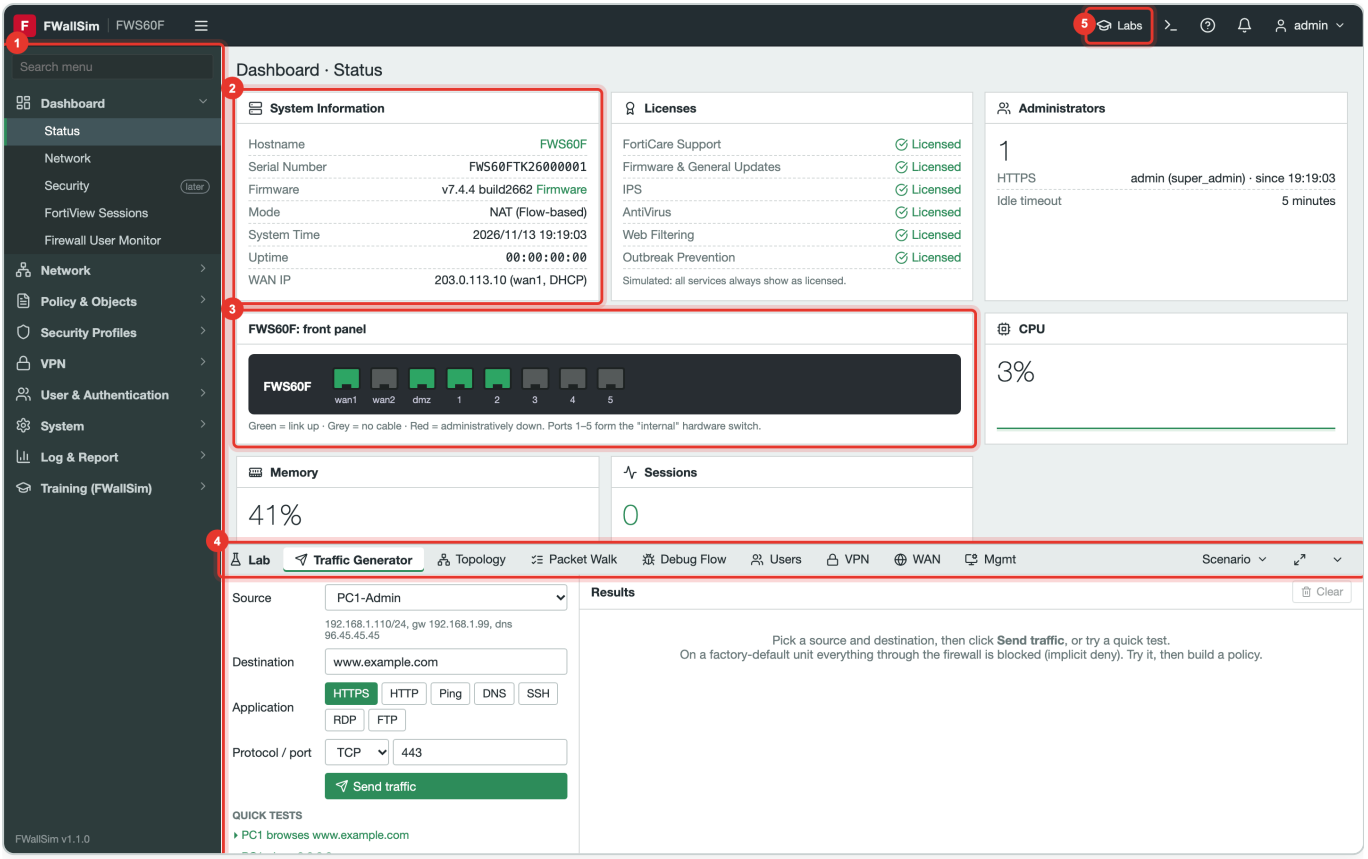
Numbered red markers show where to click or what to look at.




*CLI Status*




*Create Password*



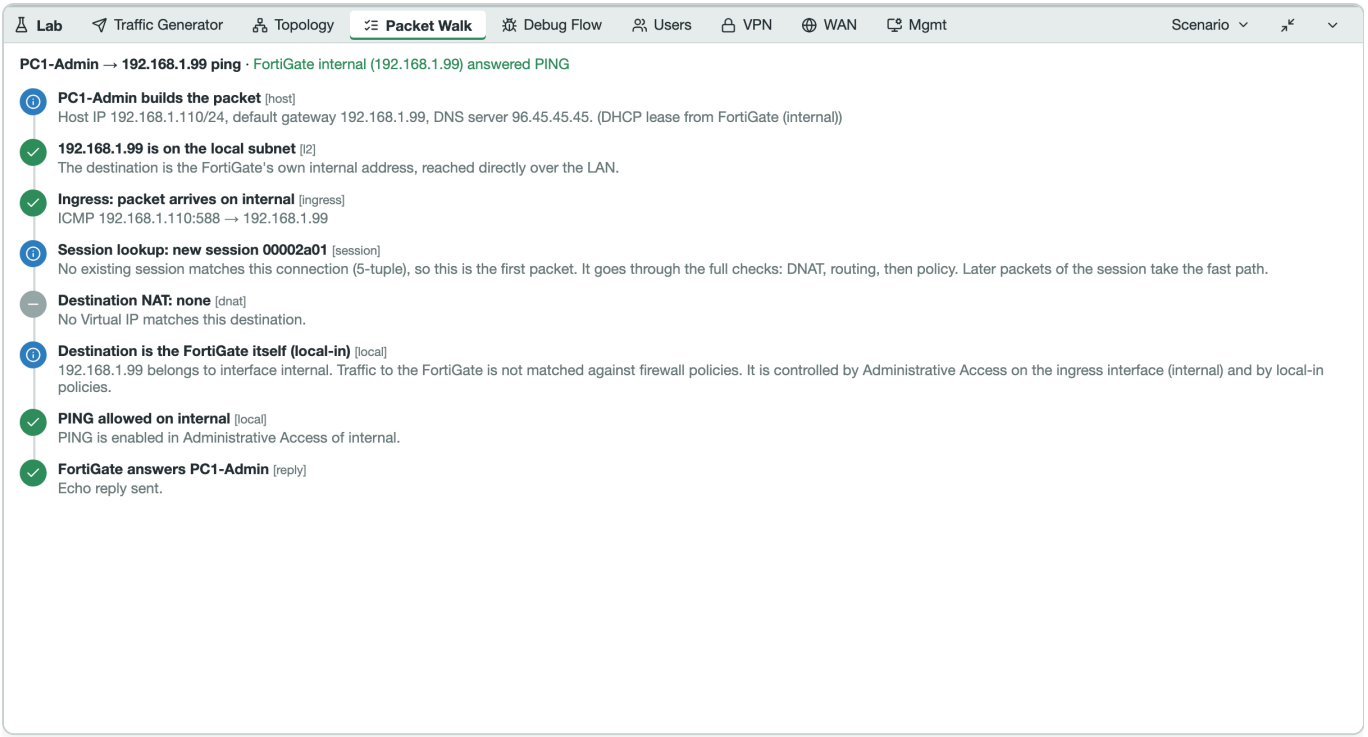

*Dashboard*



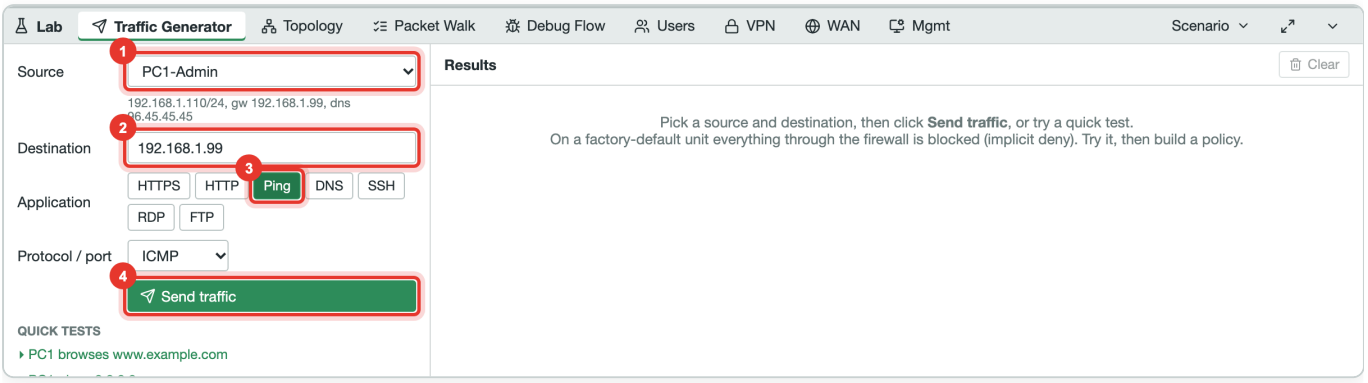

*Header*


FWallSim
FWS60F · v1.1.0
1
admin
2
Password
3
onnecting from (lab)
PC1-Admin (LAN, internal)
4
Login
Log in as admin with the password you created. Forgot it?
Reset below; your training progress is kept.
Forgot password or locked out? Reset to factory defaults
About & privacy

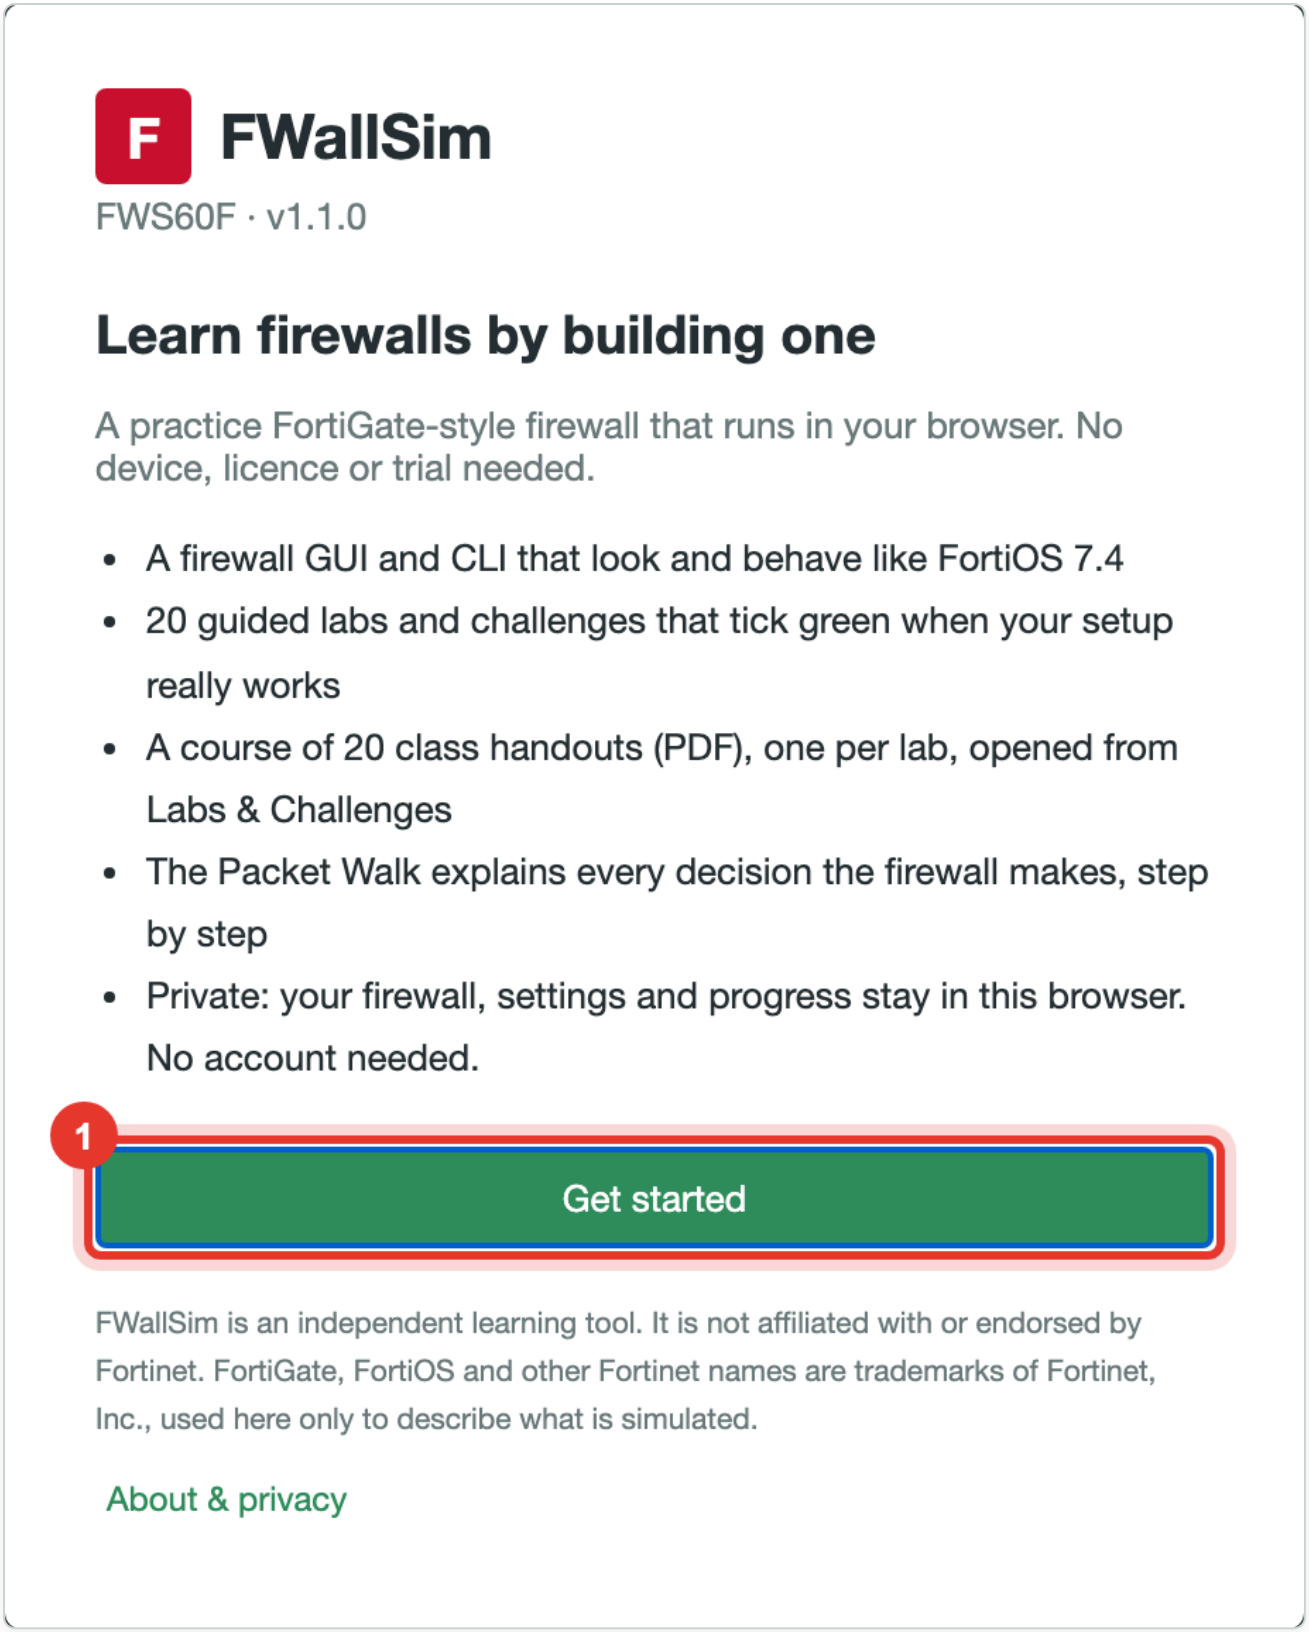
*Login*



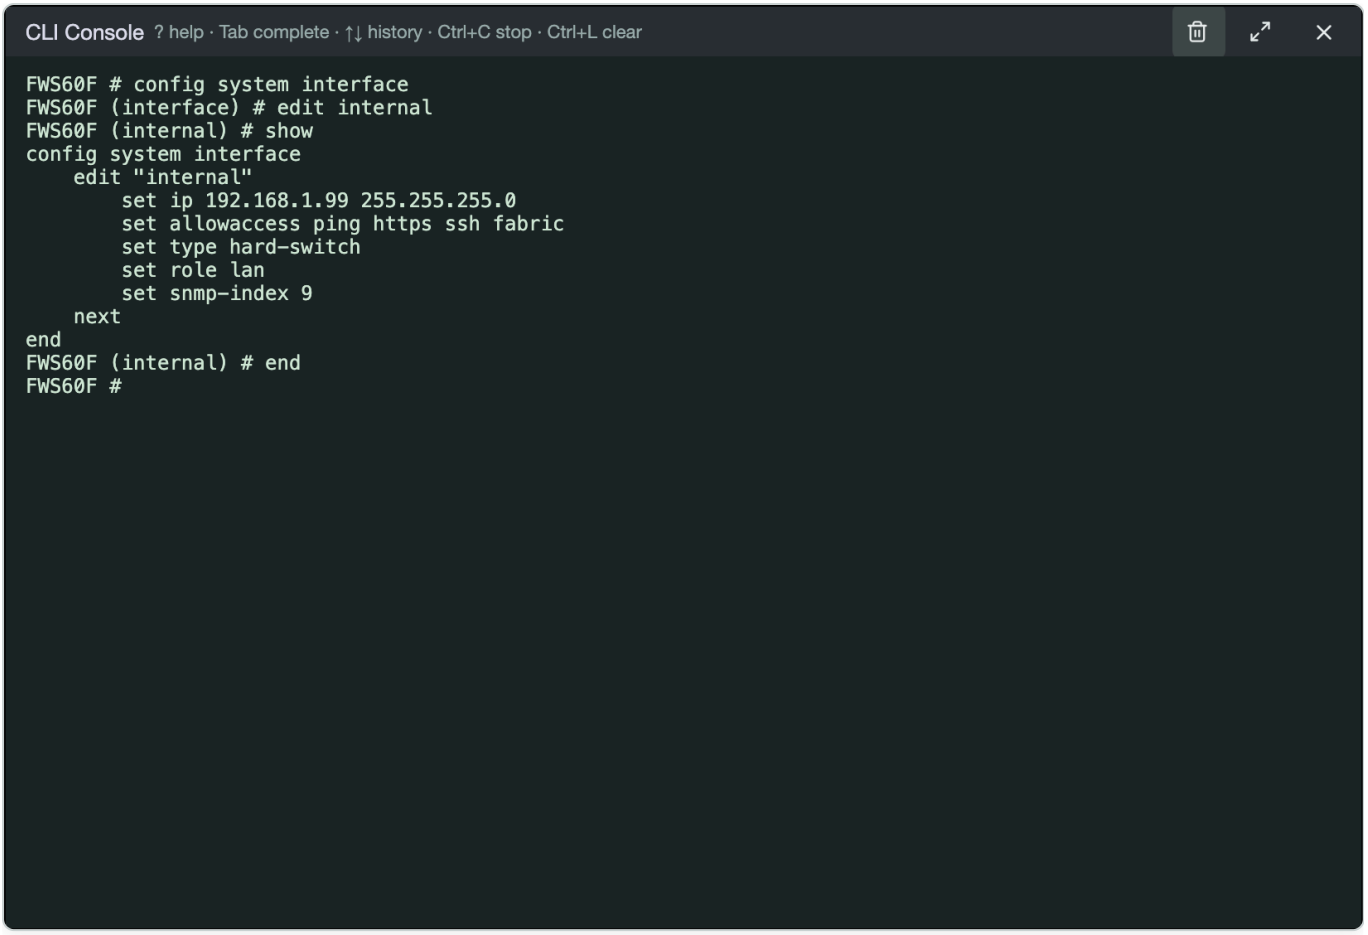

*Ping Walk*



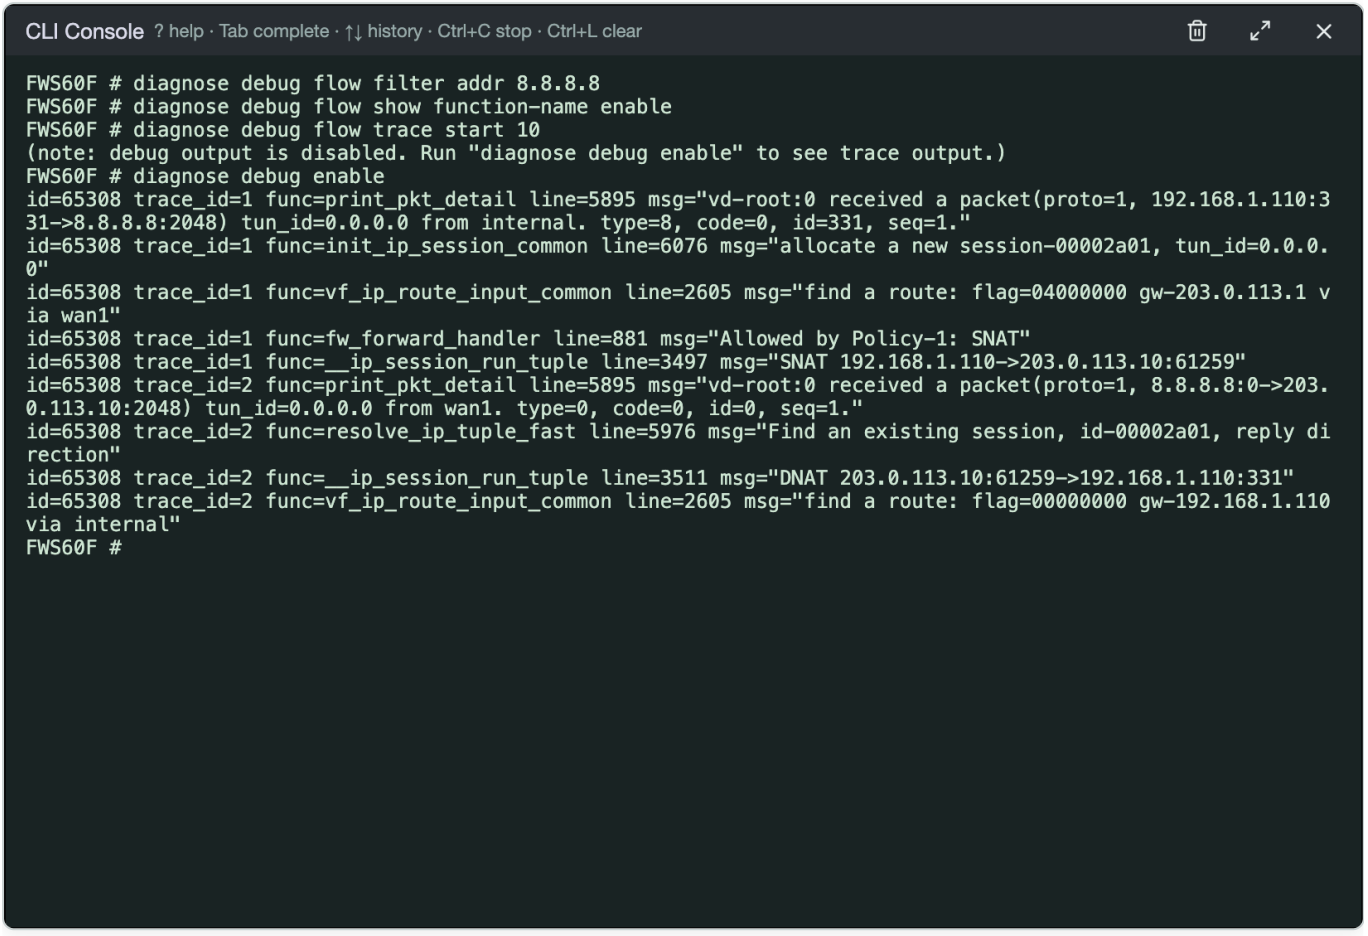

*Traffic Gen*


F
FWallSim
FWS60F · v1.1.0
Learn firewalls by building one
A practice FortiGate-style firewall that runs in your browser. No device, licence or trial needed.
A firewall GUI and CLI that look and behave like FortiOS 7.4
20 guided labs and challenges that tick green when your setup really works
A course of 20 class handouts (PDF), one per lab, opened from Labs & Challenges
The Packet Walk explains every decision the firewall makes, step by step
Private: your firewall, settings and progress stay in this browser. No account needed.
1
Get started
FWallSim is an independent learning tool. It is not affiliated with or endorsed by Fortinet. FortiGate, FortiOS and other Fortinet names are trademarks of Fortinet, Inc., used here only to describe what is simulated.
About & privacy

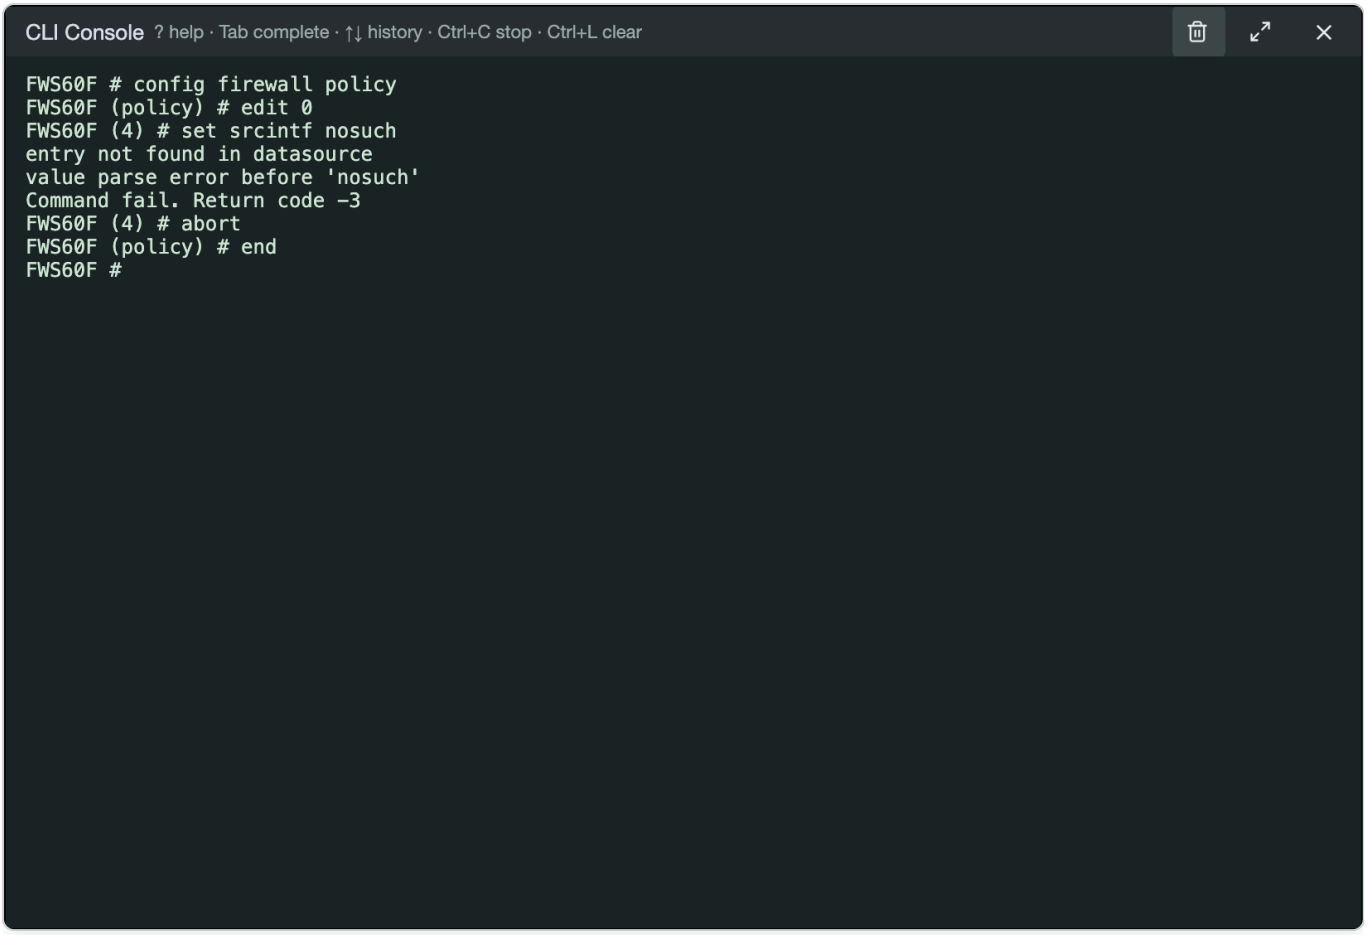
*Welcome*



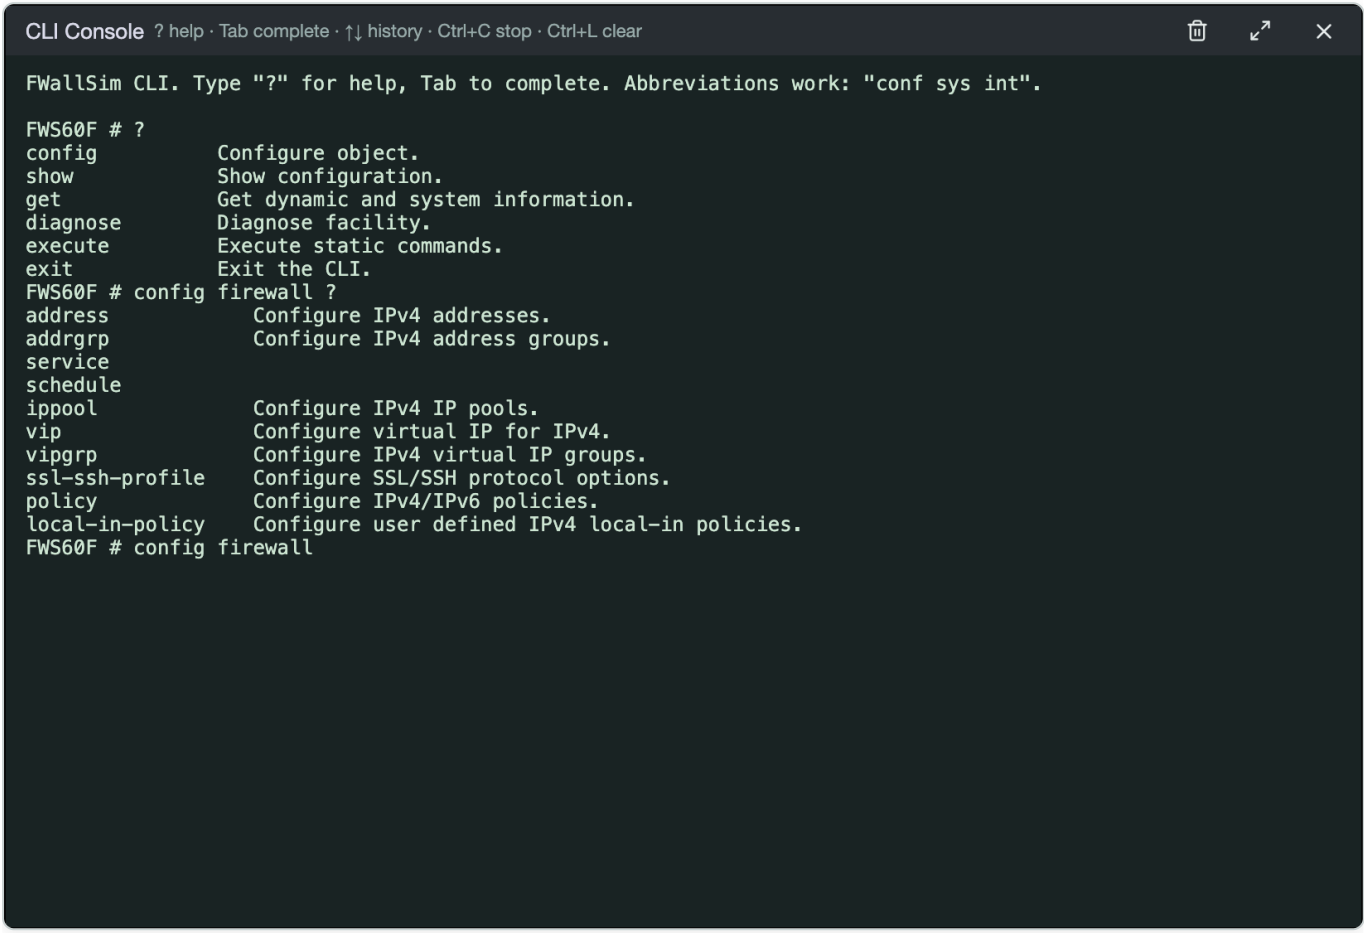

*Config Mode*




*Debug Flow*


CLI Console ? help · Tab complete · ↑↓ history · Ctrl+C stop · Ctrl+L clear
FWS60F # config firewall policy
FWS60F (policy) # edit 0
FWS60F (4) # set srcintf nosuch
entry not found in datasource
value parse error before 'nosuch'
Command fail. Return code -3
FWS60F (4) # abort
FWS60F (policy) # end
FWS60F #

*Errors*


CLI Console ? help · Tab complete · ↑↓ history · Ctrl+C stop · Ctrl+L clear
FWallSim CLI. Type "?" for help, Tab to complete. Abbreviations work: "conf sys int".
FWS60F # ?
config Configure object.
show Show configuration.
get Get dynamic and system information.
diagnose Diagnose facility.
execute Execute static commands.
exit Exit the CLI.
FWS60F # config firewall ?
address Configure IPv4 addresses.
addrgrp Configure IPv4 address groups.
service
schedule
ippool Configure IPv4 IP pools.
vip Configure virtual IP for IPv4.
vipgrp Configure IPv4 virtual IP groups.
ssl-ssh-profile Configure SSL/SSH protocol options.
policy Configure IPv4/IPv6 policies.
local-in-policy Configure user defined IPv4 local-in policies.
FWS60F # config firewall

*Help*

CLI Console ? help · Tab complete · ↑↓ history · Ctrl+C stop · Ctrl+L clear

```
                status: up
                speed: 1000Mbps (Duplex: full)
                FEC: none
                FEC_cap: none
        ==[internal2]
                mode: static
                ip: 0.0.0.0 0.0.0.0
                ipv6: ::/0
                status: up
                speed: 1000Mbps (Duplex: full)
                FEC: none
                FEC_cap: none
        ==[internal3]
                mode: static
                ip: 0.0.0.0 0.0.0.0
                ipv6: ::/0
                status: down
                speed: n/a
                FEC: none
                FEC_cap: none
        ==[internal4]
                mode: static
                ip: 0.0.0.0 0.0.0.0
                ipv6: ::/0
                status: down
                speed: n/a
                FEC: none
                FEC_cap: none
        ==[internal5]
                mode: static
                ip: 0.0.0.0 0.0.0.0
                ipv6: ::/0
                status: down
                speed: n/a
                FEC: none
                FEC_cap: none
FWS60F #
```

*Show Get*

CLI Console ? help · Tab complete · ↑↓ history · Ctrl+C stop · Ctrl+L clear

```
FWS60F # diagnose debug disable
FWS60F # diagnose sniffer packet any "host 8.8.8.8" 4
Using Original Sniffing Mode
interfaces=[any]
filters=[host 8.8.8.8]
(Send traffic from the Lab panel. Press Ctrl+C to stop.)
0.060444 internal in 192.168.1.110 -> 8.8.8.8: icmp: echo request
0.060592 wan1 out 203.0.113.10 -> 8.8.8.8: icmp: echo request
0.069375 wan1 in 8.8.8.8 -> 203.0.113.10: icmp: echo reply
0.069806 internal out 8.8.8.8 -> 192.168.1.110: icmp: echo reply
^C

4 packets received by filter
0 packets dropped by kernel

FWS60F #
```

*Sniffer*

**Next:** Class 2: Your first firewall policy: LAN to Internet