F FWallSim · Firewall Course

CLASS 2

Your first firewall policy: LAN to Internet

Firewall policy, NAT, implicit deny

Beginner | ~15 minutes | FWallSim v1.1.0 (FortiOS 7.4 style)


YOU WILL LEARN

- Firewall policy
- NAT
- implicit deny

BEFORE YOU START

Finish Class 1 first.

The lab network

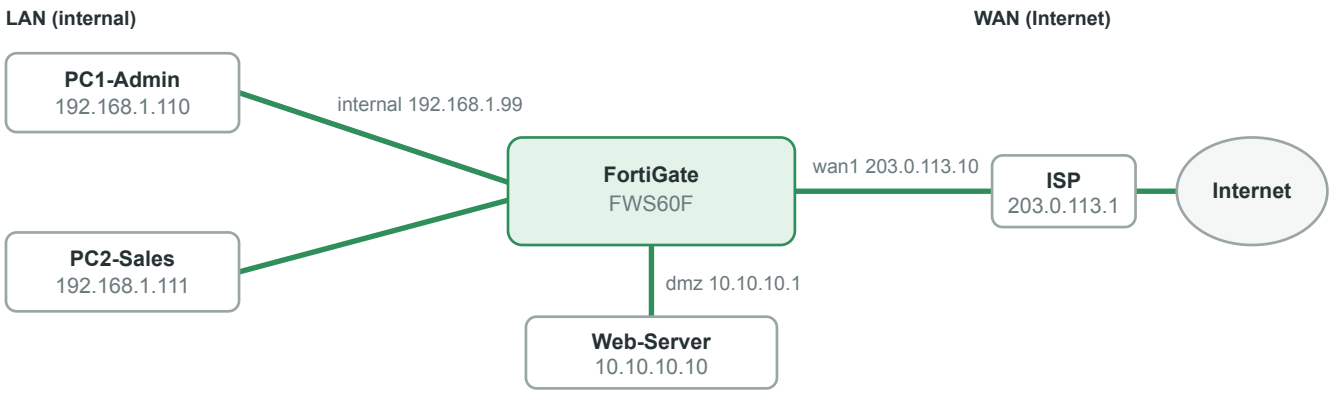

The goal

THE IDEA

A new FortiGate blocks everything through it (the Implicit Deny). Build the policy that lets the office reach the internet, with source NAT so replies can come back.

How to start

1. Open FWallSim and log in.
2. Click **Labs** in the header.
3. Find **Your first firewall policy: LAN to Internet** and click **Start**.
4. The Lab Guide panel opens. Each task below gets a green tick as soon as it works.

Tasks

1. **Create an ACCEPT policy from internal to wan1**

   Policy & Objects > Firewall Policy > Create New. Incoming internal, Outgoing wan1, Source all, Destination all, Schedule always, Service ALL, Action ACCEPT.

2. **NAT is on for that policy**

   In the same policy, Firewall / Network Options > NAT is on by default for a new policy: make sure it stays on (Use Outgoing Interface Address).

3. **PC1 can ping 8.8.8.8**


   In the Lab panel, open Traffic Generator and click the quick test "PC1 pings 8.8.8.8" (or send PC1-Admin → 8.8.8.8, Ping). The tick appears once the test succeeds. Look at the Source NAT step in the Packet Walk.

4. **PC1 can browse www.example.com**


   Traffic Generator: click the quick test "PC1 browses www.example.com" (PC1-Admin → www.example.com, HTTPS). This needs DNS first. The Packet Walk shows the DNS query too.

Screenshots


Numbered red markers show where to click or what to look at.

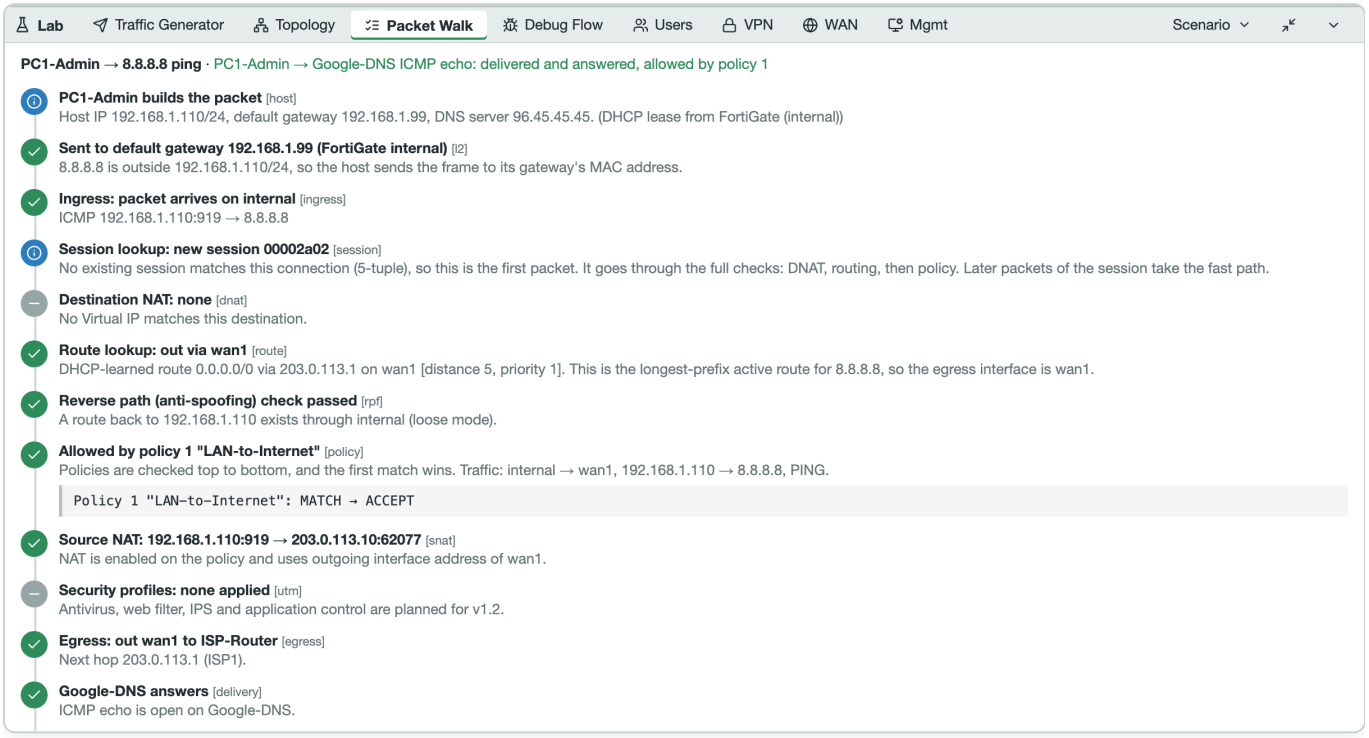


Allowed Walk

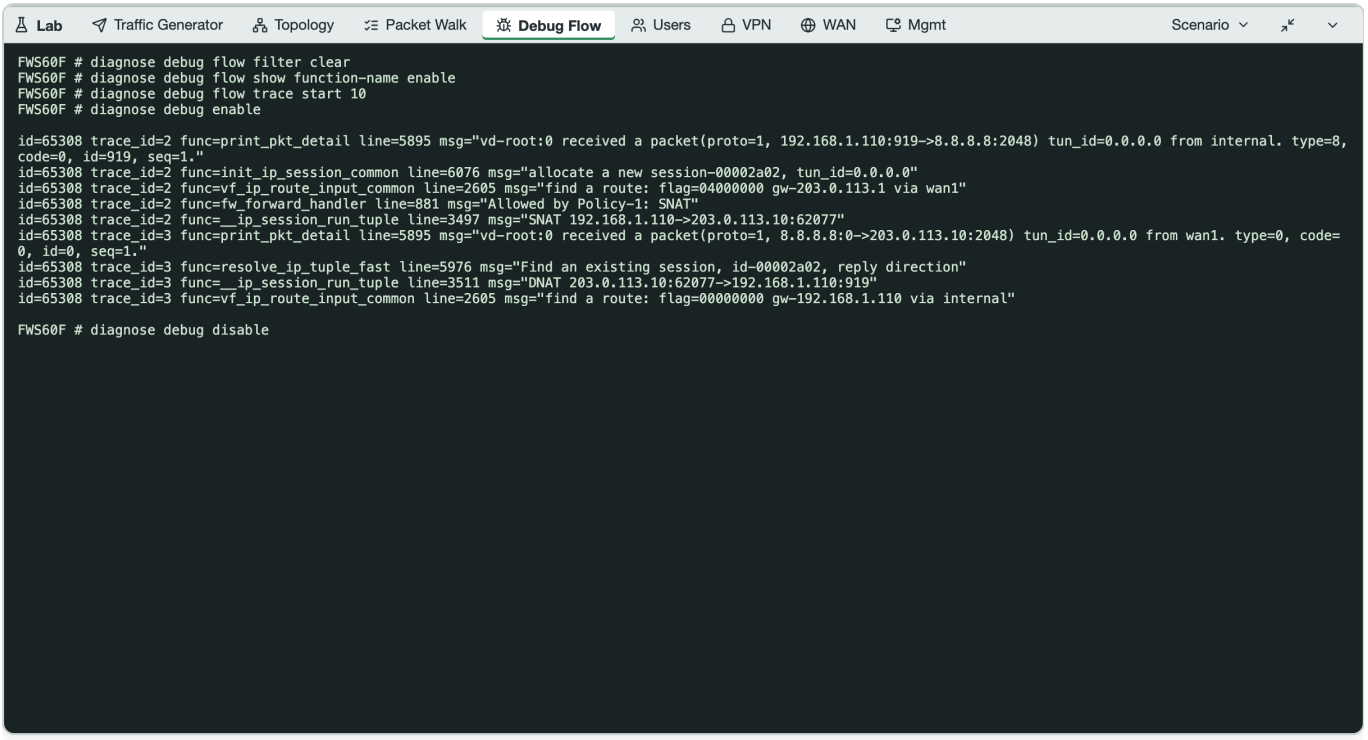


Debug Flow

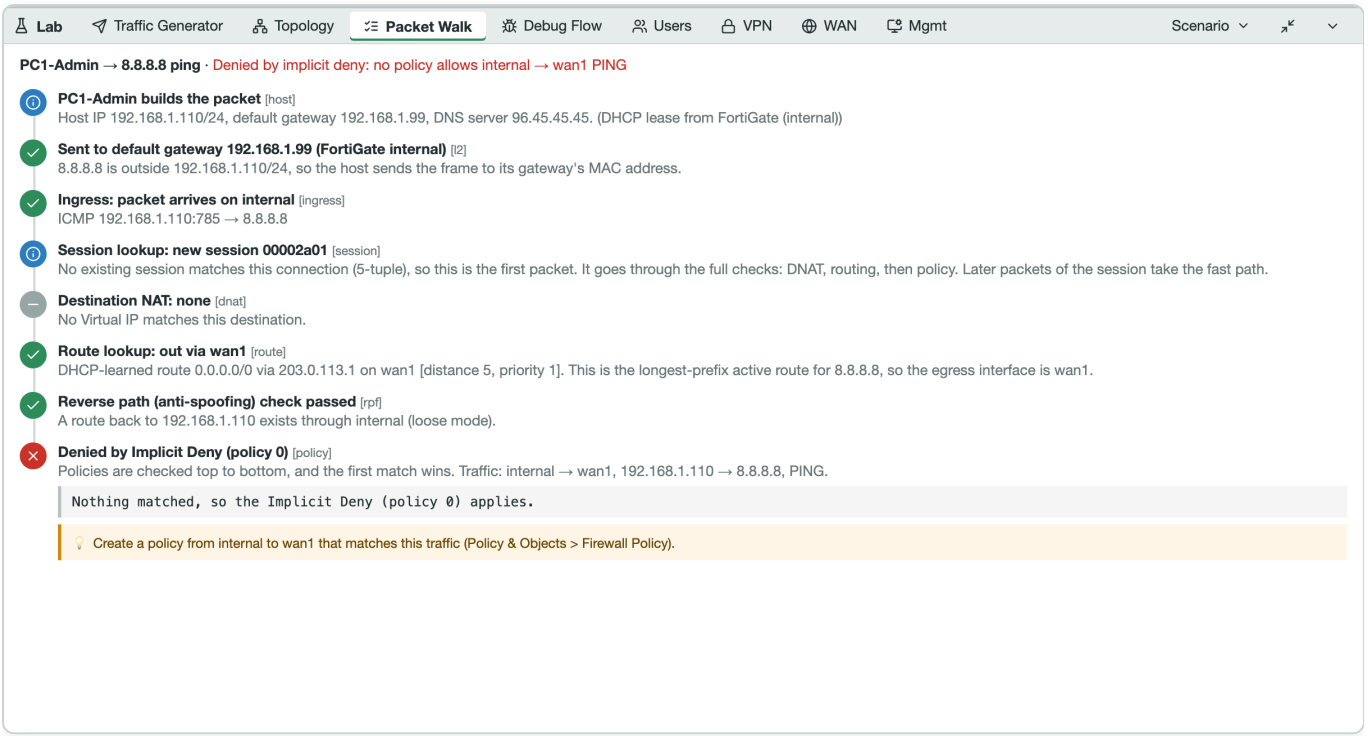


Denied Walk

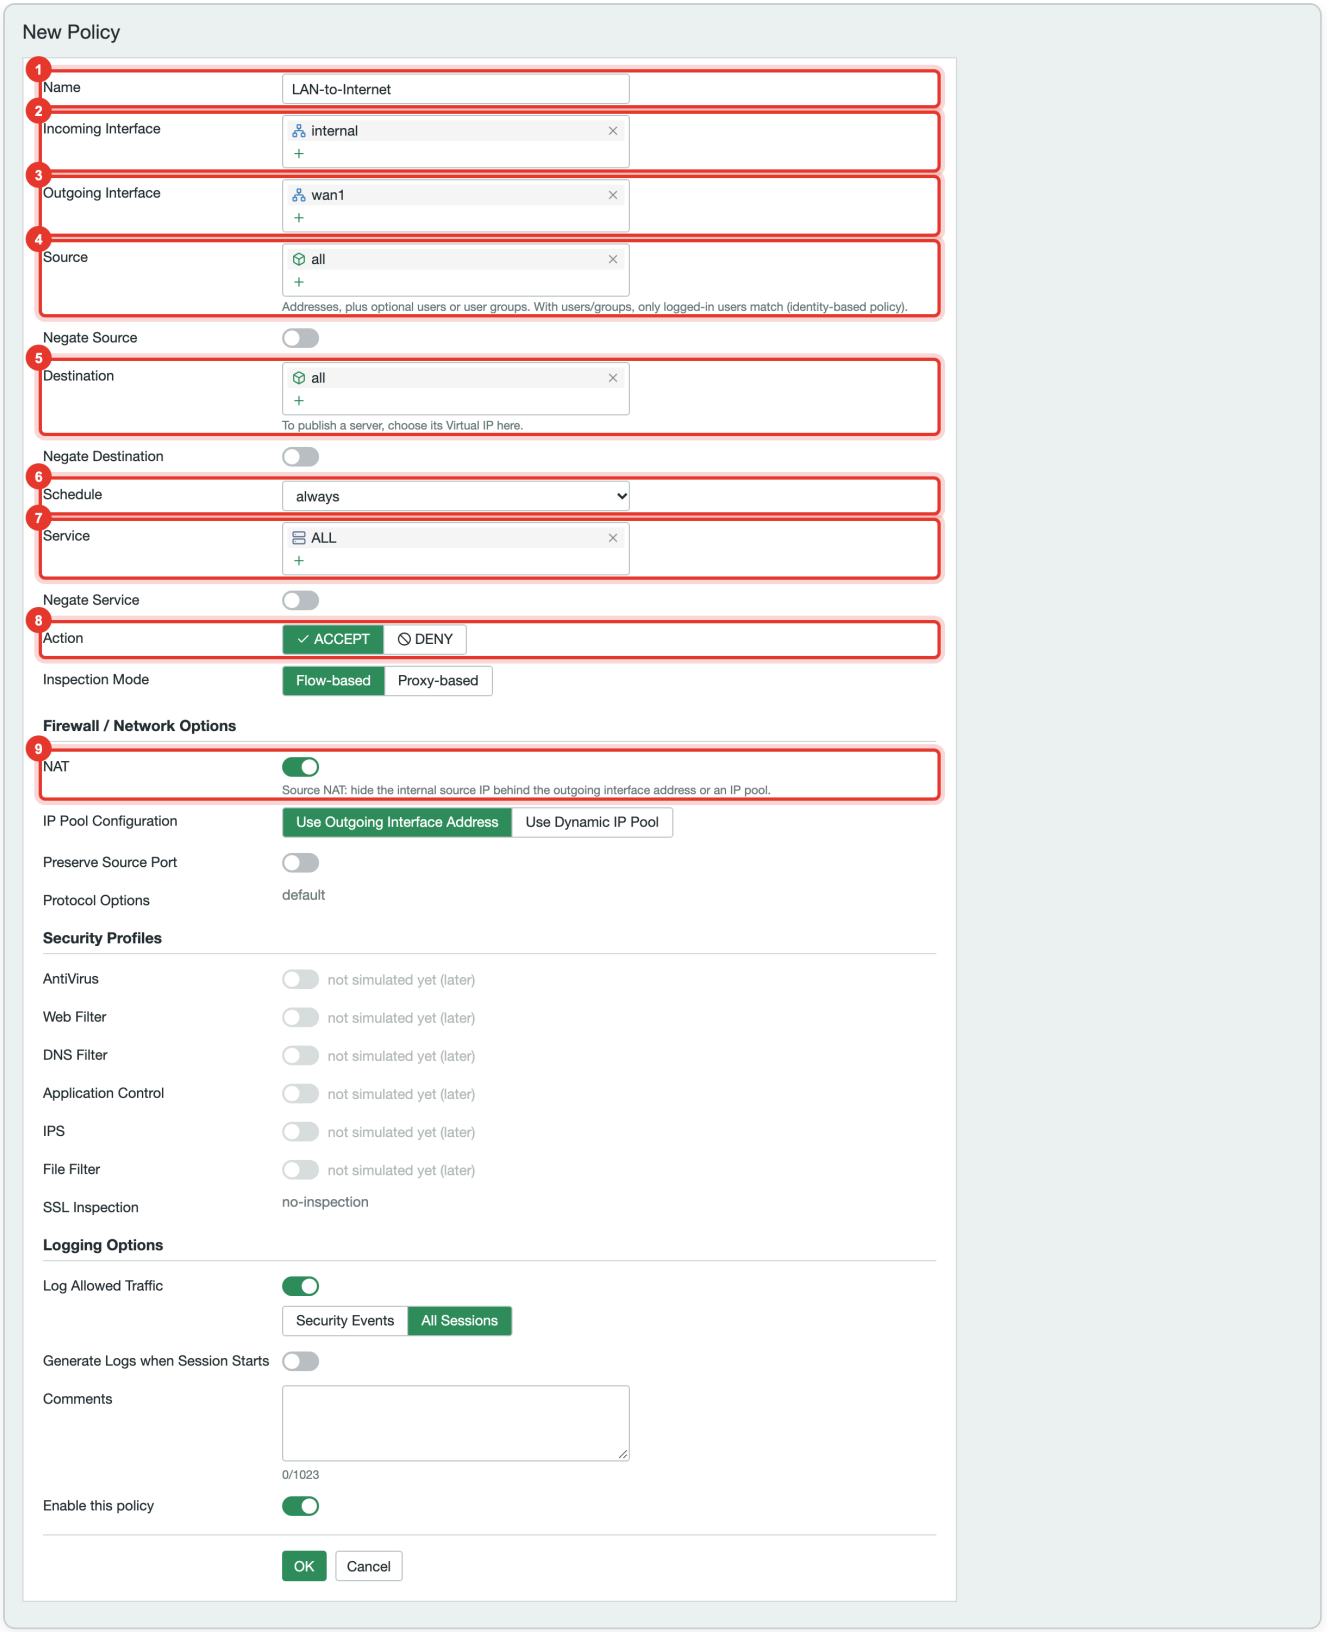
New Policy
1
Name
LAN-to-Internet
2
Incoming Interface
internal
3
Outgoing Interface
wan1
4
Source
all
Addresses, plus optional users or user groups. With users/groups, only logged-in users match (identity-based policy).
Negate Source
5
Destination
all
To publish a server, choose its Virtual IP here.
Negate Destination
6
Schedule
always
7
Service
ALL
Negate Service
8
Action
ACCEPT
DENY
Inspection Mode
Flow-based
Proxy-based
Firewall / Network Options
9
NAT
Source NAT: hide the internal source IP behind the outgoing interface address or an IP pool.
IP Pool Configuration
Use Outgoing Interface Address
Use Dynamic IP Pool
Preserve Source Port
Protocol Options
default
Security Profiles
AntiVirus
not simulated yet (later)
Web Filter
not simulated yet (later)
DNS Filter
not simulated yet (later)
Application Control
not simulated yet (later)
IPS
not simulated yet (later)
File Filter
not simulated yet (later)
SSL Inspection
no-inspection
Logging Options
Log Allowed Traffic
Security Events
All Sessions
Generate Logs when Session Starts
Comments
0/1023
Enable this policy
OK
Cancel


New Policy

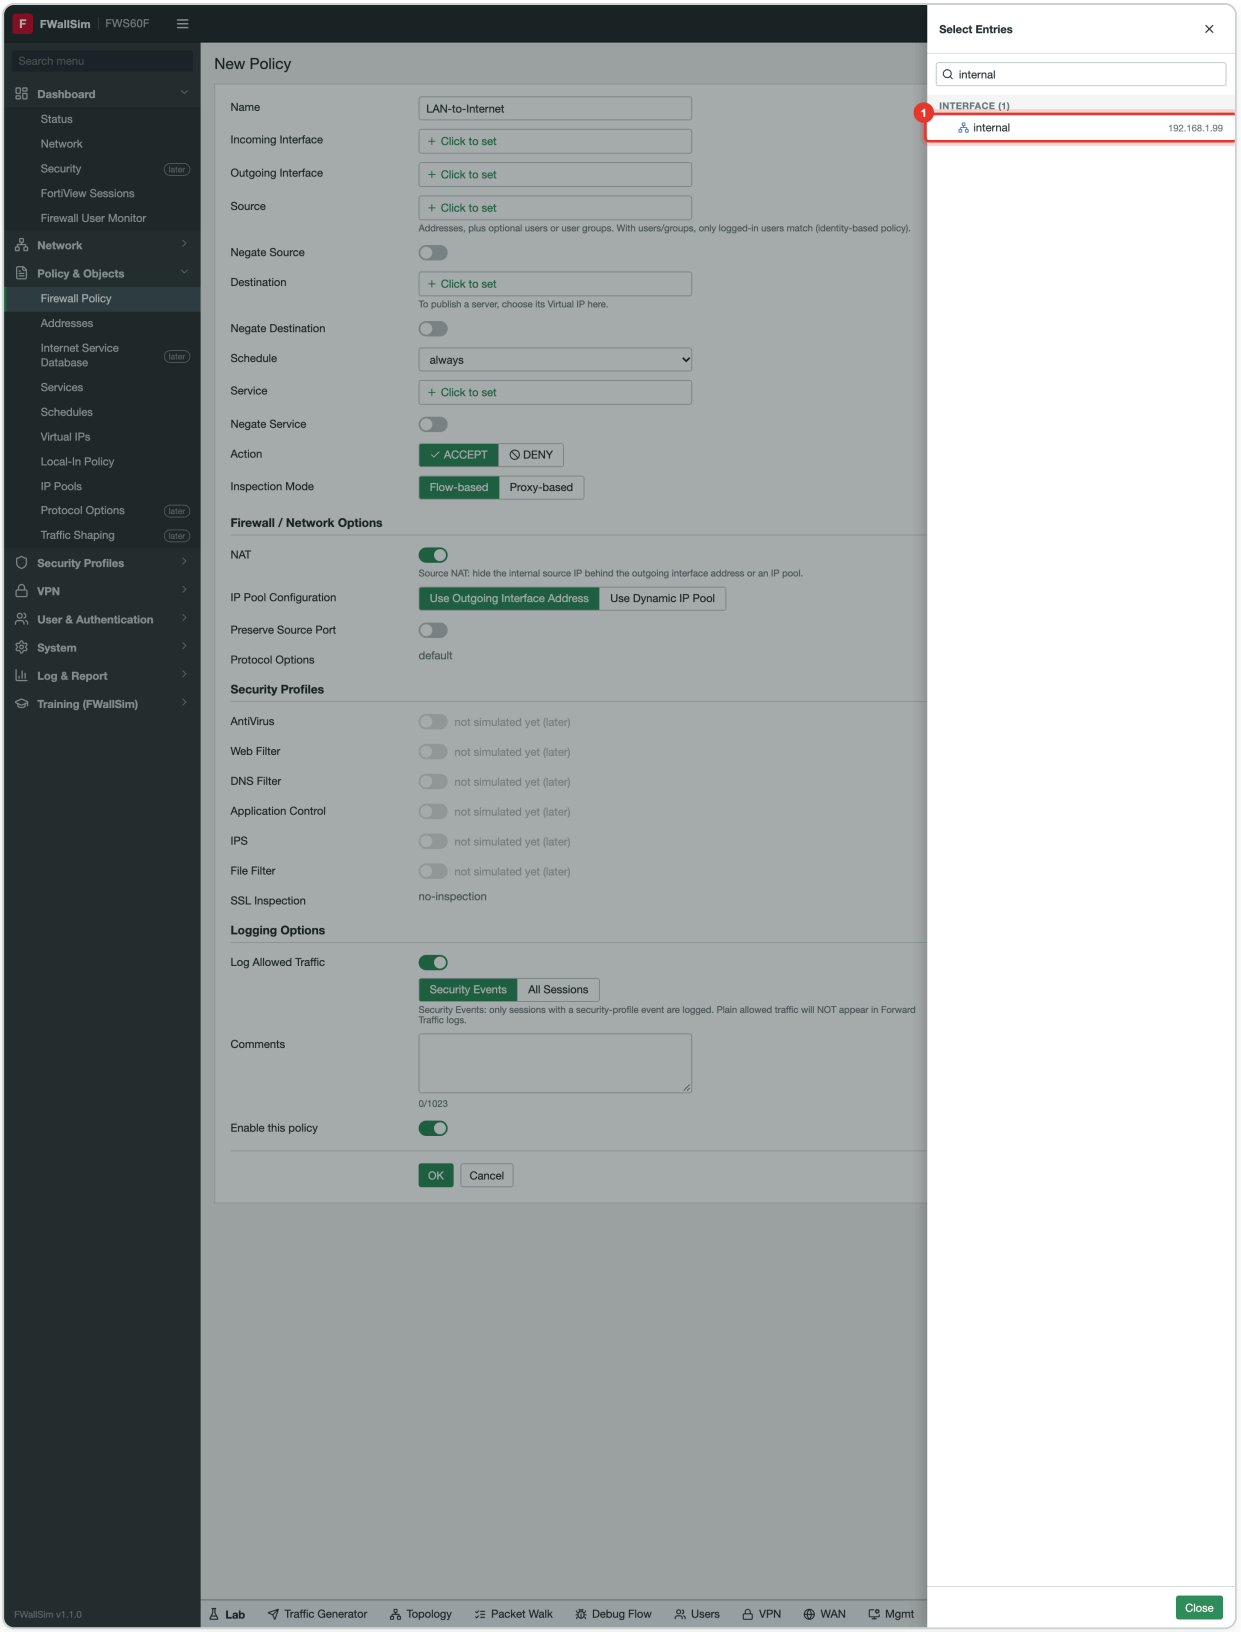

Picker Drawer

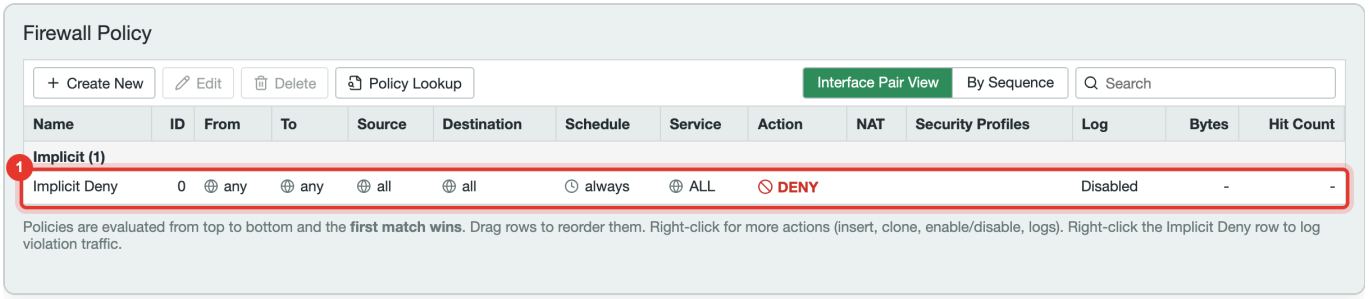

Policy Empty

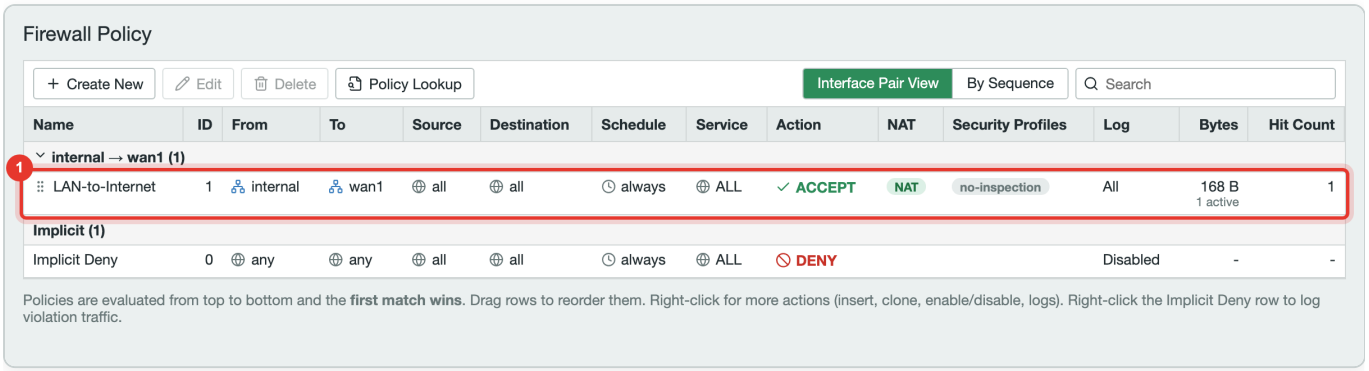

Policy List

Next: Class 3: Logs: seeing what the firewall did