F FWallSim · Firewall Course

CLASS 7

Change the LAN subnet

Interfaces, DHCP server, address objects

Intermediate | ~20 minutes | FWallSim v1.1.0 (FortiOS 7.4 style)


YOU WILL LEARN

- Interfaces
- DHCP server
- address objects

BEFORE YOU START

Finish Class 6 first.

The lab network

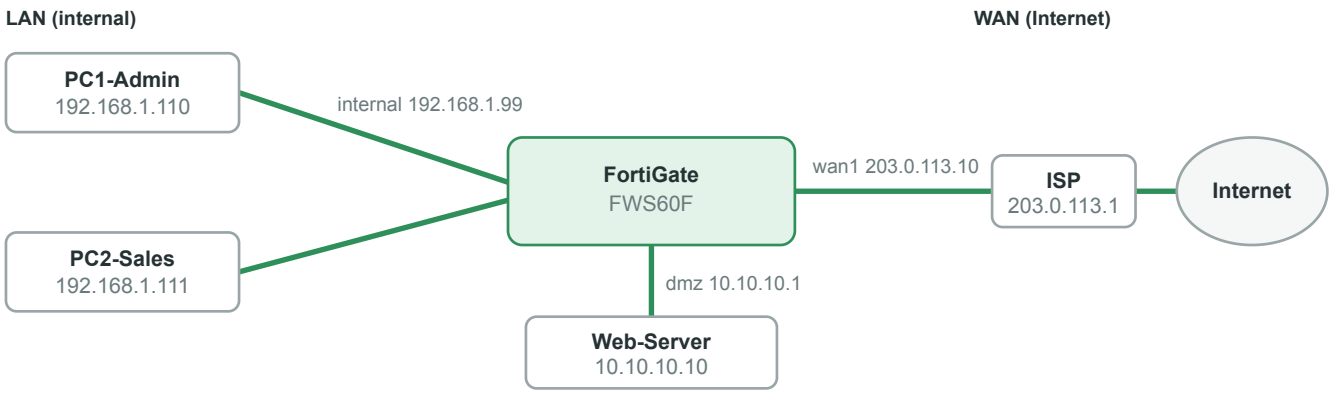

The goal

THE IDEA

Management wants the office LAN moved to 192.168.10.0/24, with the FortiGate at 192.168.10.1. Everything must keep working.

How to start

1. Open FWallSim and log in.
2. Click **Labs** in the header.
3. Find **Change the LAN subnet** and click **Start**.
4. The Lab Guide panel opens. Each task below gets a green tick as soon as it works.

Tasks

1. **internal is 192.168.10.1/24**

   Network > Interfaces > edit internal > IP/Netmask.

2. **The DHCP server hands out 192.168.10.x addresses**


   Same page: DHCP Server address range, e.g. 192.168.10.100 - 192.168.10.200.

3. **PC1 can browse www.example.com again**


   Hint: the policy source is the address object LAN-Subnet, which still says 192.168.1.0/24. Objects must follow the renumbering. Then test it: Traffic Generator quick test "PC1 browses www.example.com" (PC1-Admin → www.example.com, HTTPS).

Screenshots


Numbered red markers show where to click or what to look at.

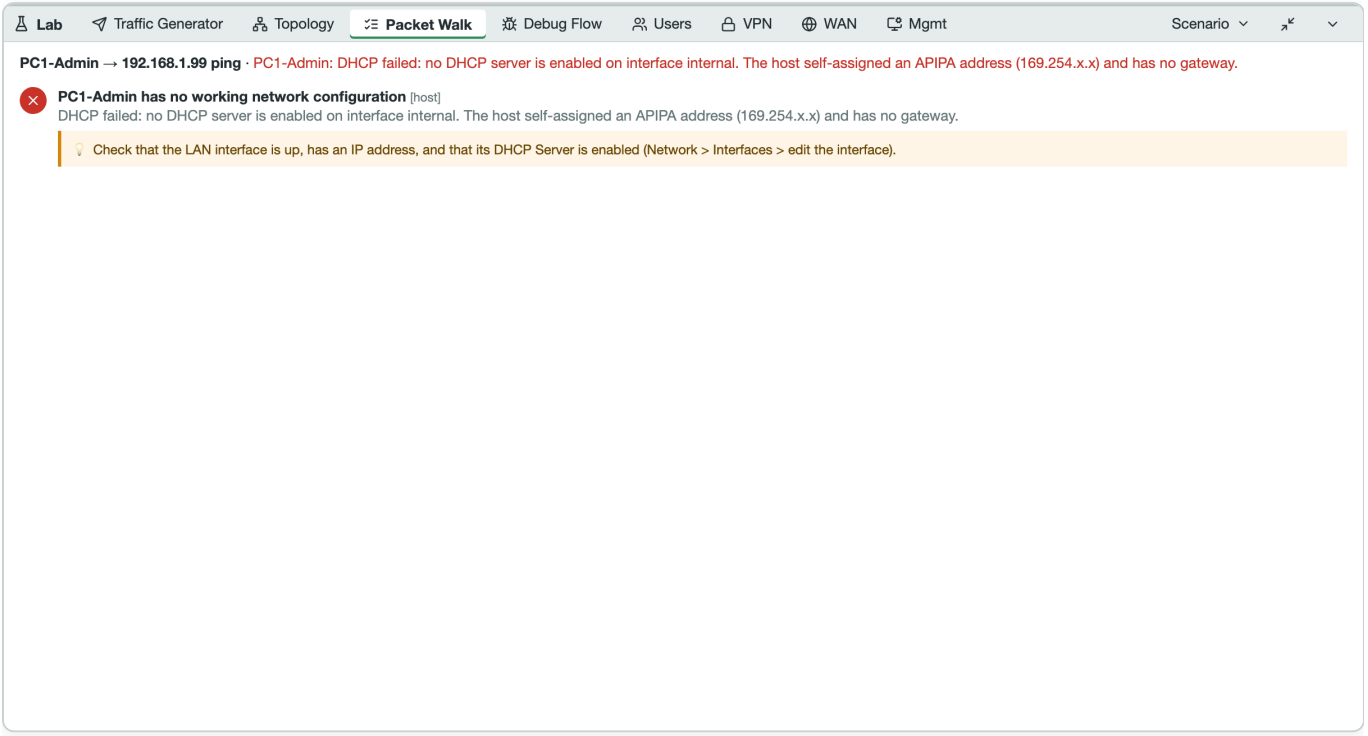


APIPA Walk

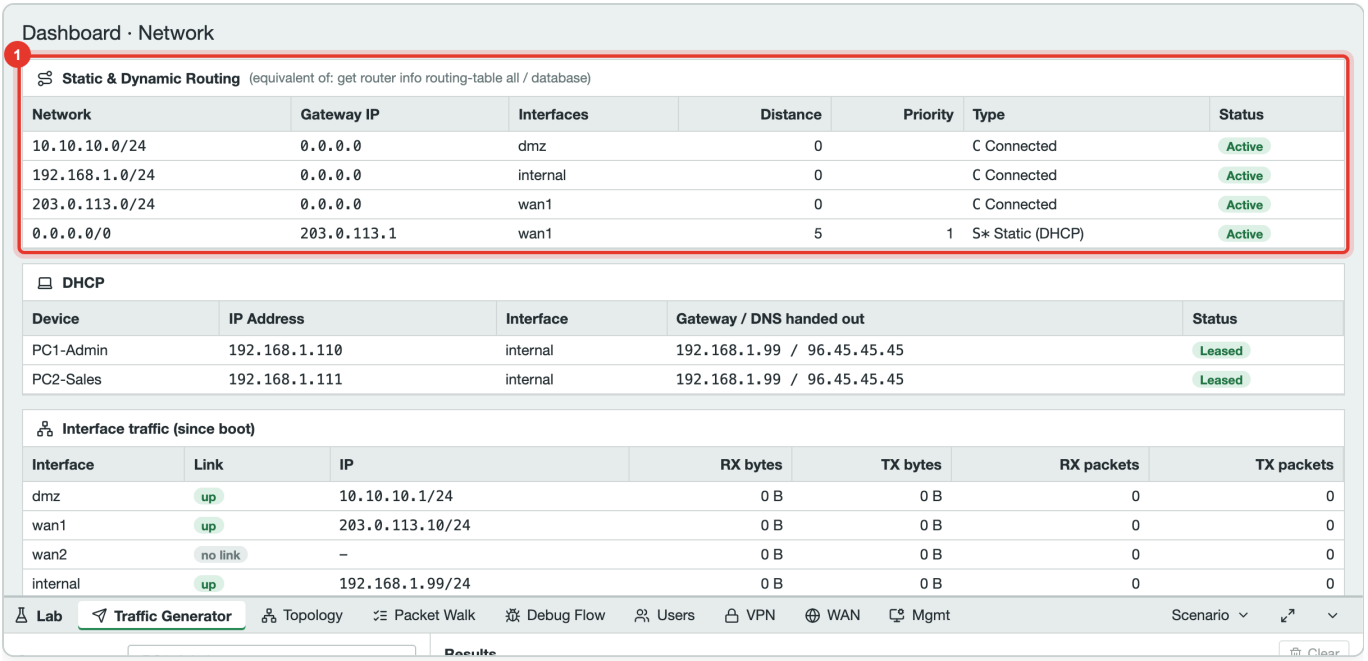


DHCP Leases

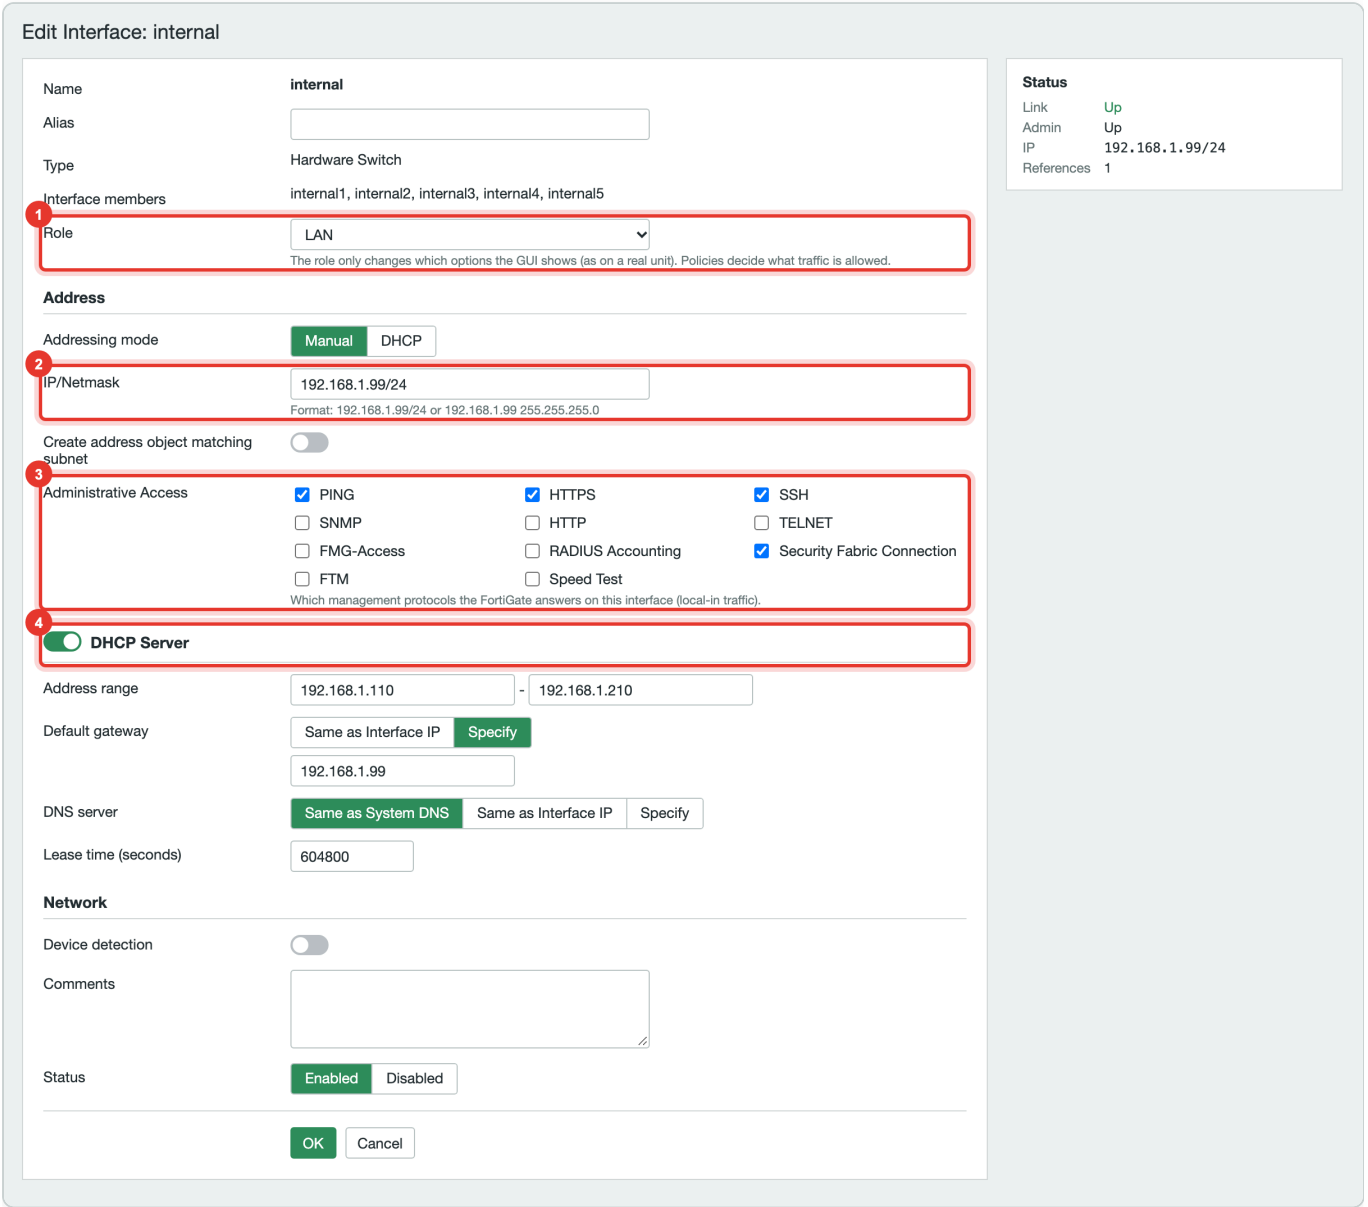


Edit Internal

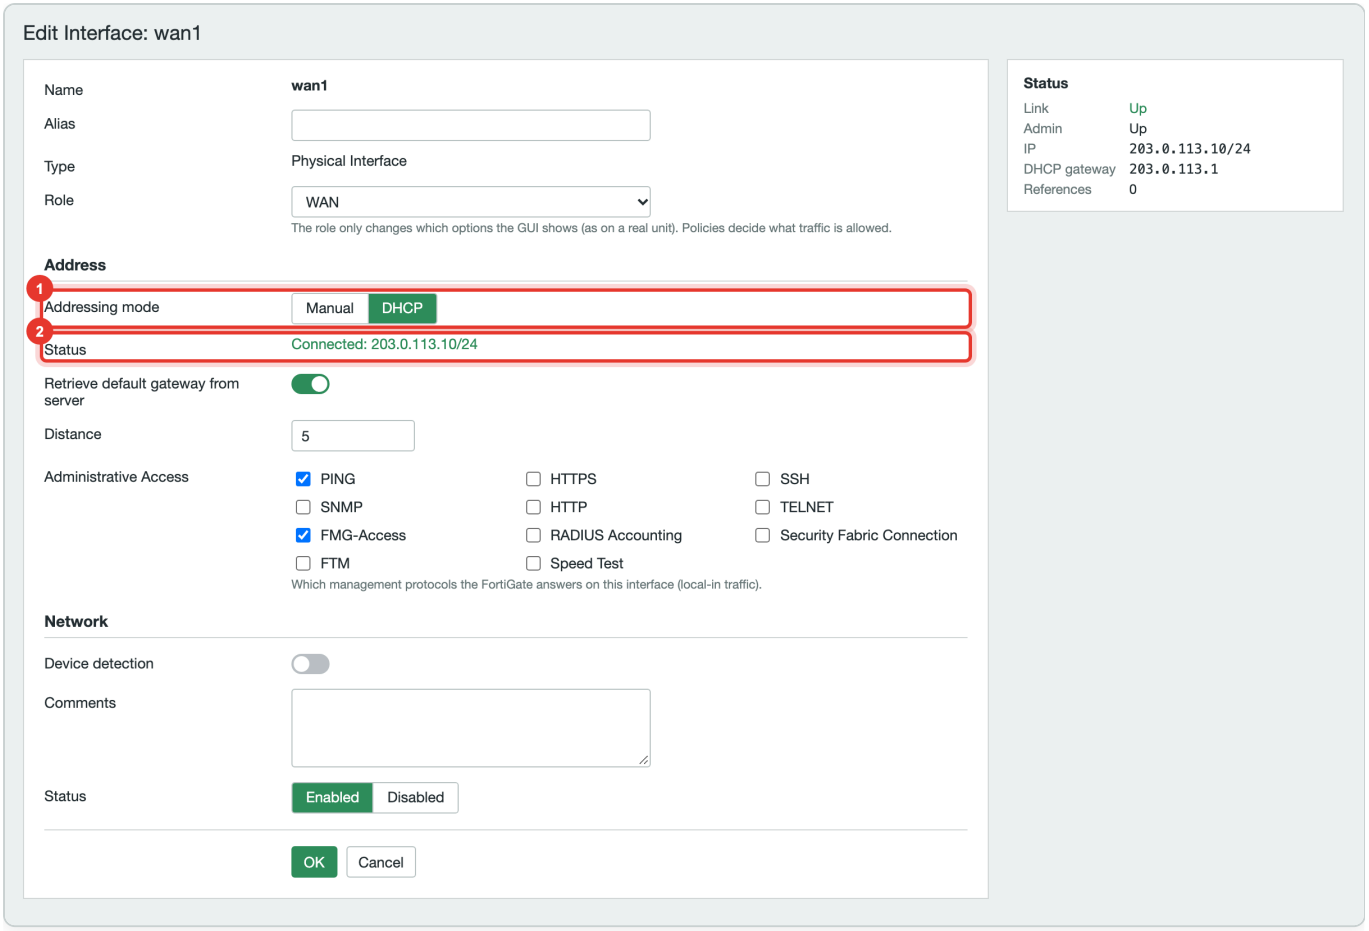

Edit wan1

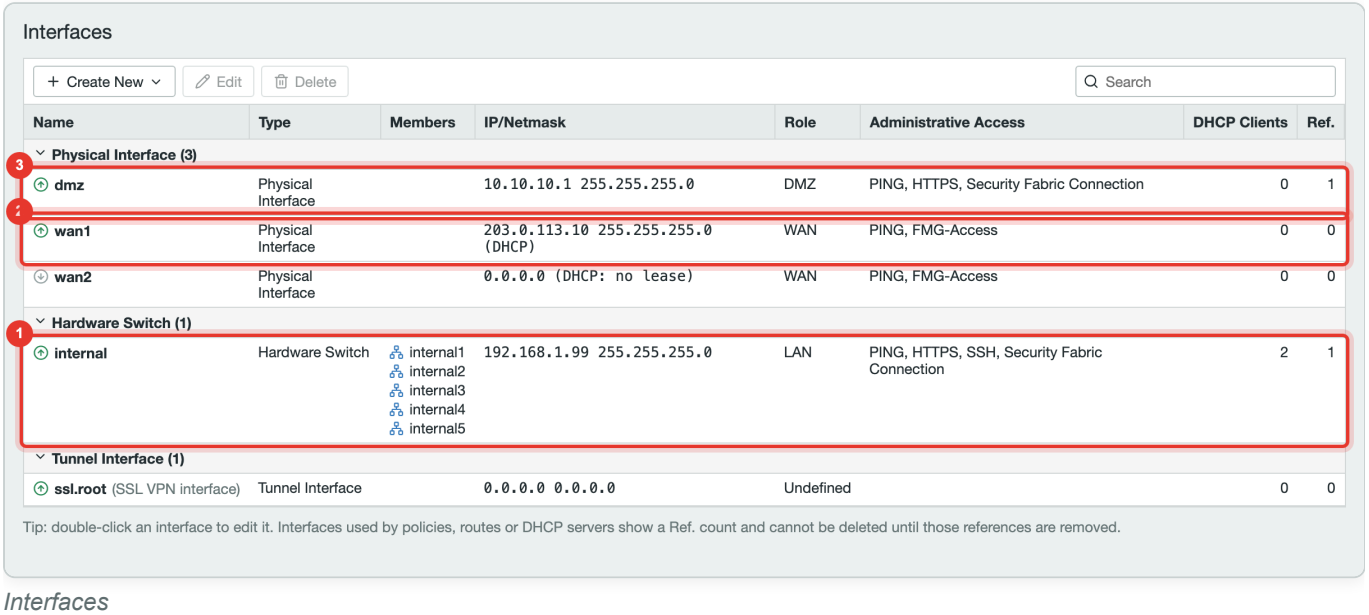

Interfaces

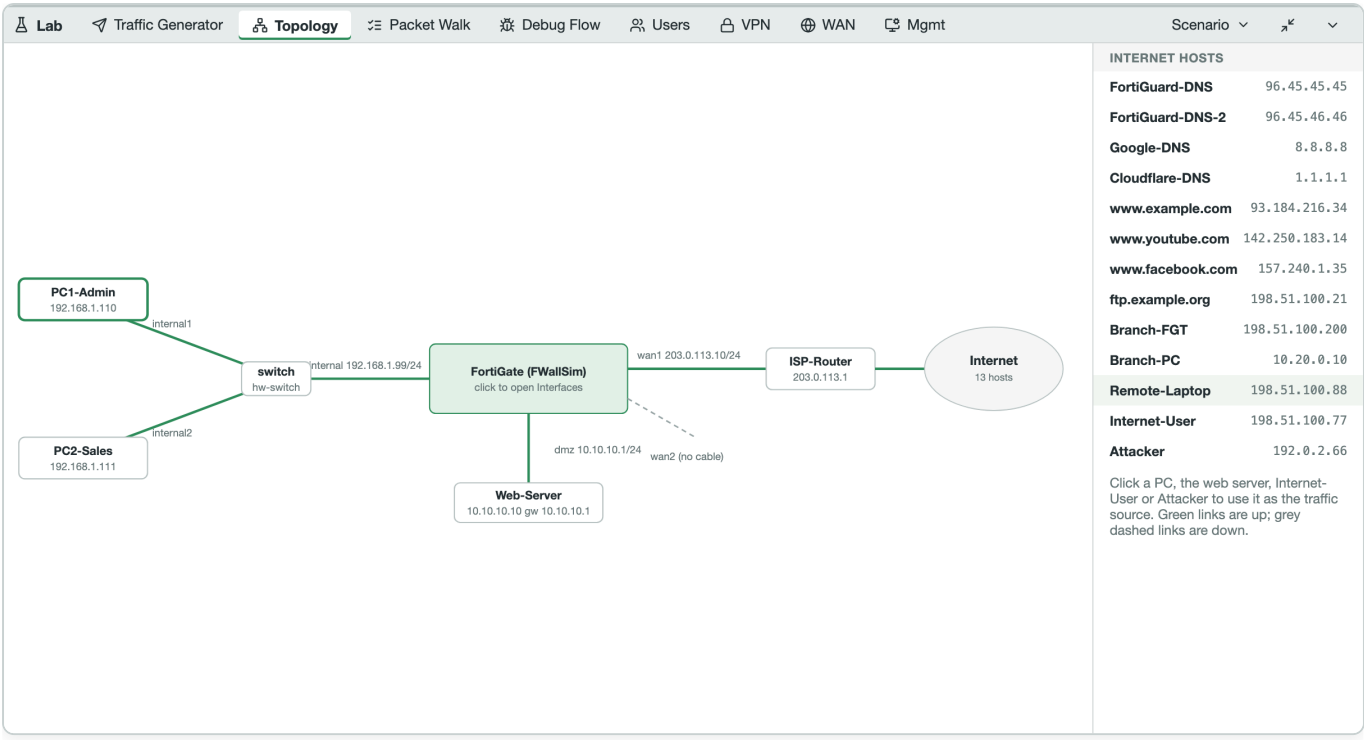

Topology

Next: Class 8: Harden administrative access