


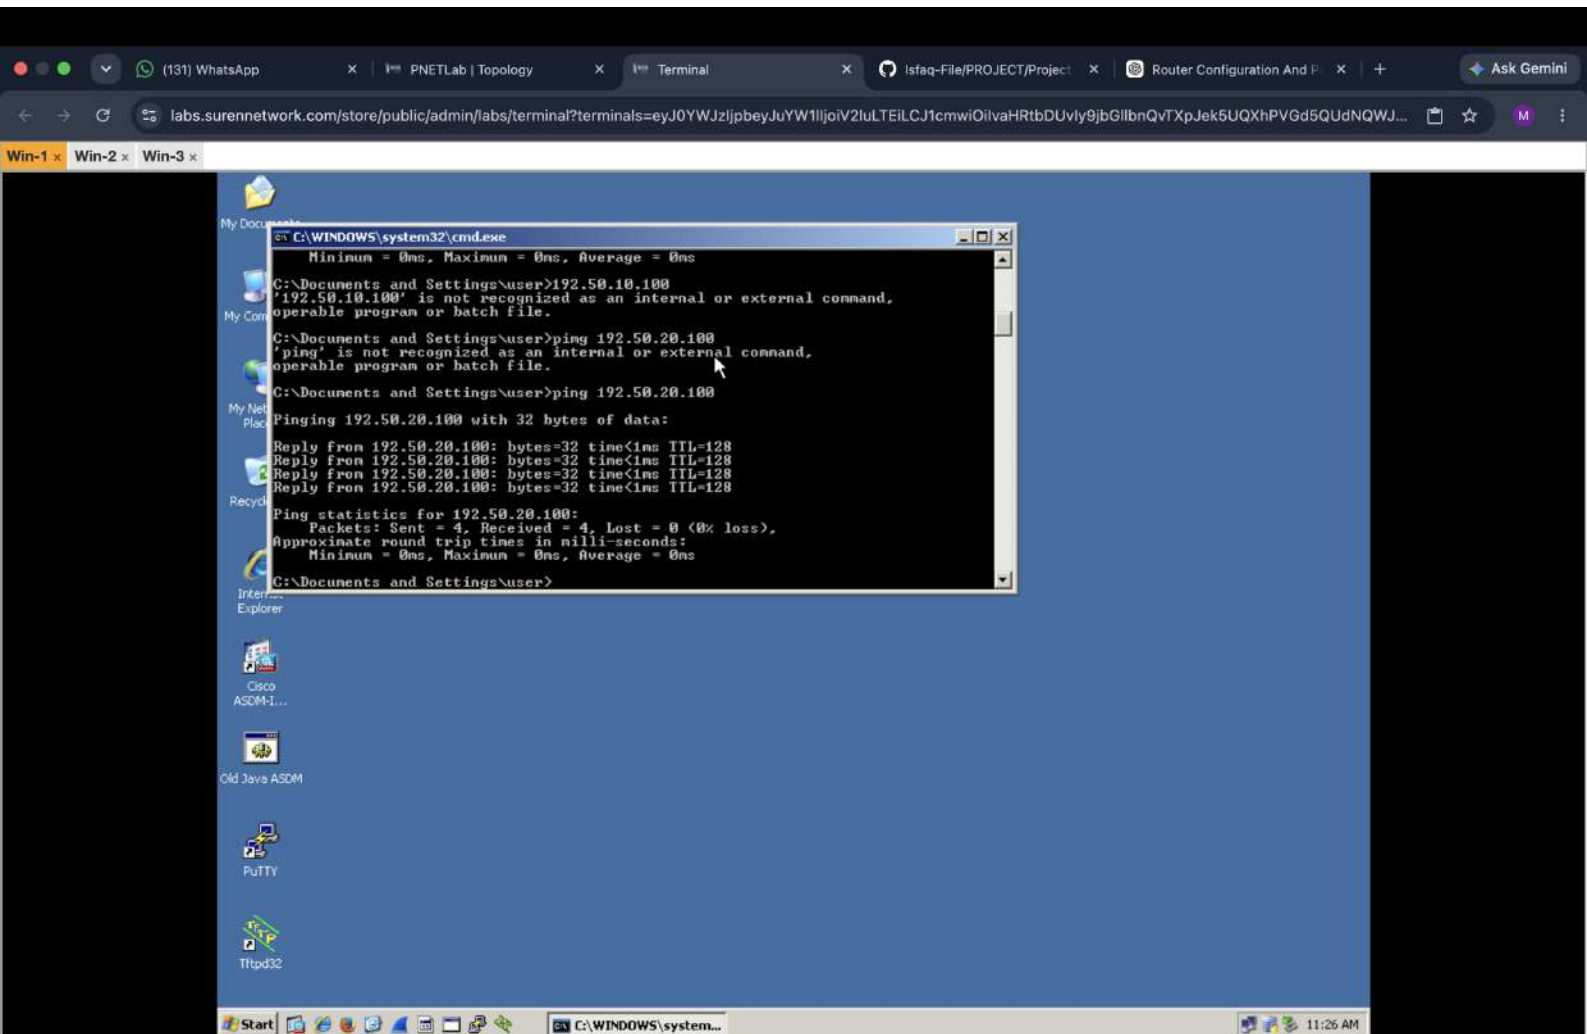

```
R2#
R2#
R2#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

  12.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
    C       12.0.0.0/8 is directly connected, Ethernet0/0
    L       12.0.0.2/32 is directly connected, Ethernet0/0
  26.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
    C       26.0.0.0/8 is directly connected, Ethernet0/1
    L       26.0.0.1/32 is directly connected, Ethernet0/1
    S       192.50.20.0/24 [1/0] via 12.0.0.1
    S       223.0.50.0/24 [1/0] via 26.0.0.2
R2#
```

```
Win-1 x Win-2 x Win-3 x R1 x R2 x
labs.surenetwork.com/store/public/admin/labs/terminal?terminals=eyJ0YWJzljpbeyJuYW1lIjo1V2luLTEiLCJ1cmwiOiIvaHRtbDUvly9jbGllbnQvTXpJek5UQXhPVGd5QUdNQWJ...
Ask Gemini

R1#
R1#show ip route
^
% Invalid input detected at '^' marker.

R1#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

12.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 12.0.0.0/8 is directly connected, Ethernet0/1
L 12.0.0.1/32 is directly connected, Ethernet0/1
S 23.0.0.0/8 [1/0] via 12.0.0.2
S 24.0.0.0/8 [1/0] via 12.0.0.2
S 26.0.0.0/8 [1/0] via 12.0.0.2
S 32.0.0.0/8 [1/0] via 12.0.0.2
S 45.0.0.0/8 [1/0] via 12.0.0.2
S 172.36.0.0/16 [1/0] via 12.0.0.2
S 192.50.20.0/24 is variably subnetted, 2 subnets, 2 masks
--More--
```

```
Win-1 x Win-3 x R1 x R2 x R6 x
R6#
R6#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2
        i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
        ia - IS-IS inter area, * - candidate default, U - per-user static route
        o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
        a - application route
        + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S    12.0.0.0/8 [1/0] via 26.0.0.1
S    23.0.0.0/8 [1/0] via 26.0.0.1
S    24.0.0.0/8 [1/0] via 26.0.0.1
S    26.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        26.0.0.0/8 is directly connected, Ethernet0/1
L        26.0.0.2/32 is directly connected, Ethernet0/1
S    32.0.0.0/8 [1/0] via 26.0.0.1
S    45.0.0.0/8 [1/0] via 26.0.0.1
S    172.36.0.0/16 [1/0] via 26.0.0.1
S    192.50.20.0/24 [1/0] via 26.0.0.1
--More--
```

```
Win-1 x Win-3 x R1 x R2 x R6 x R4 x
R4#
R4#
R4#
R4#show p route
^
% Invalid input detected at '^' marker.
R4#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2
        i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
        ia - IS-IS inter area, * - candidate default, U - per-user static route
        o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
        a - application route
        + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S    12.0.0.0/8 [1/0] via 24.0.0.1
S    23.0.0.0/8 [1/0] via 24.0.0.1
    24.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        24.0.0.0/8 is directly connected, Ethernet0/0
L        24.0.0.2/32 is directly connected, Ethernet0/0
S    26.0.0.0/8 [1/0] via 24.0.0.1
S    32.0.0.0/8 [1/0] via 45.0.0.2
    45.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        45.0.0.0/8 is directly connected, Ethernet0/1
L        45.0.0.1/32 is directly connected, Ethernet0/1
--More--
```

Win-1 x R5 x

```
R5#
R5#
R5#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S    12.0.0.0/8 [1/0] via 32.0.0.1
S    23.0.0.0/8 [1/0] via 32.0.0.1
S    24.0.0.0/8 [1/0] via 45.0.0.1
S    26.0.0.0/8 [1/0] via 45.0.0.1
S    32.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C      32.0.0.0/8 is directly connected, Ethernet0/1
L      32.0.0.2/32 is directly connected, Ethernet0/1
C      45.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C      45.0.0.0/8 is directly connected, Ethernet0/2
L      45.0.0.2/32 is directly connected, Ethernet0/2
--More--
```