






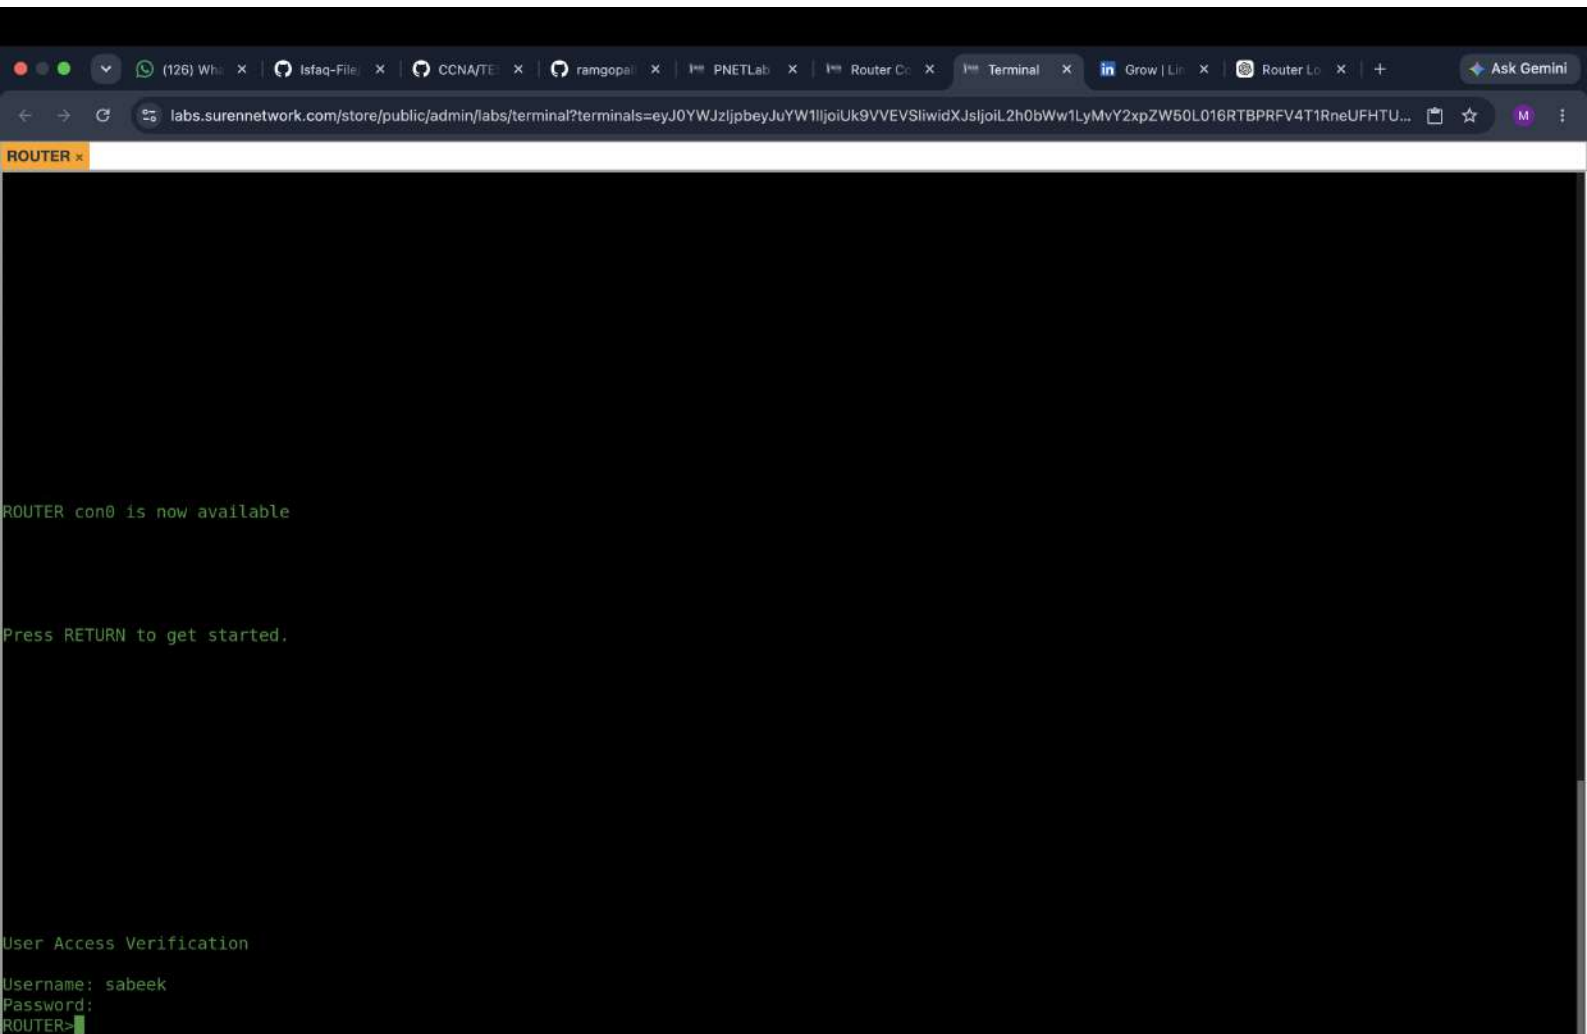

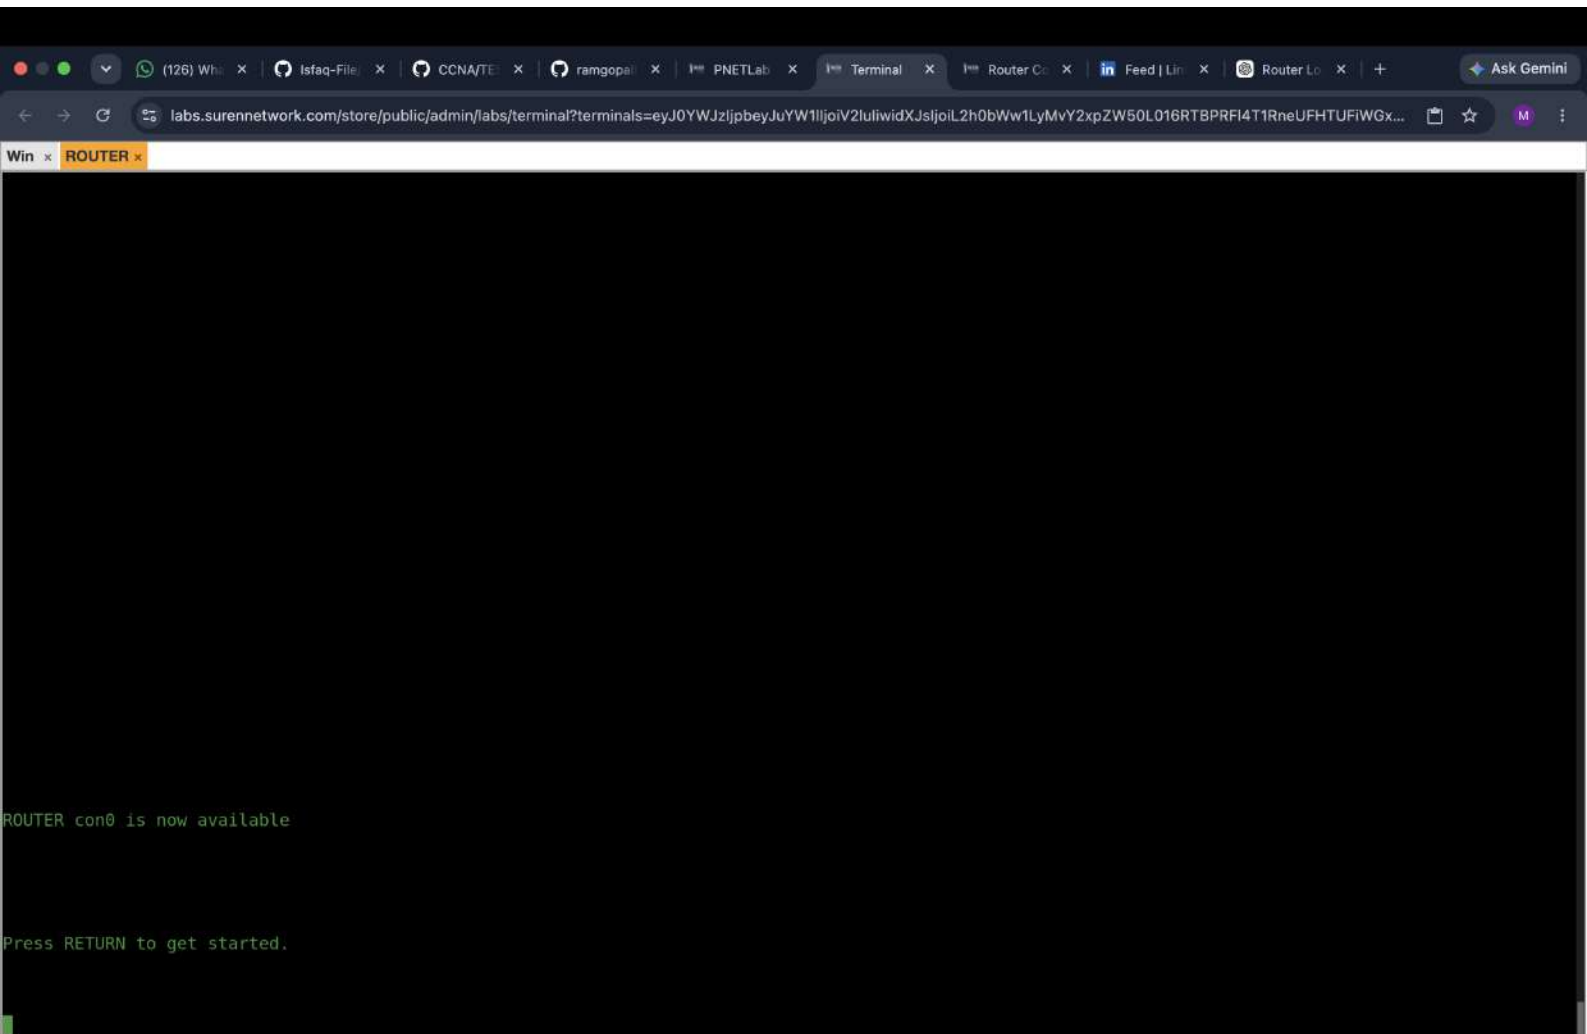

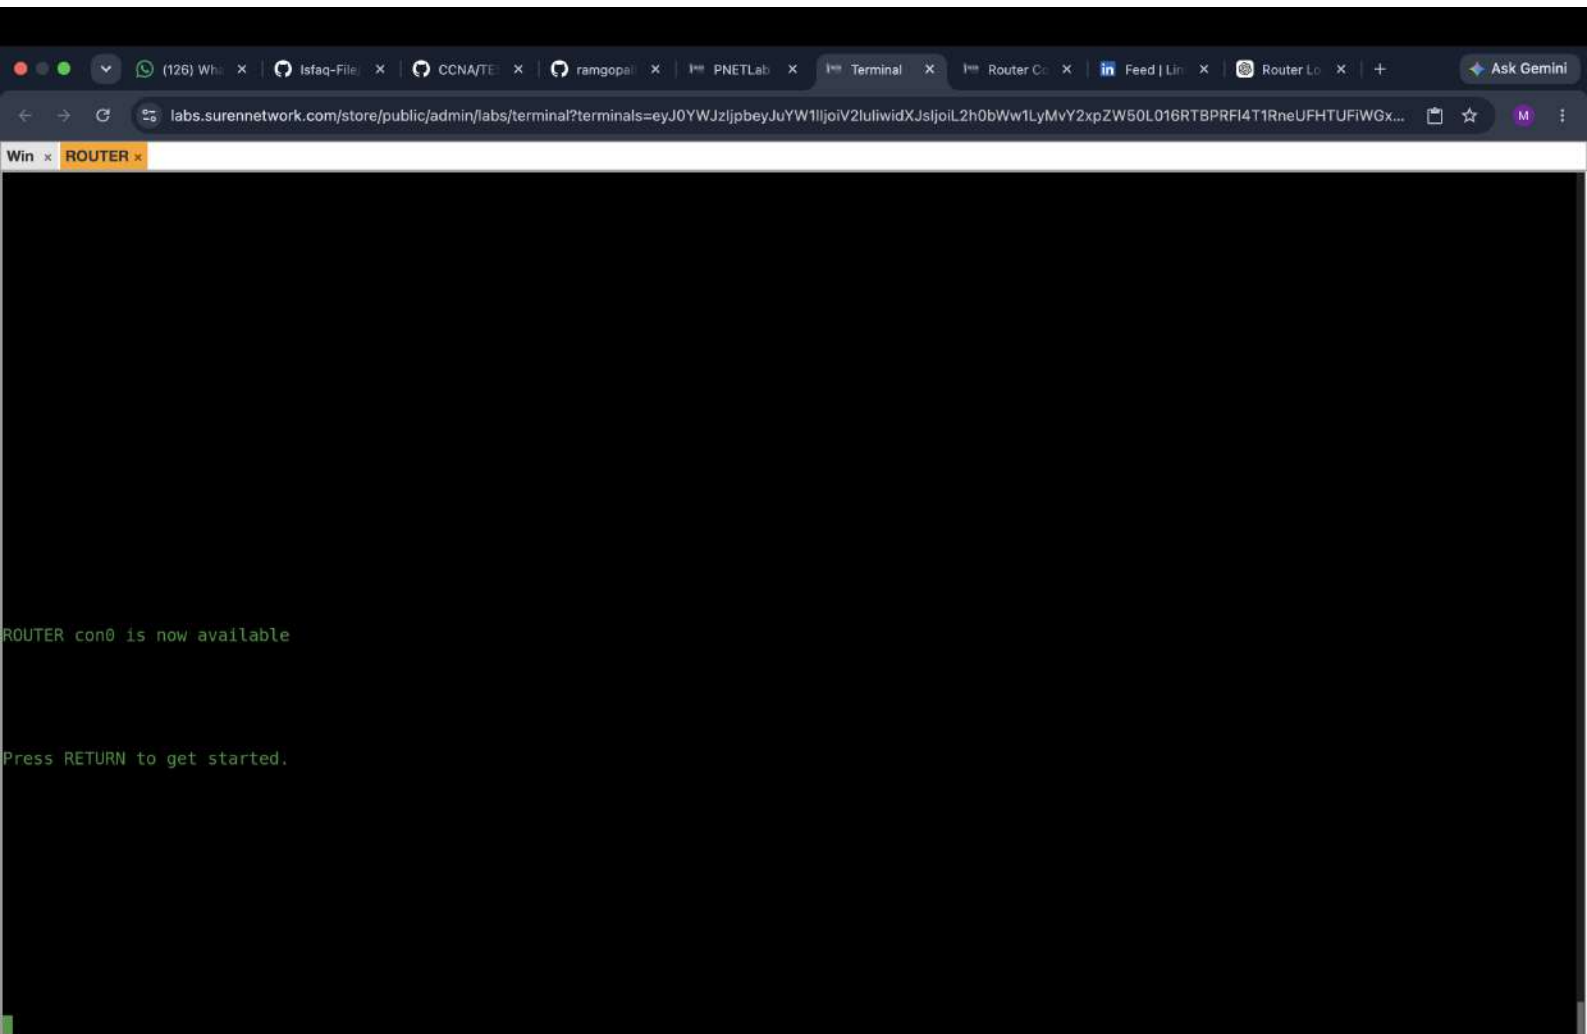

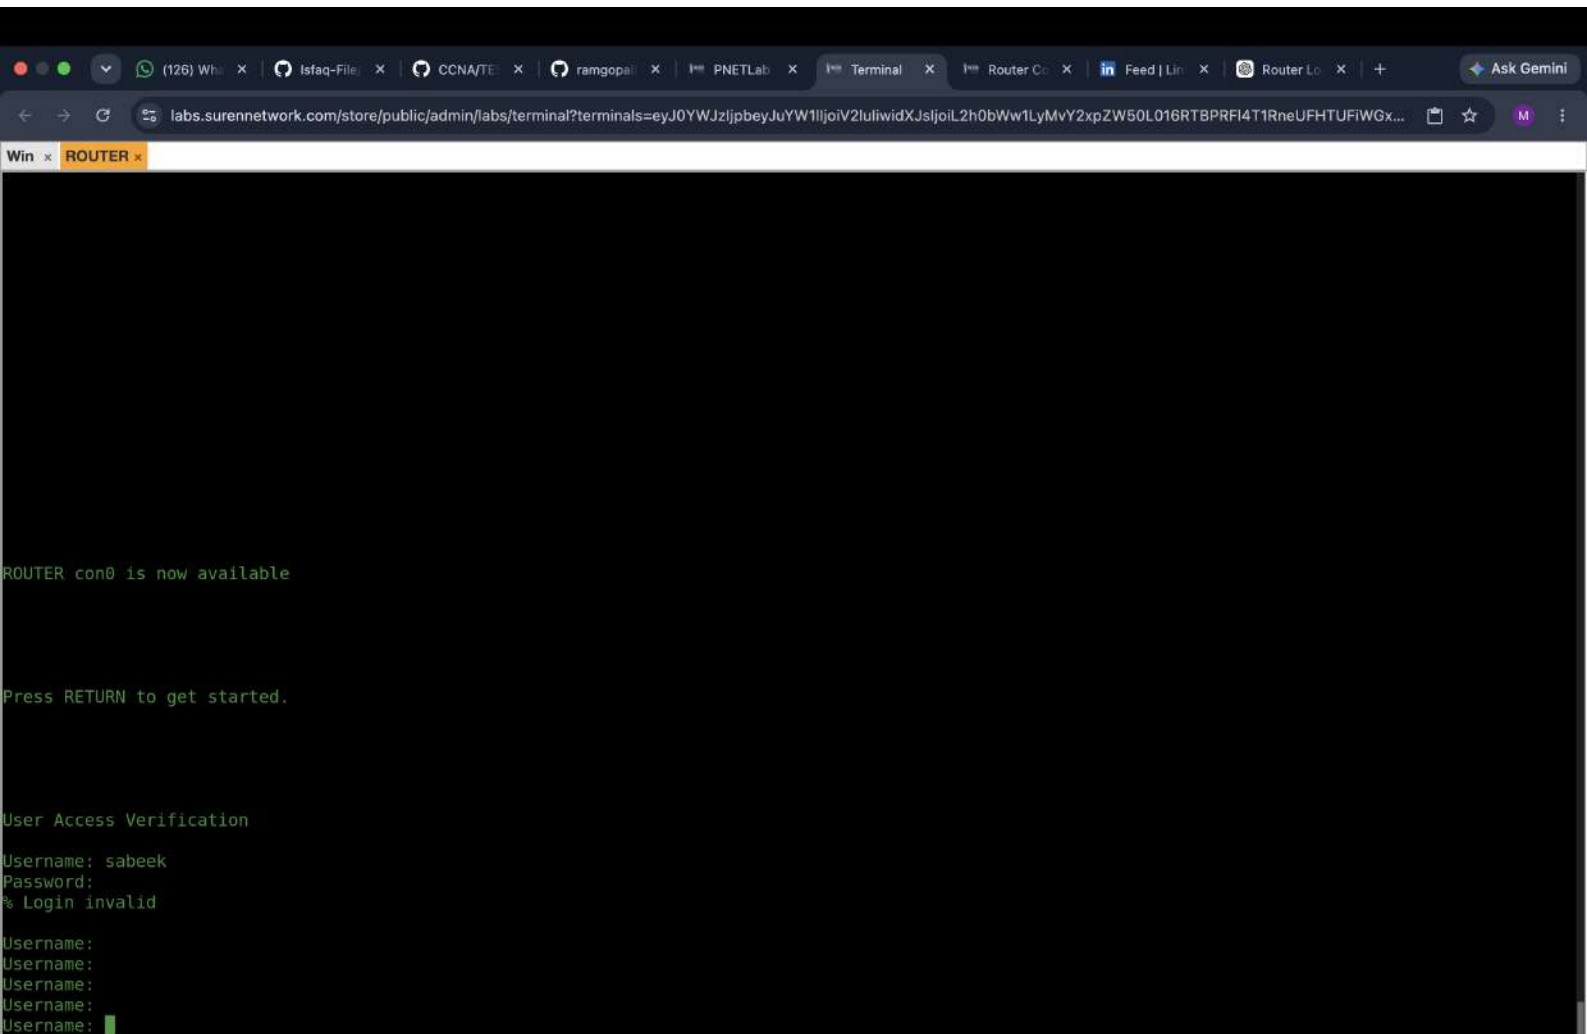

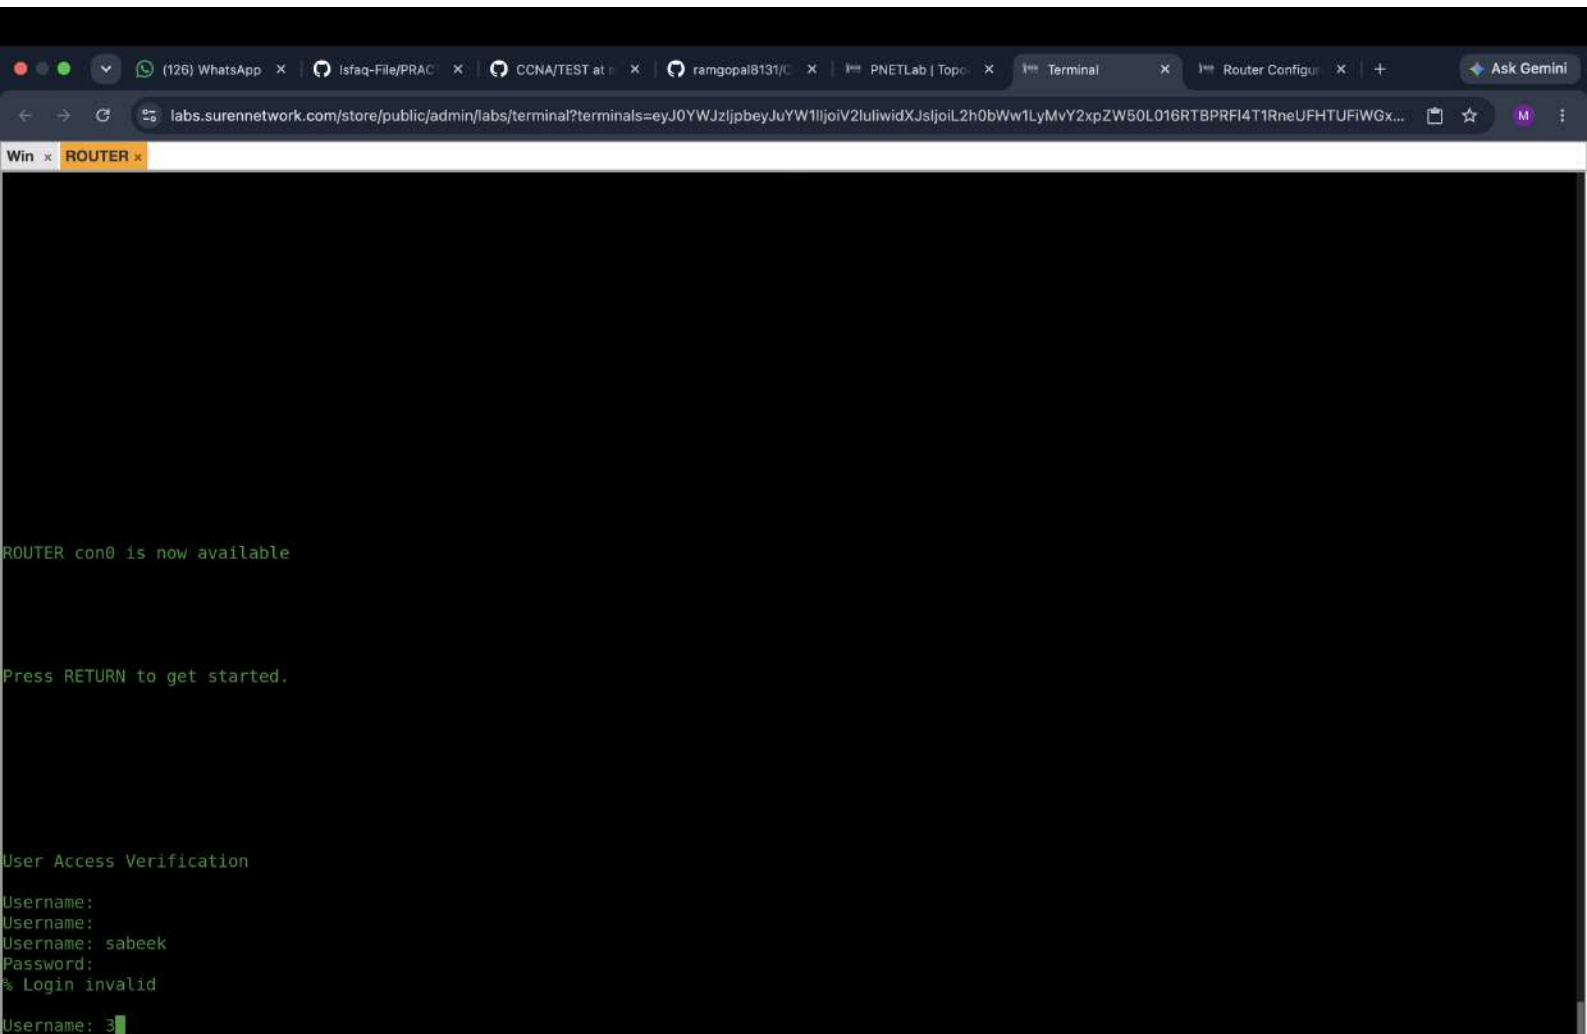

```
Win x ROUTER x
ROUTER#
ROUTER#
ROUTER#enable
ROUTER#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
ROUTER(config)#configureterminal
      ^
% Invalid input detected at '^' marker.
ROUTER(config)#configure terminal
      ^
% Invalid input detected at '^' marker.
ROUTER(config)#golbal confihuration mode
      ^
% Invalid input detected at '^' marker.
ROUTER(config)#interface ethernet 0/0
ROUTER(config-if)#ip address 50.0.0.1 255.0.0.0.
      ^
% Invalid input detected at '^' marker.
ROUTER(config-if)#ip address 50.0.0.1 255.0.0.0
ROUTER(config-if)#exit
ROUTER(config)#exit
ROUTER#
*Aug 20 09:43:30.349: %SYS-5-CONFIG_I: Configured from console by console
ROUTER#show ip interface brief
Interface      IP-Address      OK? Method Status      Protocol
Ethernet0/0    50.0.0.1        YES manual up          up
Ethernet0/1    unassigned      YES TFTP  down        down
Ethernet0/2    unassigned      YES TFTP  down        down
Ethernet0/3    unassigned      YES TFTP  down        down
ROUTER#
```