


Laboratorio di simulazione

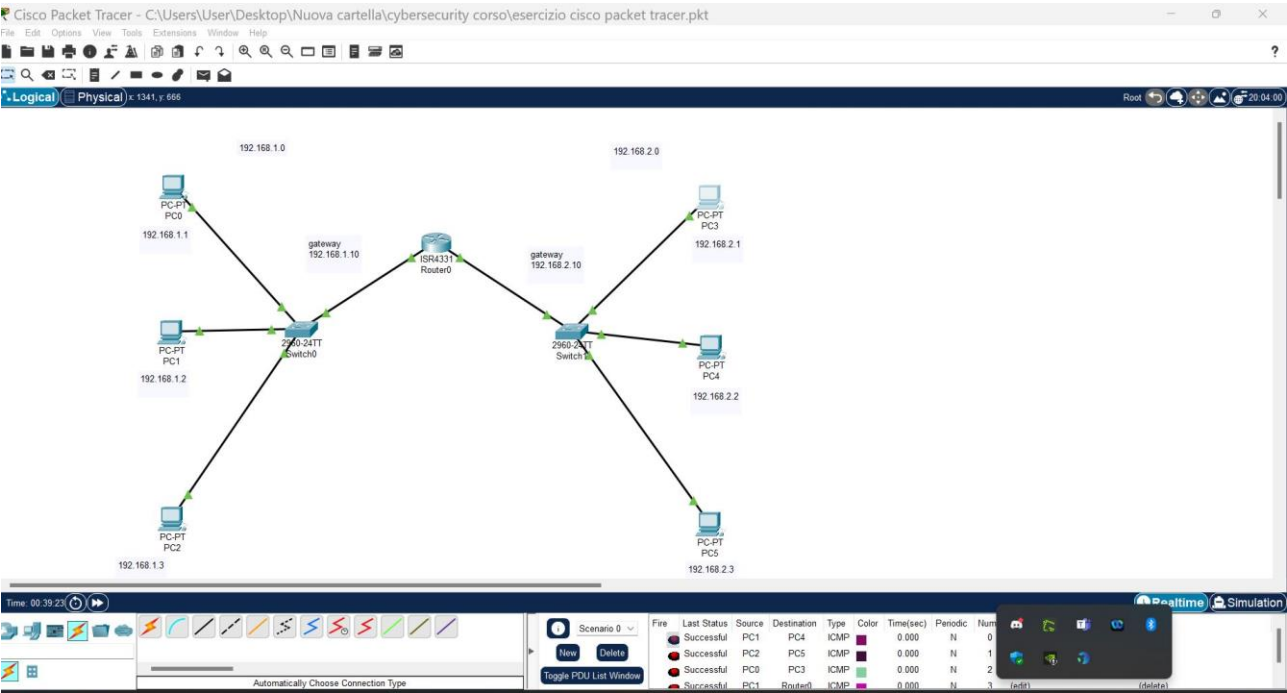

Prove PING con successo

```
PC0
Physical Config Desktop Programming Attributes
Command Prompt

Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.2.1

Pinging 192.168.2.1 with 32 bytes of data:

Reply from 192.168.2.1: bytes=32 time<lms TTL=127
Reply from 192.168.2.1: bytes=32 time<lms TTL=127
Reply from 192.168.2.1: bytes=32 time=17ms TTL=127
Reply from 192.168.2.1: bytes=32 time<lms TTL=127

Ping statistics for 192.168.2.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 17ms, Average = 4ms

C:\>ping 192.168.2.2

Pinging 192.168.2.2 with 32 bytes of data:

Reply from 192.168.2.2: bytes=32 time<lms TTL=127
Reply from 192.168.2.2: bytes=32 time<lms TTL=127
Reply from 192.168.2.2: bytes=32 time<lms TTL=127
Reply from 192.168.2.2: bytes=32 time<lms TTL=127

Ping statistics for 192.168.2.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.2.3

Pinging 192.168.2.3 with 32 bytes of data:

Reply from 192.168.2.3: bytes=32 time<lms TTL=127
Reply from 192.168.2.3: bytes=32 time<lms TTL=127
Reply from 192.168.2.3: bytes=32 time<lms TTL=127
Reply from 192.168.2.3: bytes=32 time<lms TTL=127

Ping statistics for 192.168.2.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```