FEATURES:

This series electric valve actuator has the following features:

- Compact and robust construction, lightweight.
- Wide range of torque variation (Multi-turn: 100-3500Nm Quarter-turn: 100-165000Nm).
- Hard anodized aluminum housing inside and outside with external high temperature paint coating for use against severe industrial environment.
- Enclosure uses radial seals & O-rings that provide protection to waterproof IP67 and optional watertight IP68.
- ISO5211 standard.
- It automatically identifies and corrects phases. Automatic phase failure protection protects equipment safety.
- Reliable mechanical torque sensing system providing safe operation in overload condition.
- Large size window and indicator provides better position indication from a distance.
- Number of local position control options to provide easy commissioning and field operation.

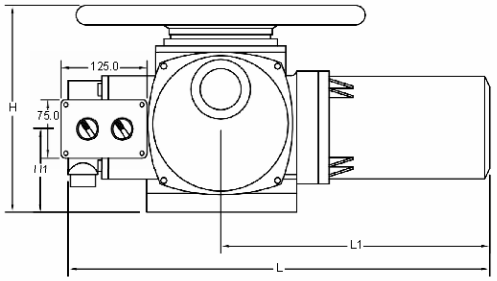


FIG- FRONT VIEW

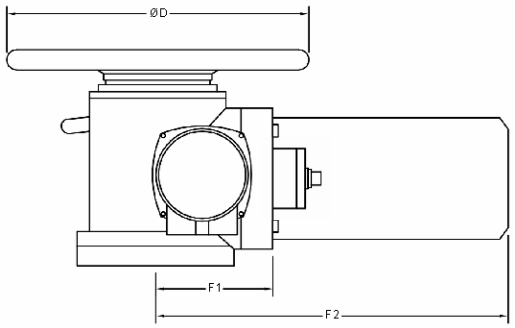


FIG- LEFT SIDE VIEW



Terminal Box
An independent, sealed terminal box maintains integrity during wiring and ensures compliance with explosion-proof requirements.

Shell anti-corrosion
Coated with a tough aluminum alloy paint, this actuator offers strong adhesion and resistance to UV and corrosion. Its self-cleaning finish ensures long service life in harsh environments.

Motor
The low-inertia, high-torque motor delivers instant peak power with precise stopping. Integrated thermal sensors and control limits actively prevent overheating damage.

Sealed Structure
Featuring a double-sealed structure for full environmental protection, this actuator offers standard IP67 and optional IP68 ratings.

Power Transmission
Featuring a bronze and alloy steel worm gear set, the transmission runs in grease to ensure longevity and resistance to extreme temperature variations.

Output Interface
Compliant with ISO5210/5211 and JB2920 standards, the flange interface supports full customization for specific needs.

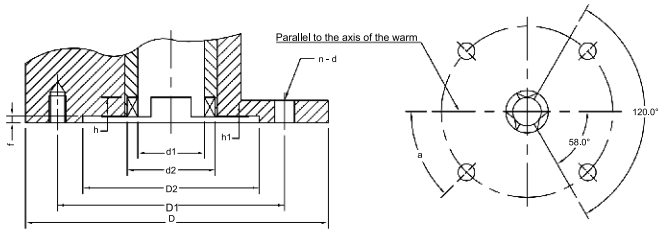


FIG- ACTUATOR MOUNTING

MODEL	BASE NO.	D	D1	D2 (H9)	h1	f	h	d1	d2	d	n	a
IS-Z10 - 15	2	145	120	90	2	5	8	30	45	M10	4	45°
IS-Z20 - 30	3	185	160	125			10	42	58	M12		
IS-Z45 - 60	4	225	195	150			12	50	72	M16		
IS-Z90- 120	5	275	235	180			14	62	82	M20		
IS-Z180 - 250	7	330	285	220	3	6	16	72	98	Ø26		
IS-Z350	8	380	340	280	3	6	20	83	118	Ø22	8	22. 5°

MODEL	L	L1	H	H1	F1 Normal	F2 intelligence type	ØD
IS-DZW10 - 15	382	228	233	87	150	203	300
IS-DZW20 - 30	435	278	248	90	157	210	350
IS-DZW45 - 60	708	335	338	-	305	401	250
IS-DZW90- 120	795	390	347	-	312	423	250
IS-DZW180-250	825	445	408	-	347	462	350
IS-DZW350	905	530	408	-	347	462	350

TECHNICAL SPECIFICATIONS

ACTUATOR	
Make	I & S
Model	in-Tork
Protection Grade	Standard IP67 Special Ip68
Power supply	Three-phase AC380V---460V 50/60Hz Single-phase: AC110V-AC220V
Duty cycle(on-off)	S2-15 minutes
Duty cycle(modulating)	S4, 25%
Control methods	Local control/DCS
Motor protection	Overheating/Overload and short circuit/Instantaneous reverse/ Electronic brake protection
Torque protection	Mechanical torque/Electronic torque protection
Jam protection	Build-in overheat protection
Travel angle	360°
Repeatability error	≤±1%
Basic error limit	≤1%
Dead zone setting	0.1%-9.9% adjustable
Ambient temperature	Standard: -20 ~ +60℃ Optional: -40 ~ +70℃
Ambient humidity	95%RH max (Non-condensing)
External coating	High temperature paint
Functions	LCD English display window and local operation function Self phase sequence identifying and phase disconnection protection Fault self-diagnosis technology Modbus RTU, Profidbus DP, Hart, FF, DeviceNe(optional)
Signal	A: Remote passive dry contact, signal short pulse (Inching) B: Remote passive dry contact, signal long pulse (hold) C: Active DC24V signal D: Active AC220V signal E: Remote DC4-20mA signal
Feedback signal	A: Open, close, stop signals B: Fault signal C: Valve position signal (DC4-20mA, DC1-5V, DC0-10V) D: Remote control signal





DISPLAY AND EXTERNAL CONTROLS

Local electric operation

The operating switch "Open"-"Close" installed on the local operating device can be used to open or close actuator locally.

Selection of control mode

The selective switch "Remote"-"Stop"-"Local"installed on the local operating device can be used to set up remote operation (remote control) or local operation (local control) or stop mode.

LCD interface

The LCD interface can display text information, graphical elements and actuator characteristics.





INBUILT PROGRAMMABLE CONTROLLER	
Type	Programmable Controller
Mounting	Integrated with Housing
Key Features	Display for valve position High & Low Position Locking Provision Overload Protection Provision is Available Inbuilt Phase Failure Protection Circuit with Alarm Inbuilt Voltage Failure Protection Circuit with Alarm Calibration of Valve position is available
Push Butons	For Manual Operation
Remote Operation 1 Remote Operation 2	Open / Close & Stop terminals are available 4-20 mA control terminals

