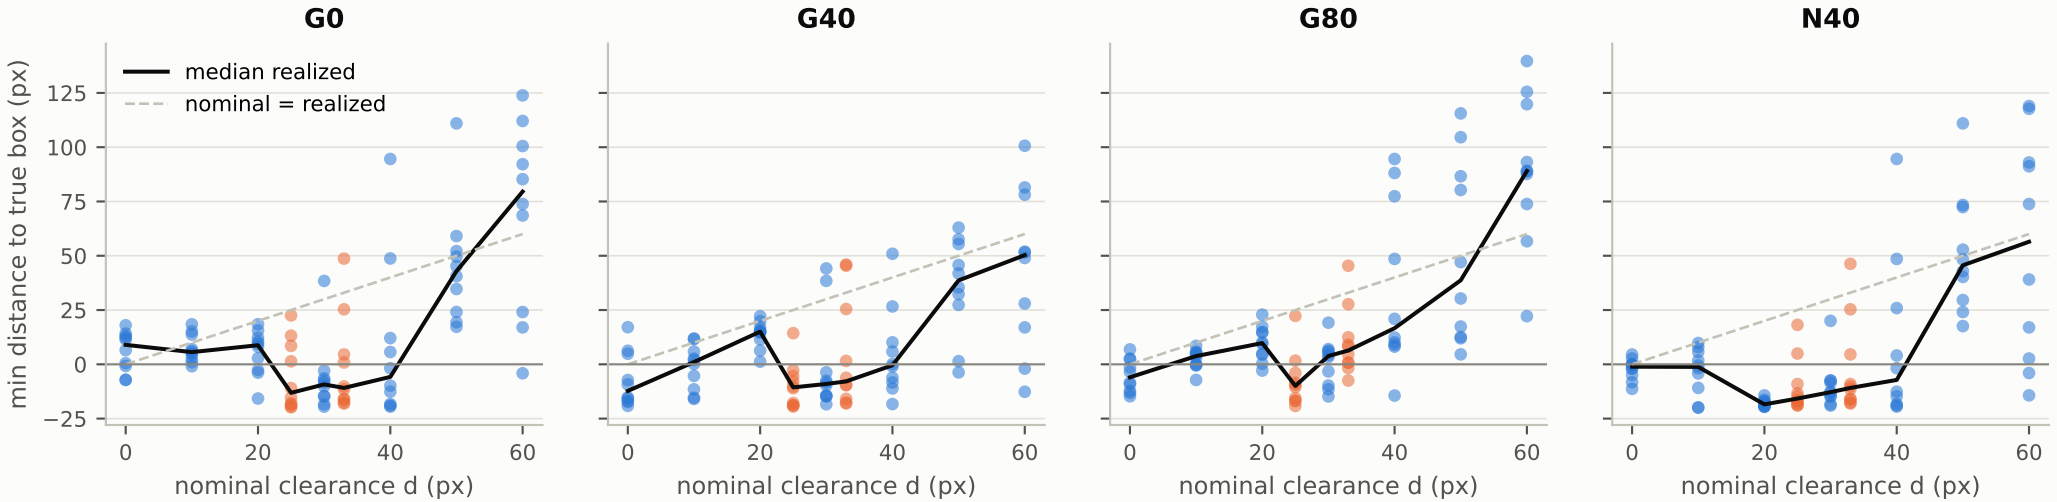
Calibration: nominal clearance against realized clearance
G0
G40
G80
N40
median realized
nominal = realized
min distance to true box (px)
nominal clearance d (px)
125
100
75
50
25
0
−25
0
20
40
60