

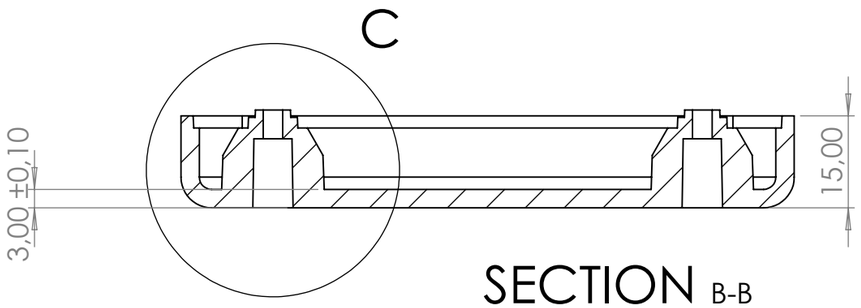



SECTION B-B

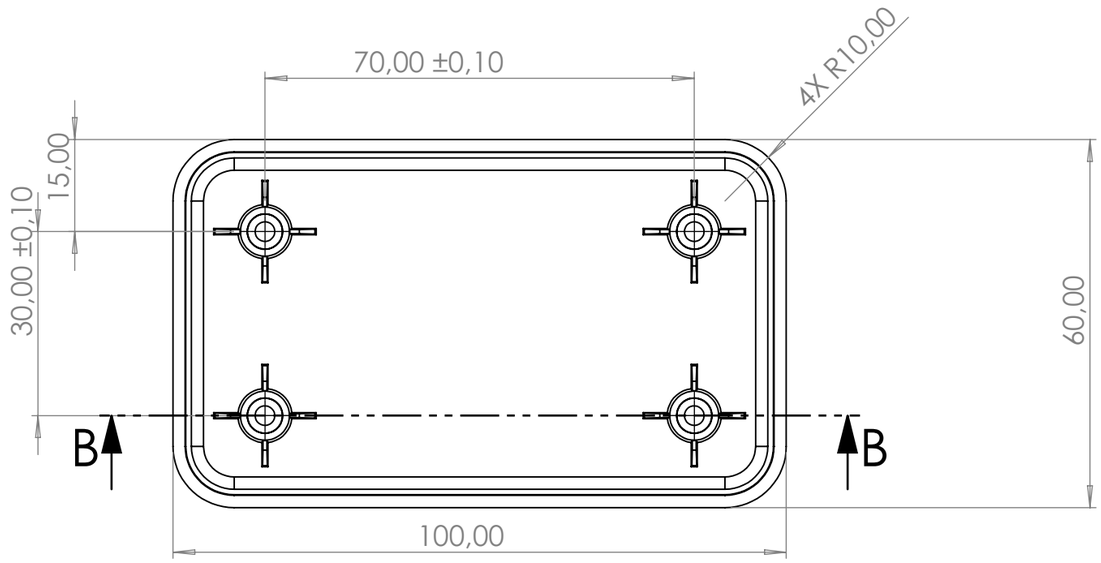

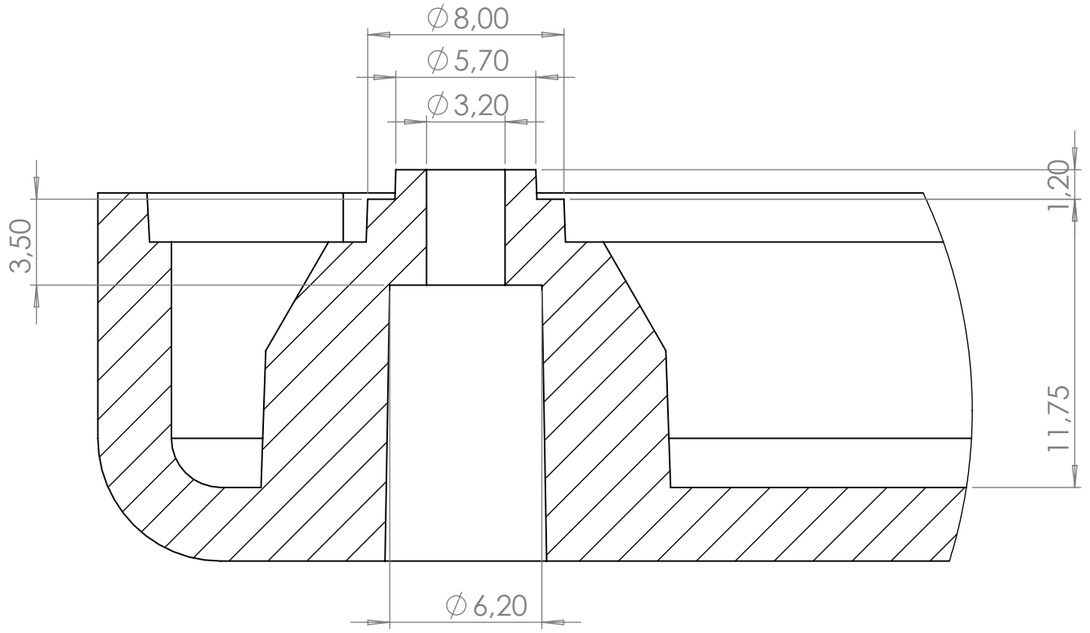

DETAIL C

SCALE 4 : 1

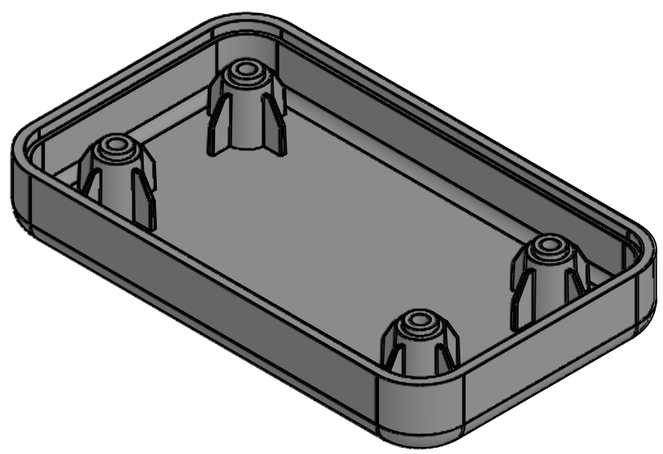

MANUFACTURING & TOOLING NOTES:
1. MATERIAL: PC/ABS (SABIC CYCOLOY C2950 OR EQUIVALENT), UL 94 V-0 RATED.
2. GENERAL TOLERANCES: IN ACCORDANCE WITH DIN 16742 - TG6 (PLASTIC MOULDINGS).
3. TOOLING SHRINKAGE: TOOL TO BE CUT WITH 0.5% (0.005 mm/mm) ISOTROPIC SHRINKAGE.
4. DRAFT ANGLES: ALL VERTICAL WALLS TO HAVE 1.0° MINIMUM DRAFT UNLESS NOTED.
5. CORNER RADII: INTERNAL RADII R0.5 mm MINIMUM TO REDUCE NOTCH STRESS CONCENTRATION.
6. SURFACE TEXTURE:
   - EXTERIOR COSMETIC SURFACES: VDI 3400 REF. 24 (FINE EDM SPARK EROSION).
   - INTERIOR CAVITY: SPI-C1 (STONE FINISH 600 GRIT).
7. EJECTOR PINS: PERMITTED ON INSIDE RIBS AND REST BOSS FACES ONLY. PINS MUST BE FLUSH TO -0.15 mm SUB-FLUSH. NO WITNESS MARKS ON EXTERIOR.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:		FINISH:			DEBURR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION
	NAME	SIGNATURE	DATE			TITLE: Enclosure Lower Shell	
DRAWN							
CHK'D							
APPV'D							
MFG							
Q.A				MATERIAL:		DWG NO. Bottom_Cover	A3
				WEIGHT:		SCALE:1:1	SHEET 1 OF 1

SOLIDWORKS Educational Product. For Instructional Use Only.