

ITEM NO.	PART NUMBER	DESCRIPTION	Material	QTY.
1	Top_Cover	Enclosure Upper Shell	PC/ABS (UL 94 V-0)	1
2	Bottom_Cover	Enclosure Lower Shell	PC/ABS (UL 94 V-0)	1
3	94459A140	Heat-Set Threaded Insert M3x0.5, L=5.7mm	Brass (C36000)	4
4	91292A113	Socket Head Cap Screw, ISO 4762 - M3 x 10	18-8 Stainless Steel	4

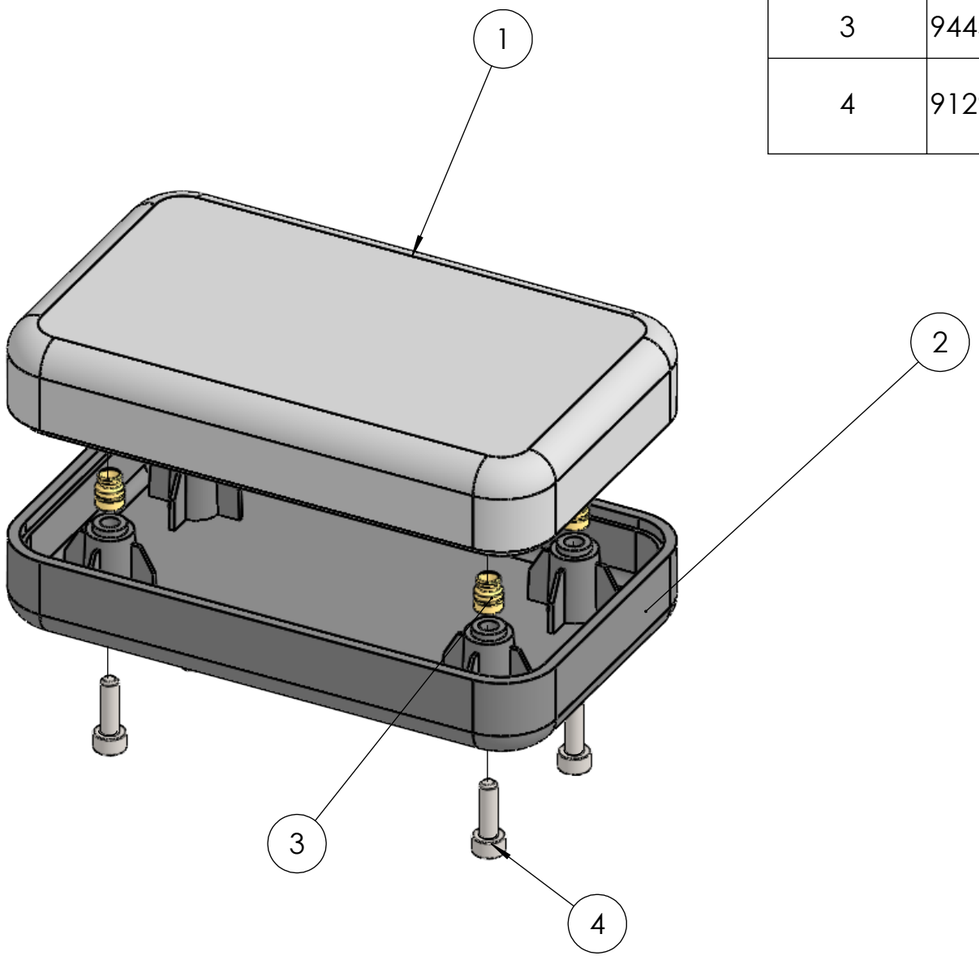

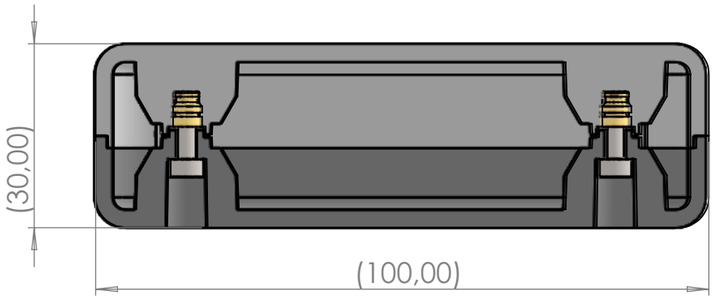

ASSEMBLY NOTES:
1. INSERTION PROCESS: HEAT-STAKE (4x) M3 BRASS INSERTS (ITEM 3) INTO TOP COVER.
   INSERTS MUST SEAT 0.1 mm - 0.2 mm SUB-FLUSH RELATIVE TO BOSS REST FACE.
2. FASTENING: TORQUE (4x) M3x10 SCREWS (ITEM 4) TO 0.60 N·m ± 0.05 N·m.
3. NO VISIBLE FLASH OR GAP PERMITTED ALONG PERIMETER PARTING LINE AFTER TORQUING.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:	FINISH:				DEBURR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION A
	NAME	SIGNATURE	DATE			TITLE: 2-PIECE ELECTRONIC ENCLOSURE ASSEMBLY	
DRAWN	Sachin Salaskar		13.10.2026				
CHK'D							
APPV'D							
MFG							
Q.A				MATERIAL: SEE BOM		DWG NO. ENC-ASM-001	A3
				WEIGHT:		SCALE:1:1	SHEET 1 OF 1

SOLIDWORKS Educational Product. For Instructional Use Only.