



PRESSURE TANK

Features:


- ◆ NSF Standard 61, IAPMO R&T UPC approved
- ◆ Polypropylene liner ensures long durability
- ◆ Butyl diaphragm assure long life and safety
- ◆ Highly rust resistant durable baked epoxy coating finish
- ◆ Cast stainless steel water connection
- ◆ O-ring sealed air valve cap
- ◆ 100% pressure tested
- ◆ No maintenance

www.apecpump.com



PRESSURE TANK

Aquafos water tanks are suited for all water systems: industrial, domestic and agricultural. The tanks are constructed of a polypropylene liner combined with high grade butyl diaphragm to isolate water and air. This provides a closed system for drinking water preventing the growth of bacteria and vermin intrusion. The cast stainless steel water connection is used for corrosion resistance. All tanks are quality tested to ensure the structural integrity of every tank.

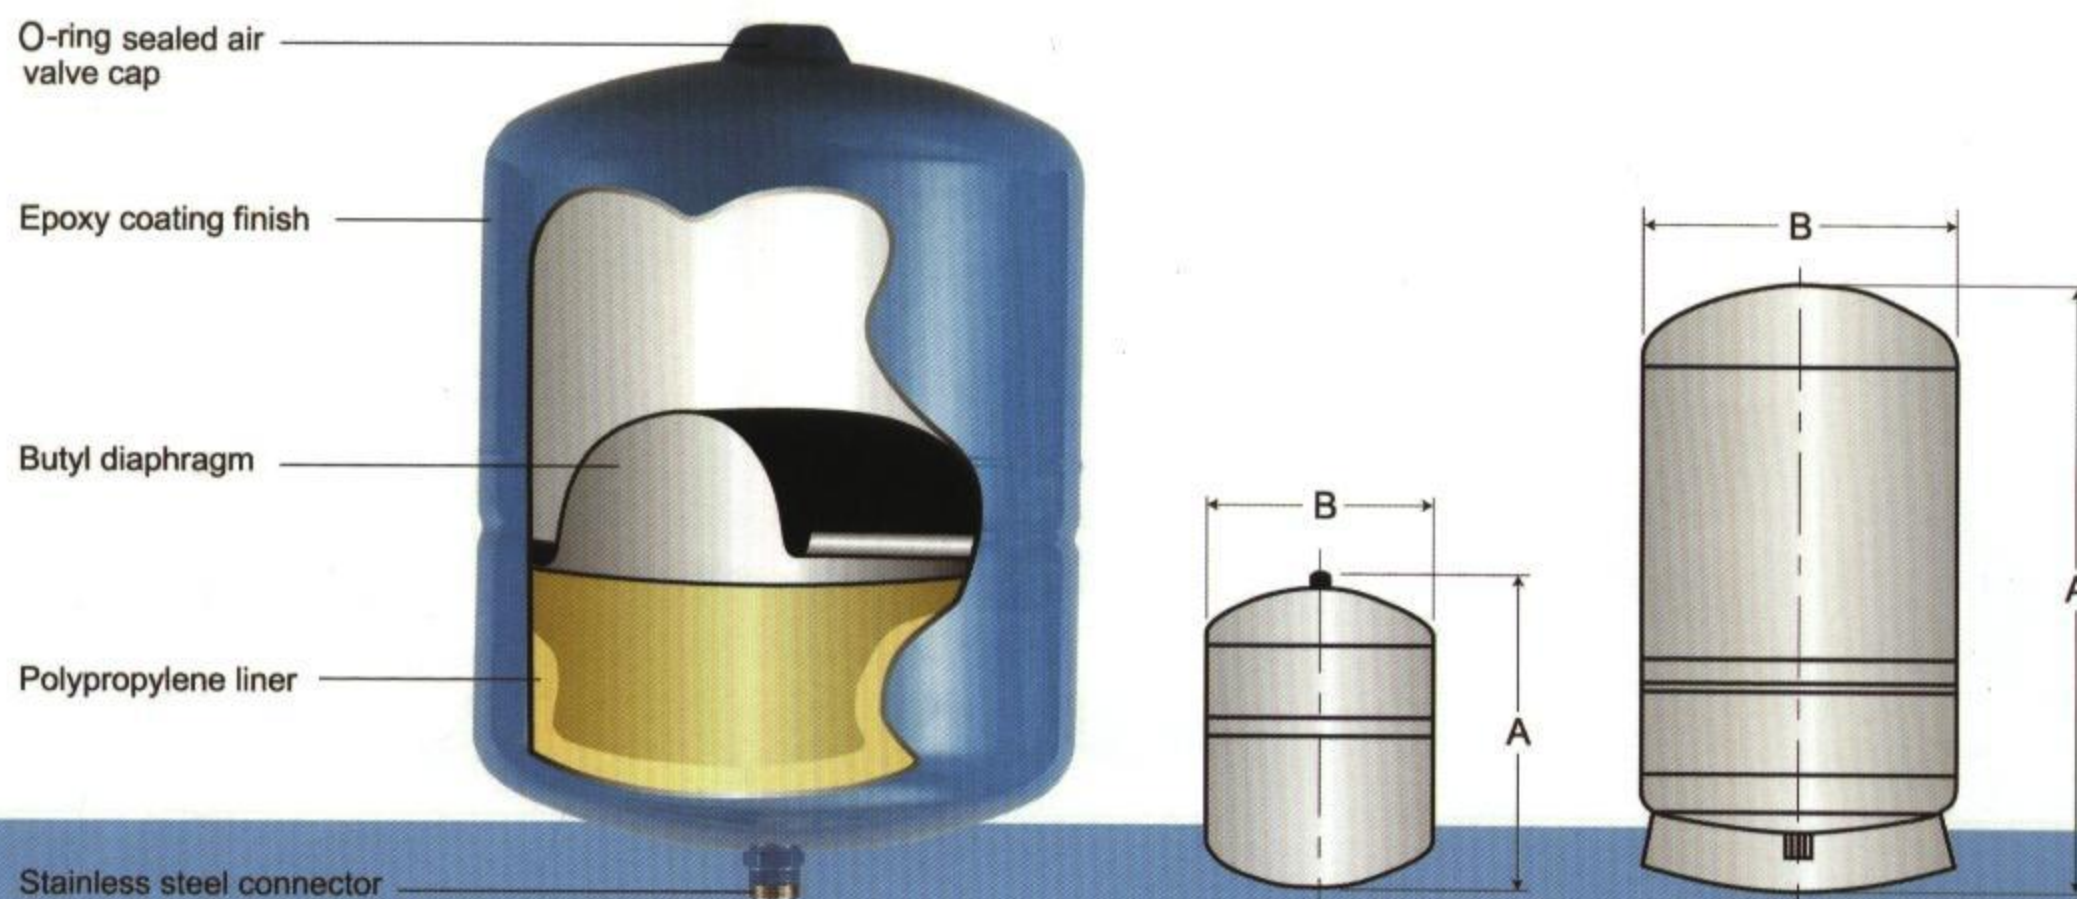

Specifications

Model		Volume		Dimensions				Connection	Shipping Volume (box)		Shipping Weight	
				A		B						
BSP	NPT	liter	gal	mm	inches	mm	inches		cu. M	cu. ft	kg	lbs
SPTB3	SPTN3	2.8	0.7	204	8	140	5.5	1" BSP / 3/4" NPT	0.09	3.1	14	30.8
SPTB8	SPTN8	8	2	300	11.7	202	7.9	1" BSP / 3/4" NPT	0.016	0.55	2.5	5.5
SPTB18	SPTN18	18	4.5	380	14.8	276	10.8	1" BSP / 3/4" NPT	0.031	1.10	4.2	9.3
SPTB24	SPTN24	24	6	420	16.4	290	11.3	1" BSP / 3/4" NPT	0.041	1.45	4.7	10.4
Vertical Models with base												
SPTB58	SPTN58	58	14.5	560	21.8	390	15.2	1" BSP / 3/4", 1" NPT	0.099	3.50	11.5	25.3
SPTB80	SPTN80	80	20	680	26.5	390	15.2	1" BSP / 3/4", 1" NPT	0.131	4.63	13.0	28.7
SPTB160	SPTN160	160	40	910	35.5	560	21.8	1 1/4" BSP / 1 1/4" NPT	0.313	11.06	25.0	55.0

All connections are stainless steel.

All tanks are pre-charged at 30 psi / 2 bar unless stated otherwise.

Maximum Working Pressure: 150 psi / 10 bar

Maximum Working Temperature: 200°F/90°C

SPTB(N)3 tanks : 12 pcs/1box



3F., No.394, Sec. 2, Mingzhi Rd., Taishan Shiang,
Taipai County 243, Taiwan (R.O.C.)
Tel: 886-2-2903-4567
Fax: 886-2-2906-4567
E-mail: sales@apecpump.com

www.apecpump.com