

MINT[®] POWER ELECTRIC

POWERING PROGRESS
WITH INNOVATION

MU2-S3 , MU2-S4 CONTACTOR



MU2-S3



MU2-S4

CE


**AN ISO 9001:2015
CERTIFIED COMPANY**

www.mintpowerelectric.com




MU2-S3
4Pole Contactor

1. MU1-S3, MU2-S3, MU3-S3, MU4-S3



MU2-S4
4Pole Contactor

2. MU1-S4, MU2-S4, MU3-S4, MU4-S4



MU1-S3 , MU2-S3 , MU3-S3 , MU4-S3 , 4Pole Contactor.
Three Phase/Single Phase 3NO Power Pole + 1NO Aux. Contact
Coil Voltage Order Code- M-240V , Q-360V , N-415V 50Hz/60Hz

HS CODE 8538

Cat. No.	AC3 Rating (A)	AC1 Rating (A)	Coil Voltage	Number of Pole	Power Pole	Aux. Cont.	Std. Pkg. Nos.
MU1-S3	16A.	55A.	N 415V	4	3	1NO	24Pcs.
MU2-S3	25A.	63A.	N 415V	4	3	1NO	24Pcs.
MU3-S3	32A.	63A.	N 415V	4	3	1NO	24Pcs.
MU4-S3	40A	70A	N 415V	4	3	1NO	24Pcs.

MU1-S4 , MU2-S4 , MU3-S4 , MU4-S4 , 4Pole Contactor
Three Phase/Single Phase 4NO Power Pole Contacts
Coil Voltage Order Code- M-240V , Q-360V , N-415V 50Hz/60Hz

HS CODE 8538

Cat. No.	AC3 Rating (A)	AC1 Rating (A)	Coil Voltage	Number of Pole	Power Pole	Std. Pkg. Nos.
MU1-S4	16A	55A	N 415V	4	4	24Pcs.
MU2-S4	25A	63A	N 415V	4	4	24Pcs.
MU3-S4	32A	63A	N 415V	4	4	24Pcs.
MU4-S4	40A	70A	N 415V	4	4	24Pcs.

Features




- ➔ Suitable for single & Three phase pump and motor applications
- ➔ Suitable for low voltage condition
- ➔ High temperature withstand capability
- ➔ Low VA consumption
- ➔ Available with wide band coil
- ➔ Easy inspection and replacement of coils and contacts
- ➔ Robust Design suitable for tropical conditions

Contactor

Dimensional Drawings

Mounting Arrangement

**MU2-S3 ,
MU2-S4
CONTACTOR**

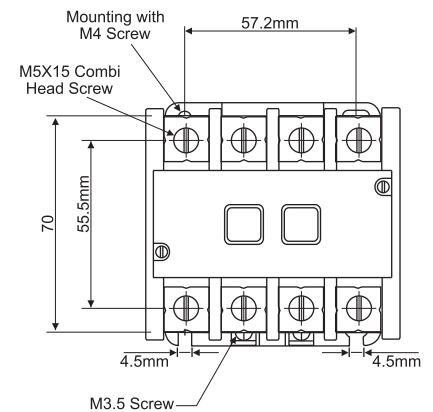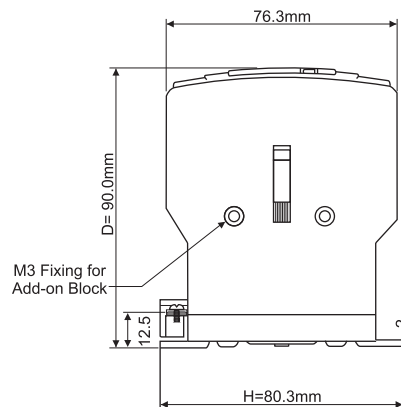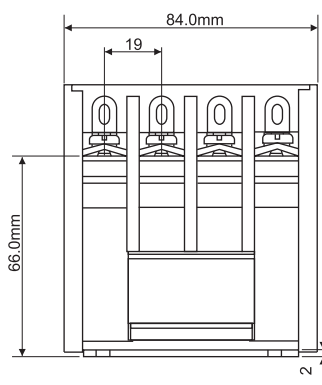

**MU2-S3 , MU2-S4
CONTACTOR**

MiNT[®] POWER --- ELECTRIC

**POWERING PROGRESS
WITH INNOVATION**

Synergy Enterprises

MANUFACTURERS OF:
DEFINITE PURPOSE CONTACTOR, POWER CONTACTOR
SUBMERSIBLE CONTROL PANELS

CB-303B, RING ROAD, NARAINA, NEW DELHI - 110028
TEL.: +91-9811456067



www.mintpowerelectric.com



info@mintpowerelectric.com