


03 pilot cross-device check | 3.5 A, current phase = 4 x travel | Min Angle = 15 deg
b31089763d90 | U | PM cells: 120

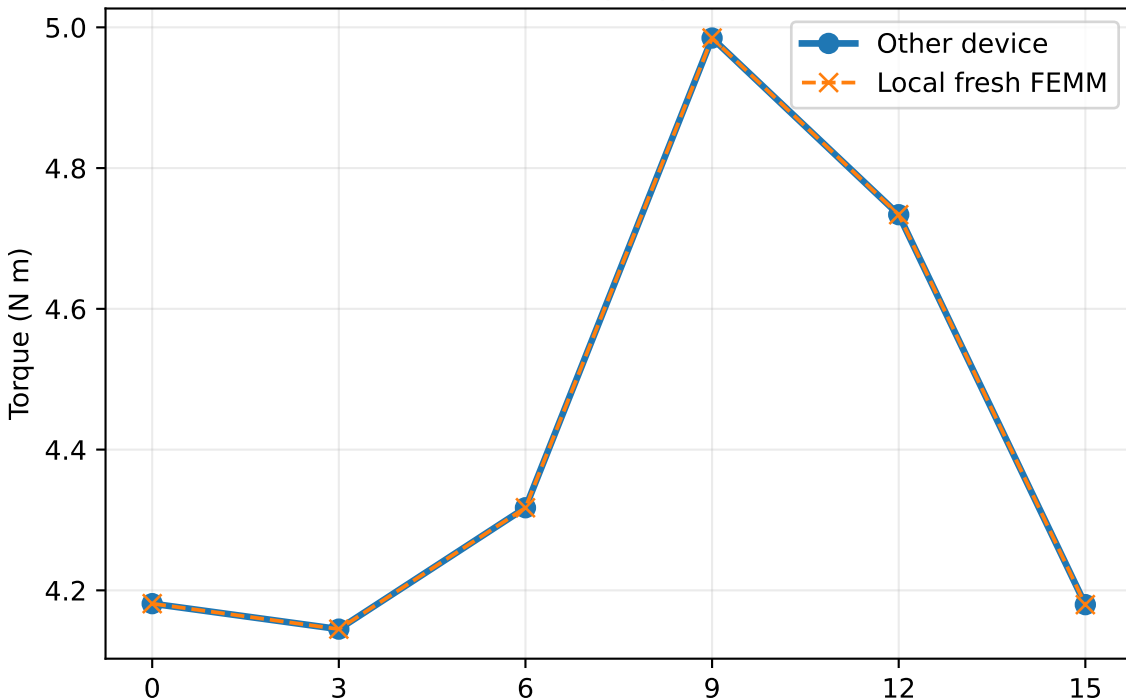


Rotor travel (mechanical deg); inner = travel + 29 deg

Other: mean 4.423606911; ripple 0.839858465 N m

Local: mean 4.423606911; ripple 0.839858465 N m

Max point difference: 0 N m

05389c43608d | L | PM cells: 67

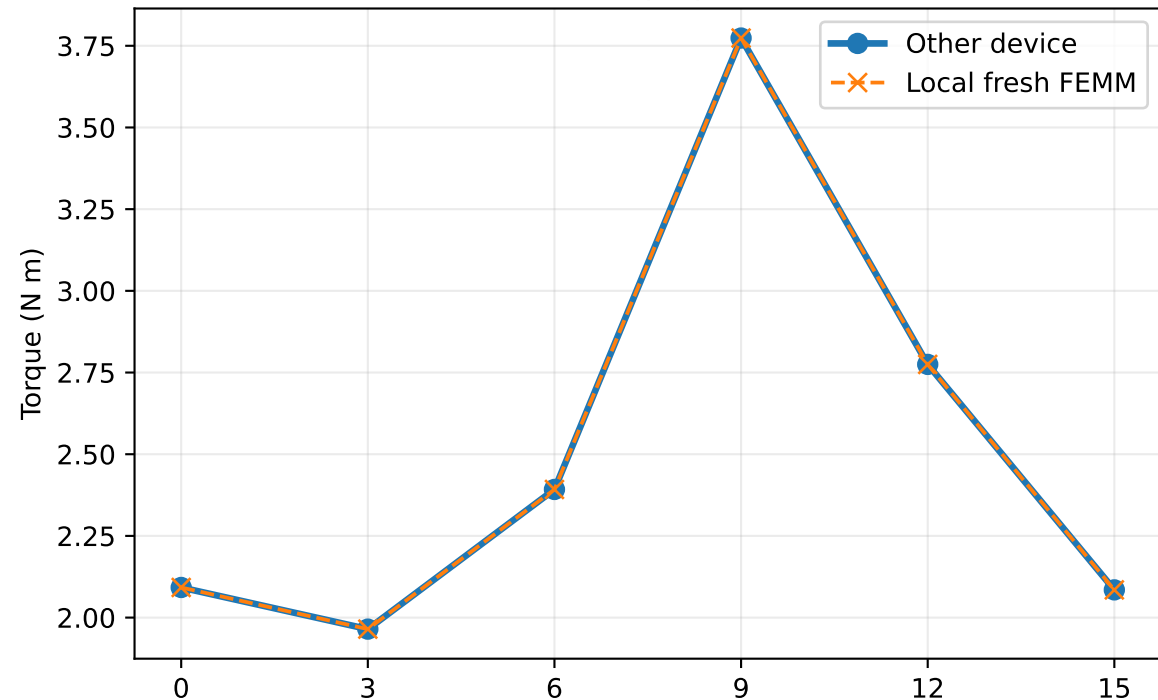

Rotor travel (mechanical deg); inner = travel + 29 deg

Other: mean 2.513741123; ripple 1.808974291 N m

Local: mean 2.513741123; ripple 1.808974291 N m

Max point difference: 0 N m