
## 1. MAC Headerを収集

Frame Control	Duration	DA1	SA1	BSSID1	Sequence Control
Frame Control	Duration	DA2	SA2	BSSID2	Sequence Control
Frame	Duration	DAn	SAn	BSSIDn	Sequence

Control

## 2. DA, SA, BSSIDを抜き出し、APのBSSID毎に整理

Control

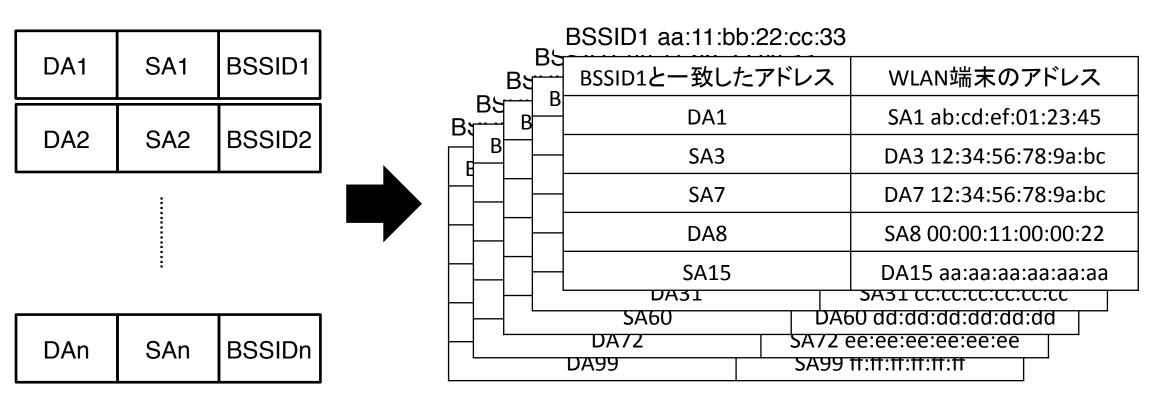

## 3. 重複しているWLANアドレスを削除し、行数をカウント

BSSID1 aa:11:bb:22:cc:33

BSSID1と一致したアドレス	WLAN端末のアドレス	
DA1	SA1 ab:cd:ef:01:23:45	
SA3	DA3 12:34:56:78:9a:bc	
SA7	DA7 12:34:56:78:9a:bc	<u></u>  -
DA8	SA8 00:00:11:00:00:22	
- 1,10		
SA15	DA15 aa:aa:aa:aa:aa	

WLAN端末接続数:4