GARBAGE MONITORING SYSTEM

By: SAGARIKA SANTOSH CHOUDHARY

https://github.com/Sagarikac310/Smart-Garbage-IoT

The idea struck when I observed that the garbage truck use to go around the town to collect solid waste twice a day. Although this system was thorough it was very inefficient. For example let's say street A is a busy street and we see that the garbage fills up really fast whereas maybe street B even after two days the bin isn't even half full.




What the system does is it gives a real time indicator of the garbage level in a trashcan at any given time. Using that data we can then optimize waste collection routes and ultimately reduce fuel consumption. It also allows trash collectors to plan their daily/weekly pick up schedule.

COMPONENTS IN OUR SYSTEM

To start with you will first have to enter the height of the dustbin. This will help us generate the percentage of trash in the trashcan. We then have two criterias which needs to be satisfied to show that the particular bin needs to be emptied:

1. The



amount of trash, in other words let's say if your bin is half full you don't really need to empty it. Our thresh, or maximum amount that we permit of trash, is 75% of the bin. (You could alter the thresh according to your preference.)

With these criterias in mind let's understand the technical part:

- An ultrasonic sensor (A.K.A a distance sensor) will be placed on the interior side of the lid, the one facing the solid waste.
- Arduino
- A LED to know the state.

MATERIALS NEEDED

HARDWARE:

- 2 x AA Batteries these batteries will power the Arduino board
- Plastic Container
- Battery Holder Case

- <u>Ultrasonic Sensor</u> An ultrasonic sensor measures distance. Our system's key component.
- Jumper Wires
- Arduino
- · LED lights

TOOLS:

- Electric Drill
- Hot Glue Gun

SOFTWARE:

Arduino IDE

SET UP

(1) Constructing the Model

Look for an old small plastic container and make sure your components fit. Now remove the lid and trace the two "eyes" of the ultrasonic sensor. this will be the side facing the bottom of the bin. Take your drill bitand drill out the holes. If they still are a bit small lightly file them till the ultrasonic sensor snugly fits in, completely flush to the surface.

(2) Attaching the ULTRASONIC SENSOR

Push in the sensor and apply dabs of hot glue to secure it in place. Then make a slot for your switch and fit everything into place.

(3) Installing Drivers and Libraries Necessary

(4) THE CIRCUIT

Once you've installed the libraries and drivers, connect the ultrasonic sensor to the arduino.


- vcc on sensor goes to 5v on arduino
- gnd on sensor goes to gnd on arduino
- trig of sensor goes to pin 6 of arduino
- echo of sensor goes to pin 7 of arduino

(5) SETTING UP THE CODE


The program lights the LEDs up according to how close something is to the sensor.

WORKING PROJECT


When the set-up has been completed, and the ultrasonic sensor is connected to the bin under observation, it begins to radiate ultrasonic waves. We set a pre-defined height at which the bin is full. Continuous observation of the bin is done by the sensor. If the garbage accumulated in the bin crosses the pre-defined limit, the LED lights up, indicating the requirement to empty the bin.

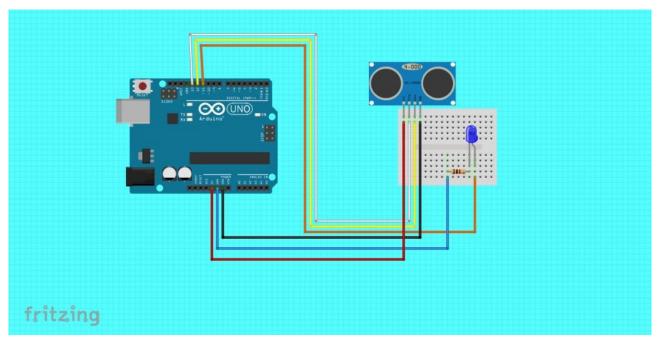

(Circuit Set-up)

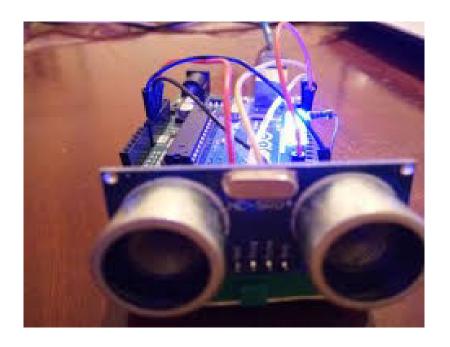

(LED litting up when threshold is crossed)

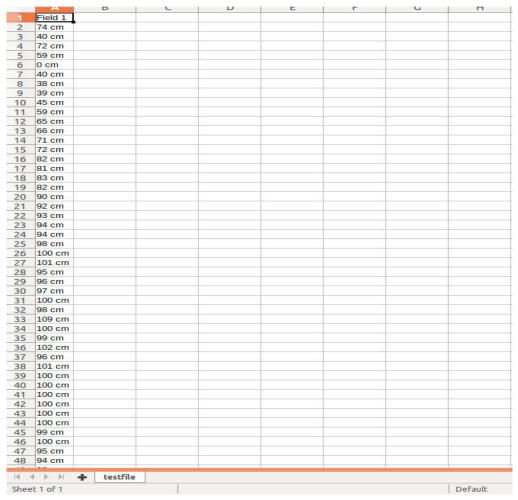

(Data of height being stored)



(Graph plotted)

CHALLENGES

That said there are a few complications that we thought would occur if we took this product on a big scale.

- Ensuring the Ultrasonic distance sensor are correctly placed. If the pile of dump increased in the middle the sensor could be giving misleading data.
- There could be liquid/water thrown in to the bin. The design needs to have water proof electronics and embedded software.
- The BIGGEST issue availability of 3G/4G Cellular networks(if real-time data were to be monitored).

(Help Source:https://www.instructables.com/id/Smart-Garbage-Monitoring-System-Using-Internet-of-/)