Arduino Board - Arduino UNO Rev3



ATmega328 (Microcontroller – bootloader UNO)




IC Socket 28 pin Narrow – N.14+14



Crystal 16.000 MHz





PCB (Cut small piece for only Atmega IC Socket wider range 3.5 cm * 6 cm)



Wires

PS/2
KEYBOARD
MOUSE TO
USB
CONVERTER

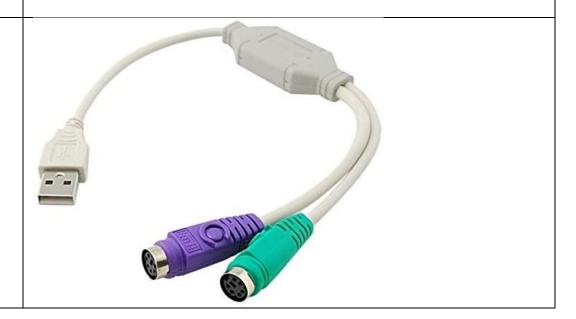

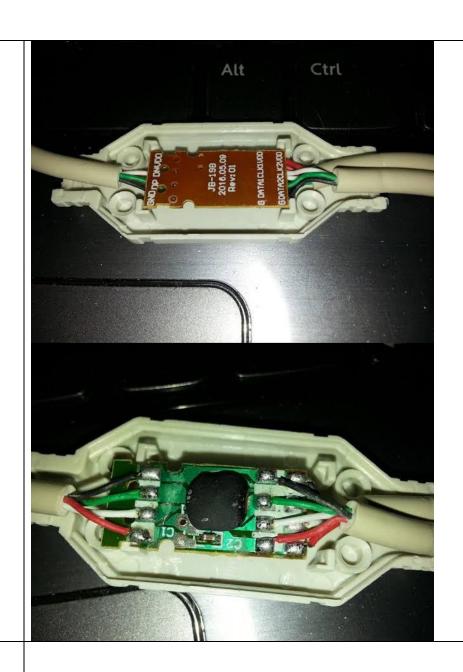

Connection wires, Tape, glue,