10 b) Simulate RIP using cisco packet tracer

Aim:


To Simulate RIP using 3 routers and 2 pcs cisco packet tracer.

procedure:

* create the topology with 3 routers and 2 pcs
* Connect the device using Straight cables.
* Assign the given IP address to both pcs
* Configure fast ethernet and Serial interface of all routers
* Enable interface using no shutdown.
* Set clock rate of 4000 and bandwidth 64 on DE Serial Interface.
* Enable RIP on all our router using router rip.
* Add directly connected network using the network command
* Test Connectivity using ping 20.0.0.8
* Use trace to 20.0.0.2 to verify the selected router
* Disconnected the direct cable - 0 - router

REDMI 13C 5G 19/10/2026 17:16

2 Link and router again to verify if select the alternate route.

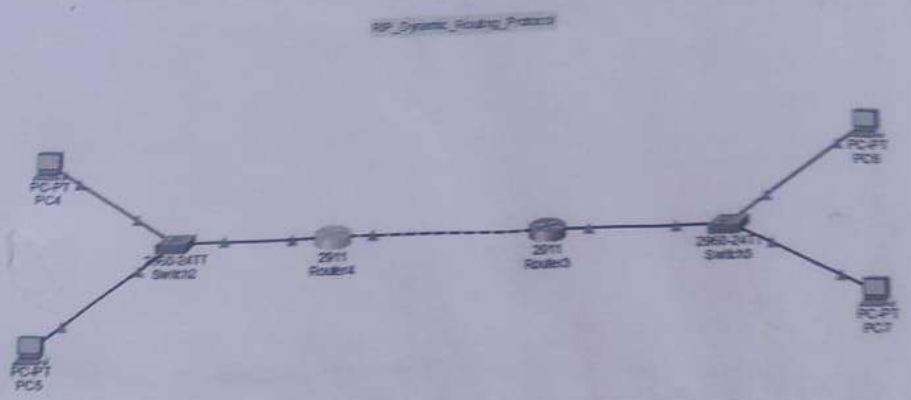





REDMI 13C 5G 19/10/2026 17:16

Result:

Thus, the Simulation of RIP using 3 routers and 3 CISCO packet trace has been successfully done.

REDMI 13C 5G 19/10/2026 17:16