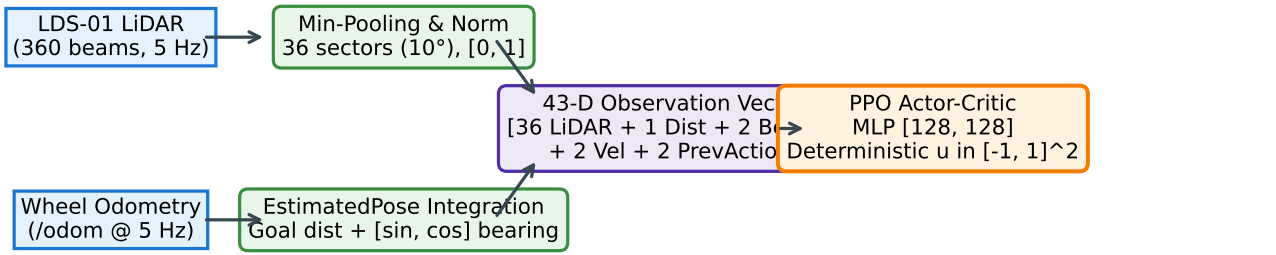
LDS-01 LiDAR
(360 beams, 5 Hz)
Min-Pooling & Norm
36 sectors (10°), [0, 1]
43-D Observation Vec
[36 LiDAR + 1 Dist + 2 B
+ 2 Vel + 2 PrevActio
PPO Actor-Critic
MLP [128, 128]
Deterministic u in [-1, 1]^2
Wheel Odometry
(/odom @ 5 Hz)
EstimatedPose Integration
Goal dist + [sin, cos] bearing
Action Scaling: v in [0, 0.15] m/s, omega in [-0.6, 0.6] rad/s -> /cmd_vel