




SoM connectors

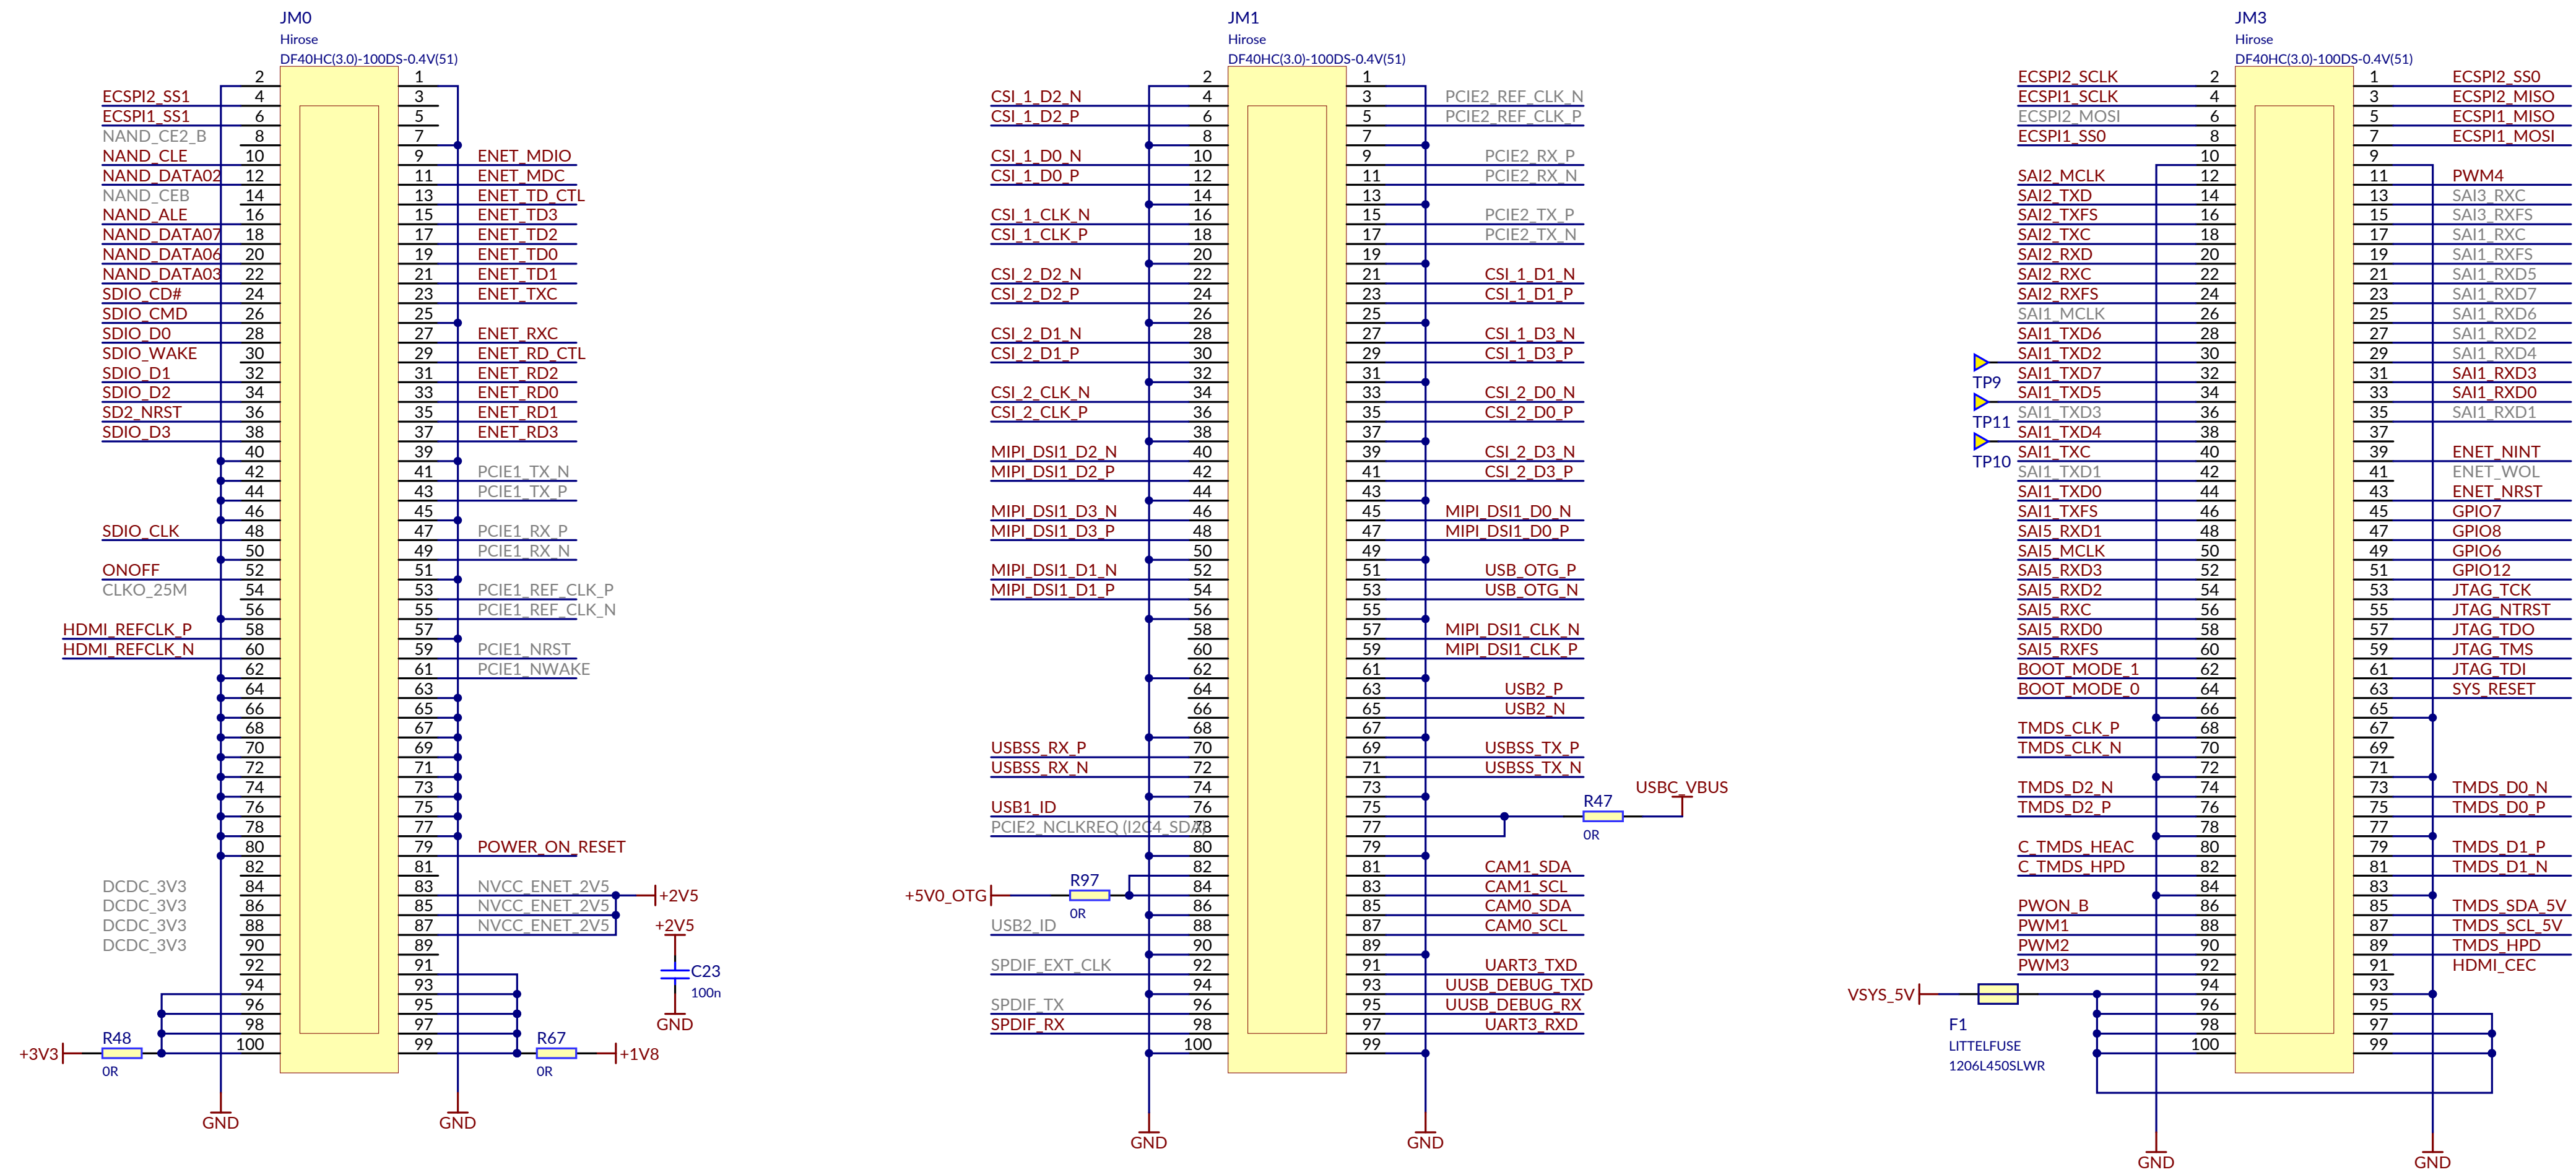


System buttons

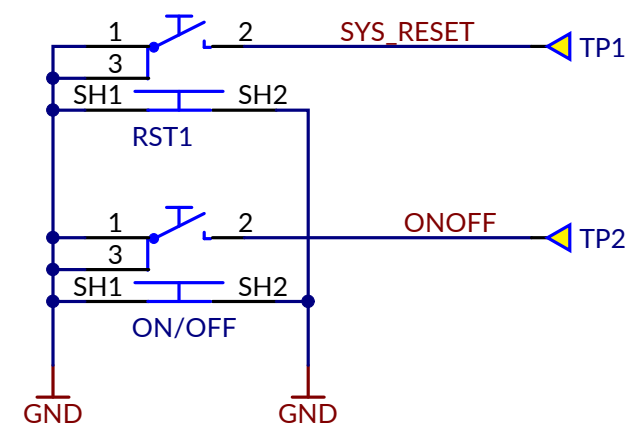

Boot mode

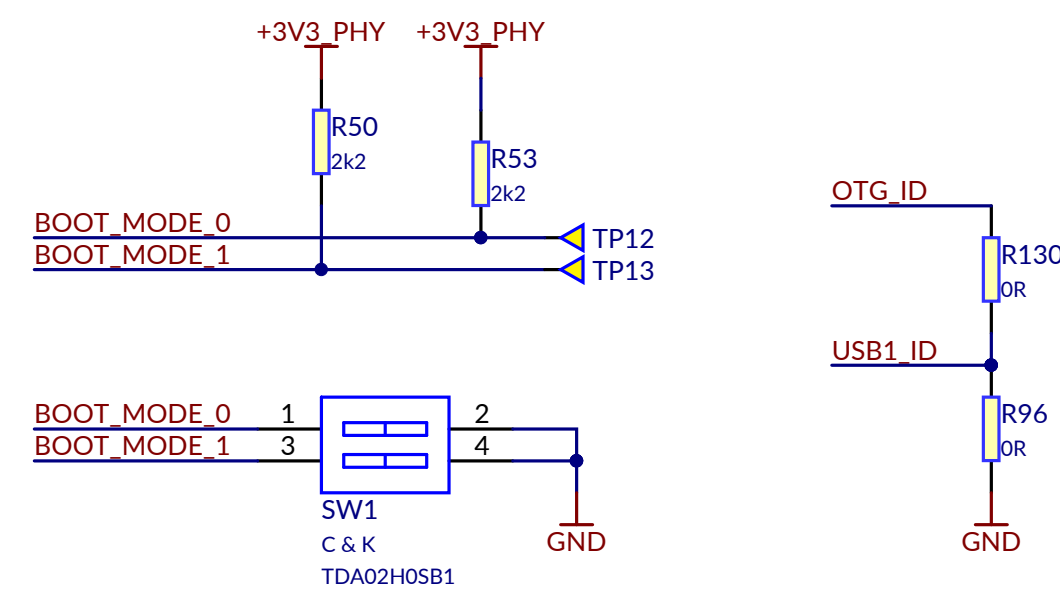



SoM model




HDMI reference clock

Capacitive coupling



HDMI connector

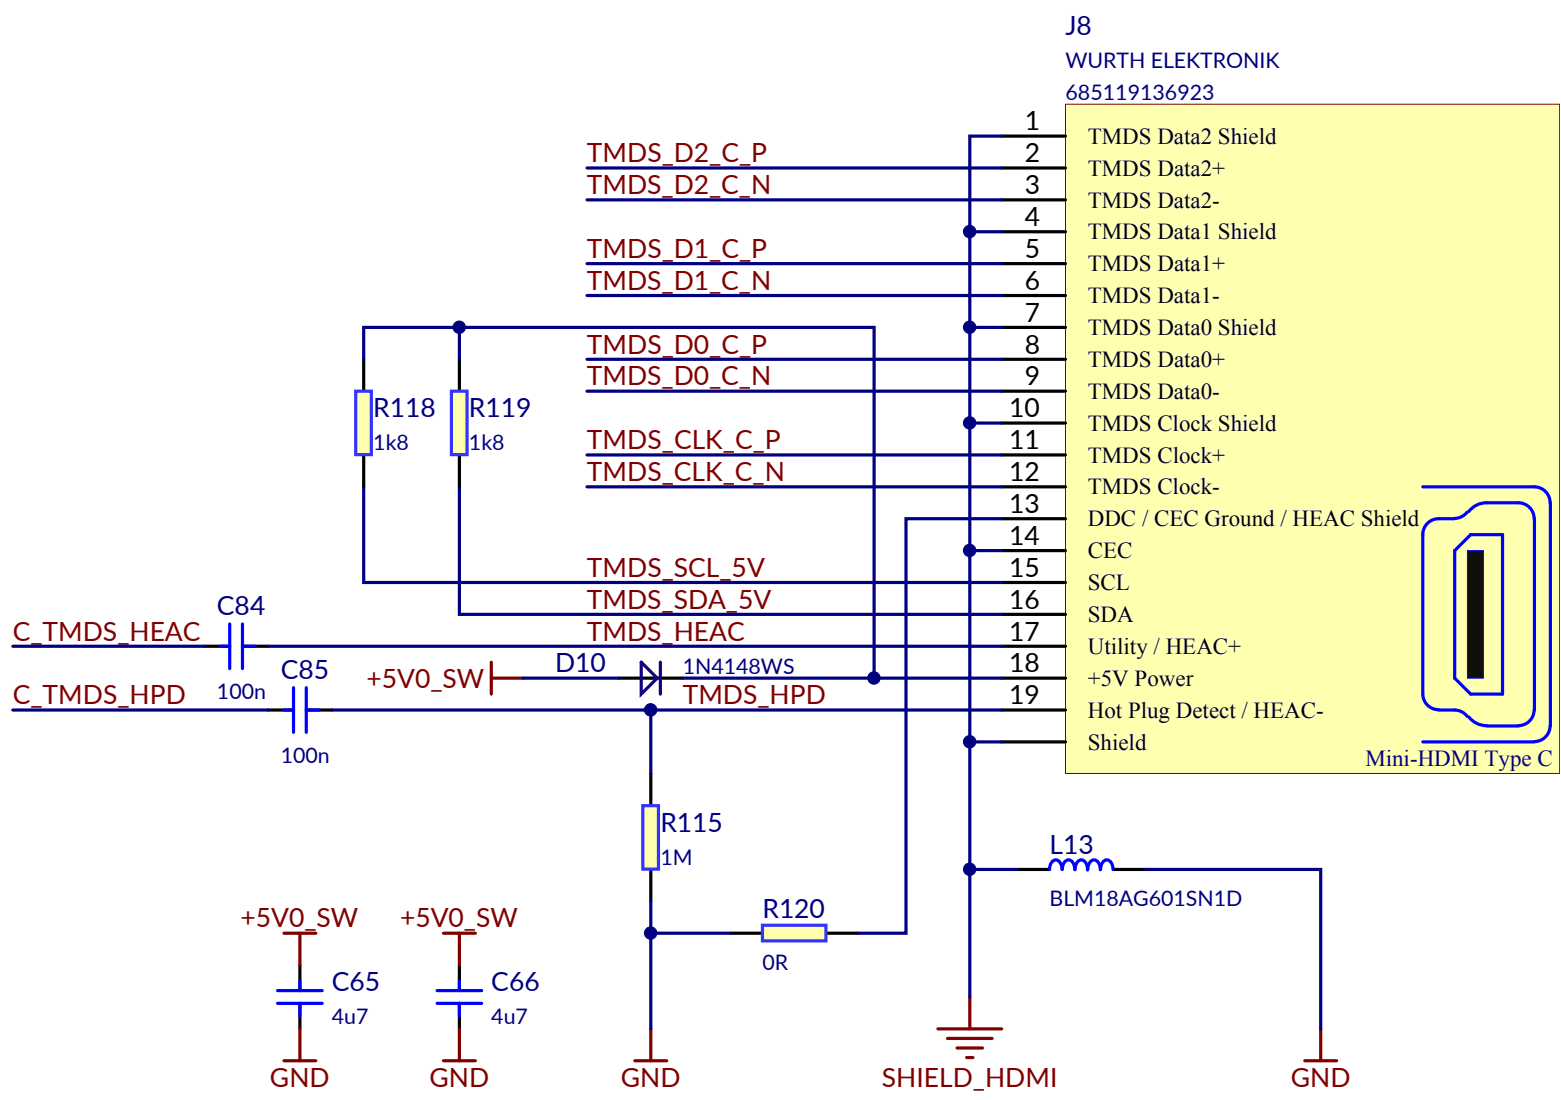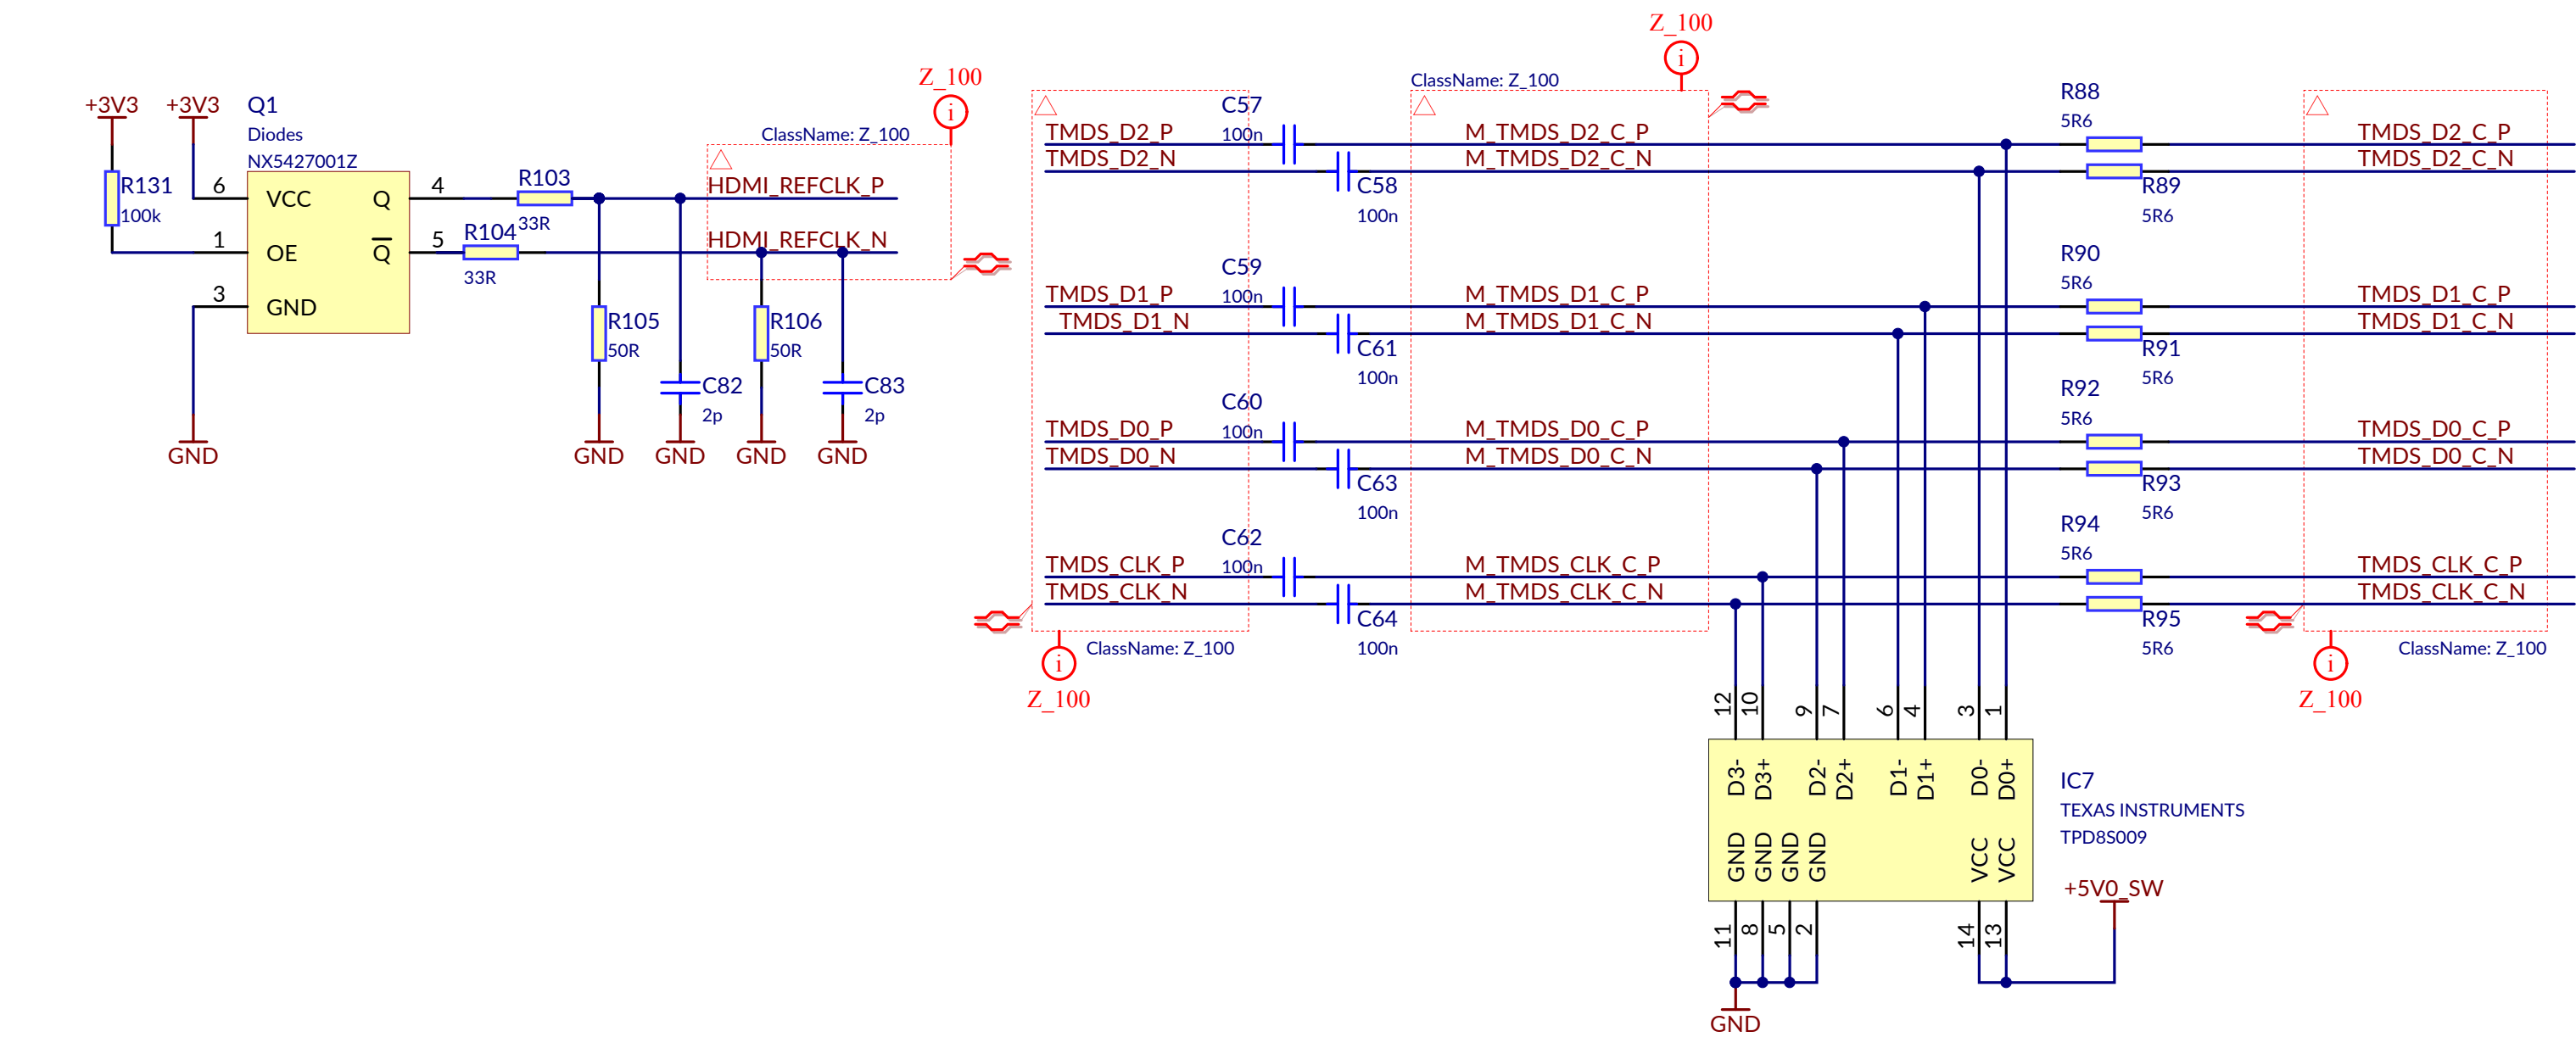


SD Card

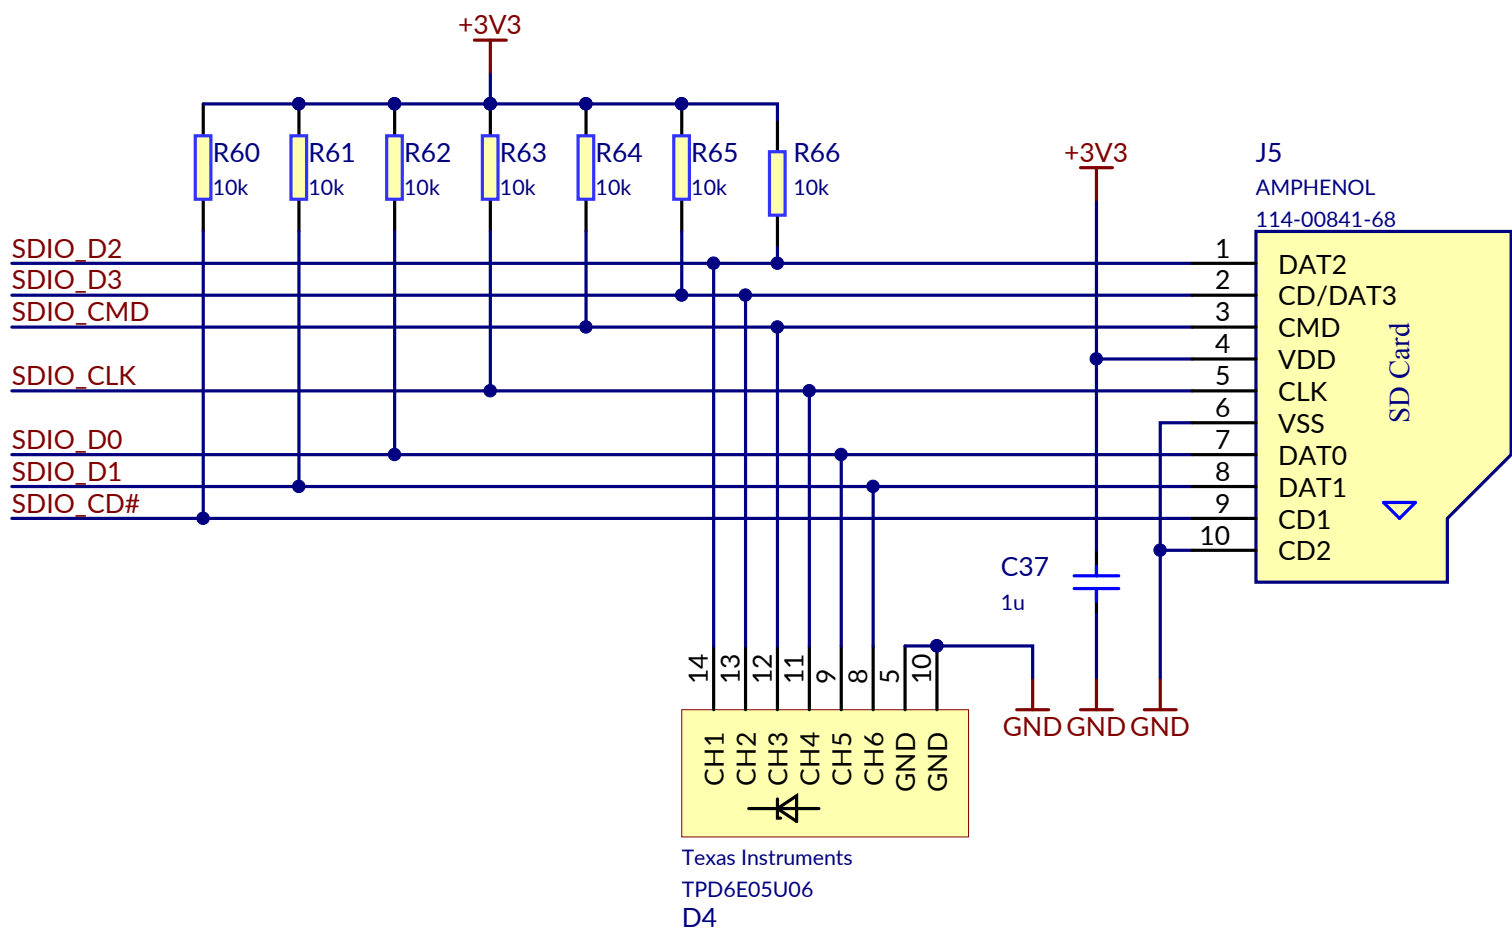


MIPI CSI-2 Camera Interface

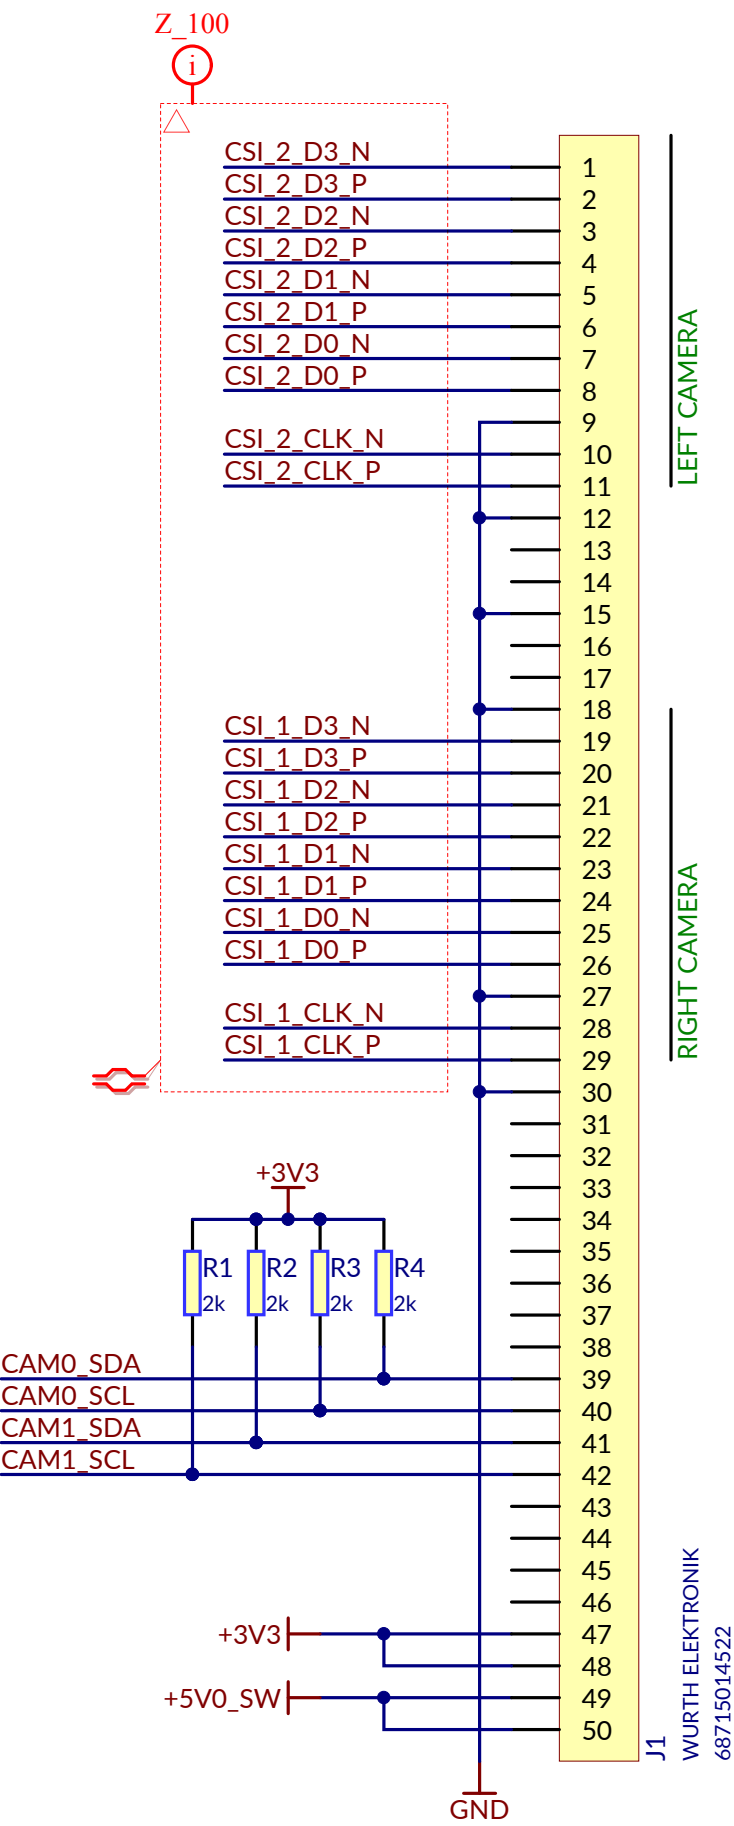


PHY configuration

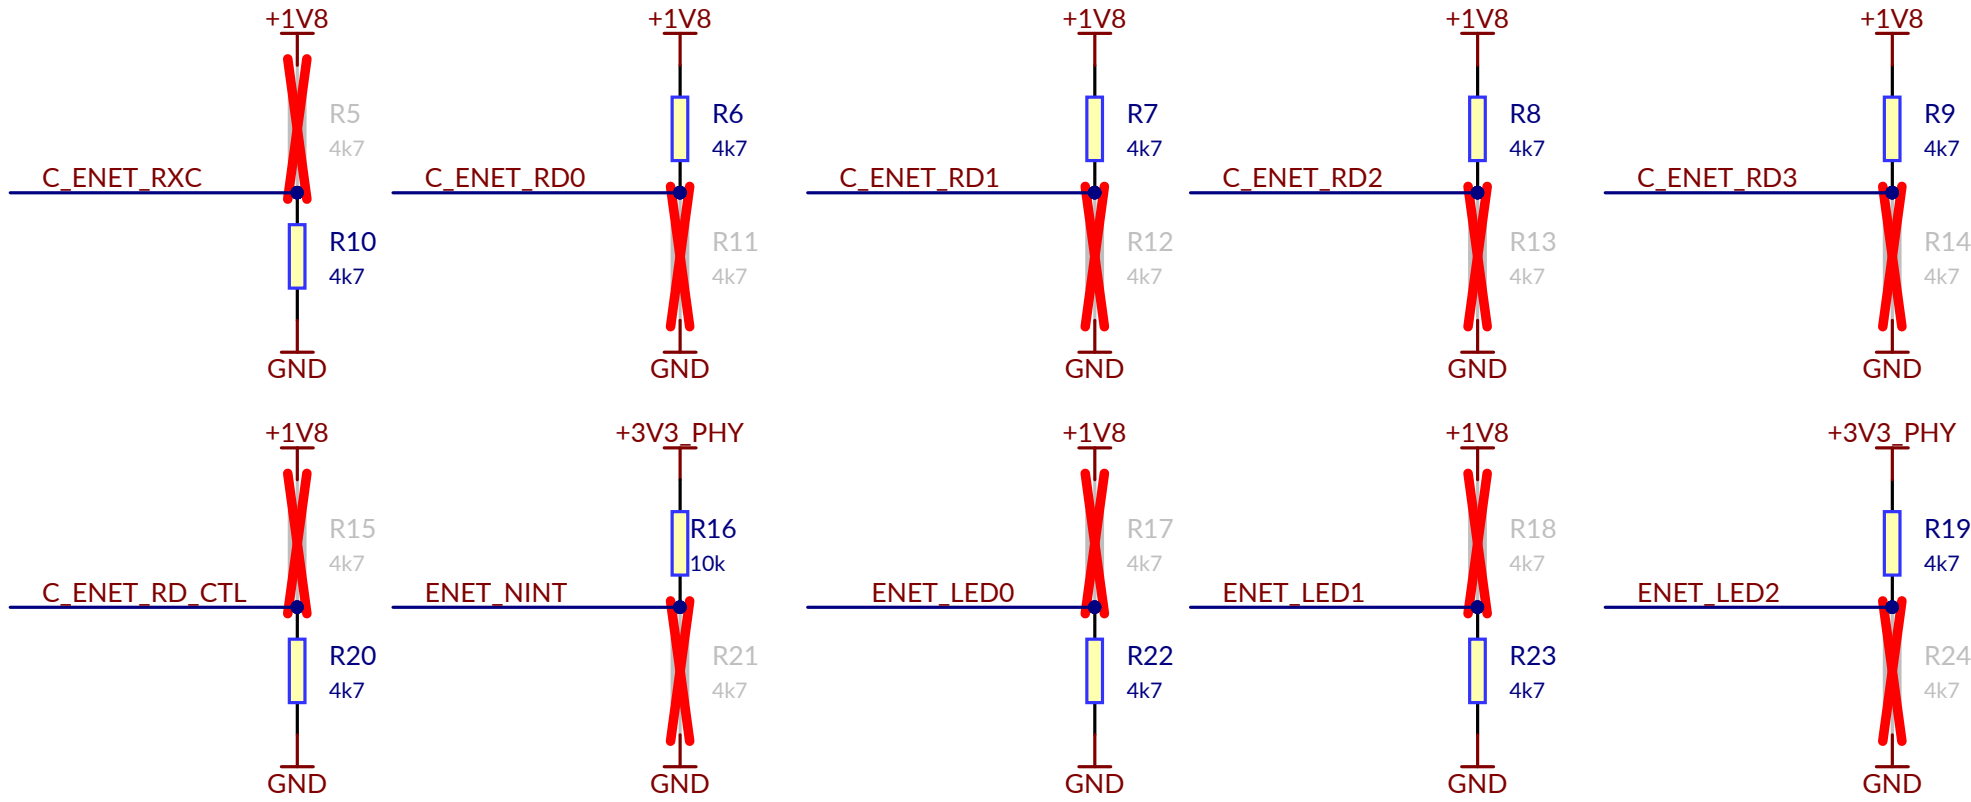


Supply filtering

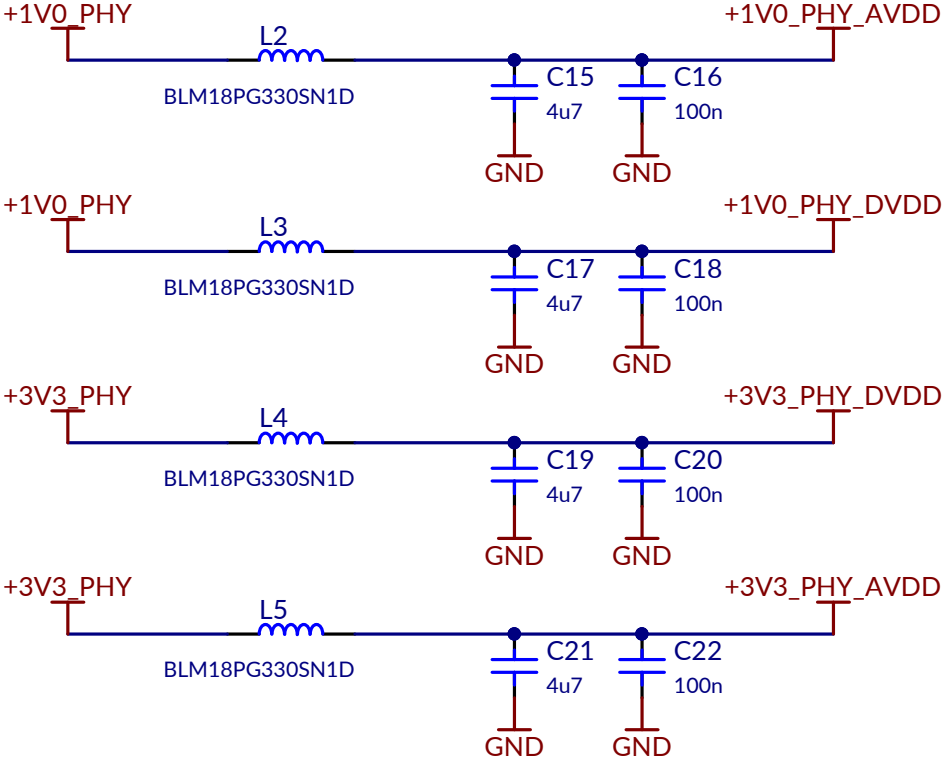



PHY controller

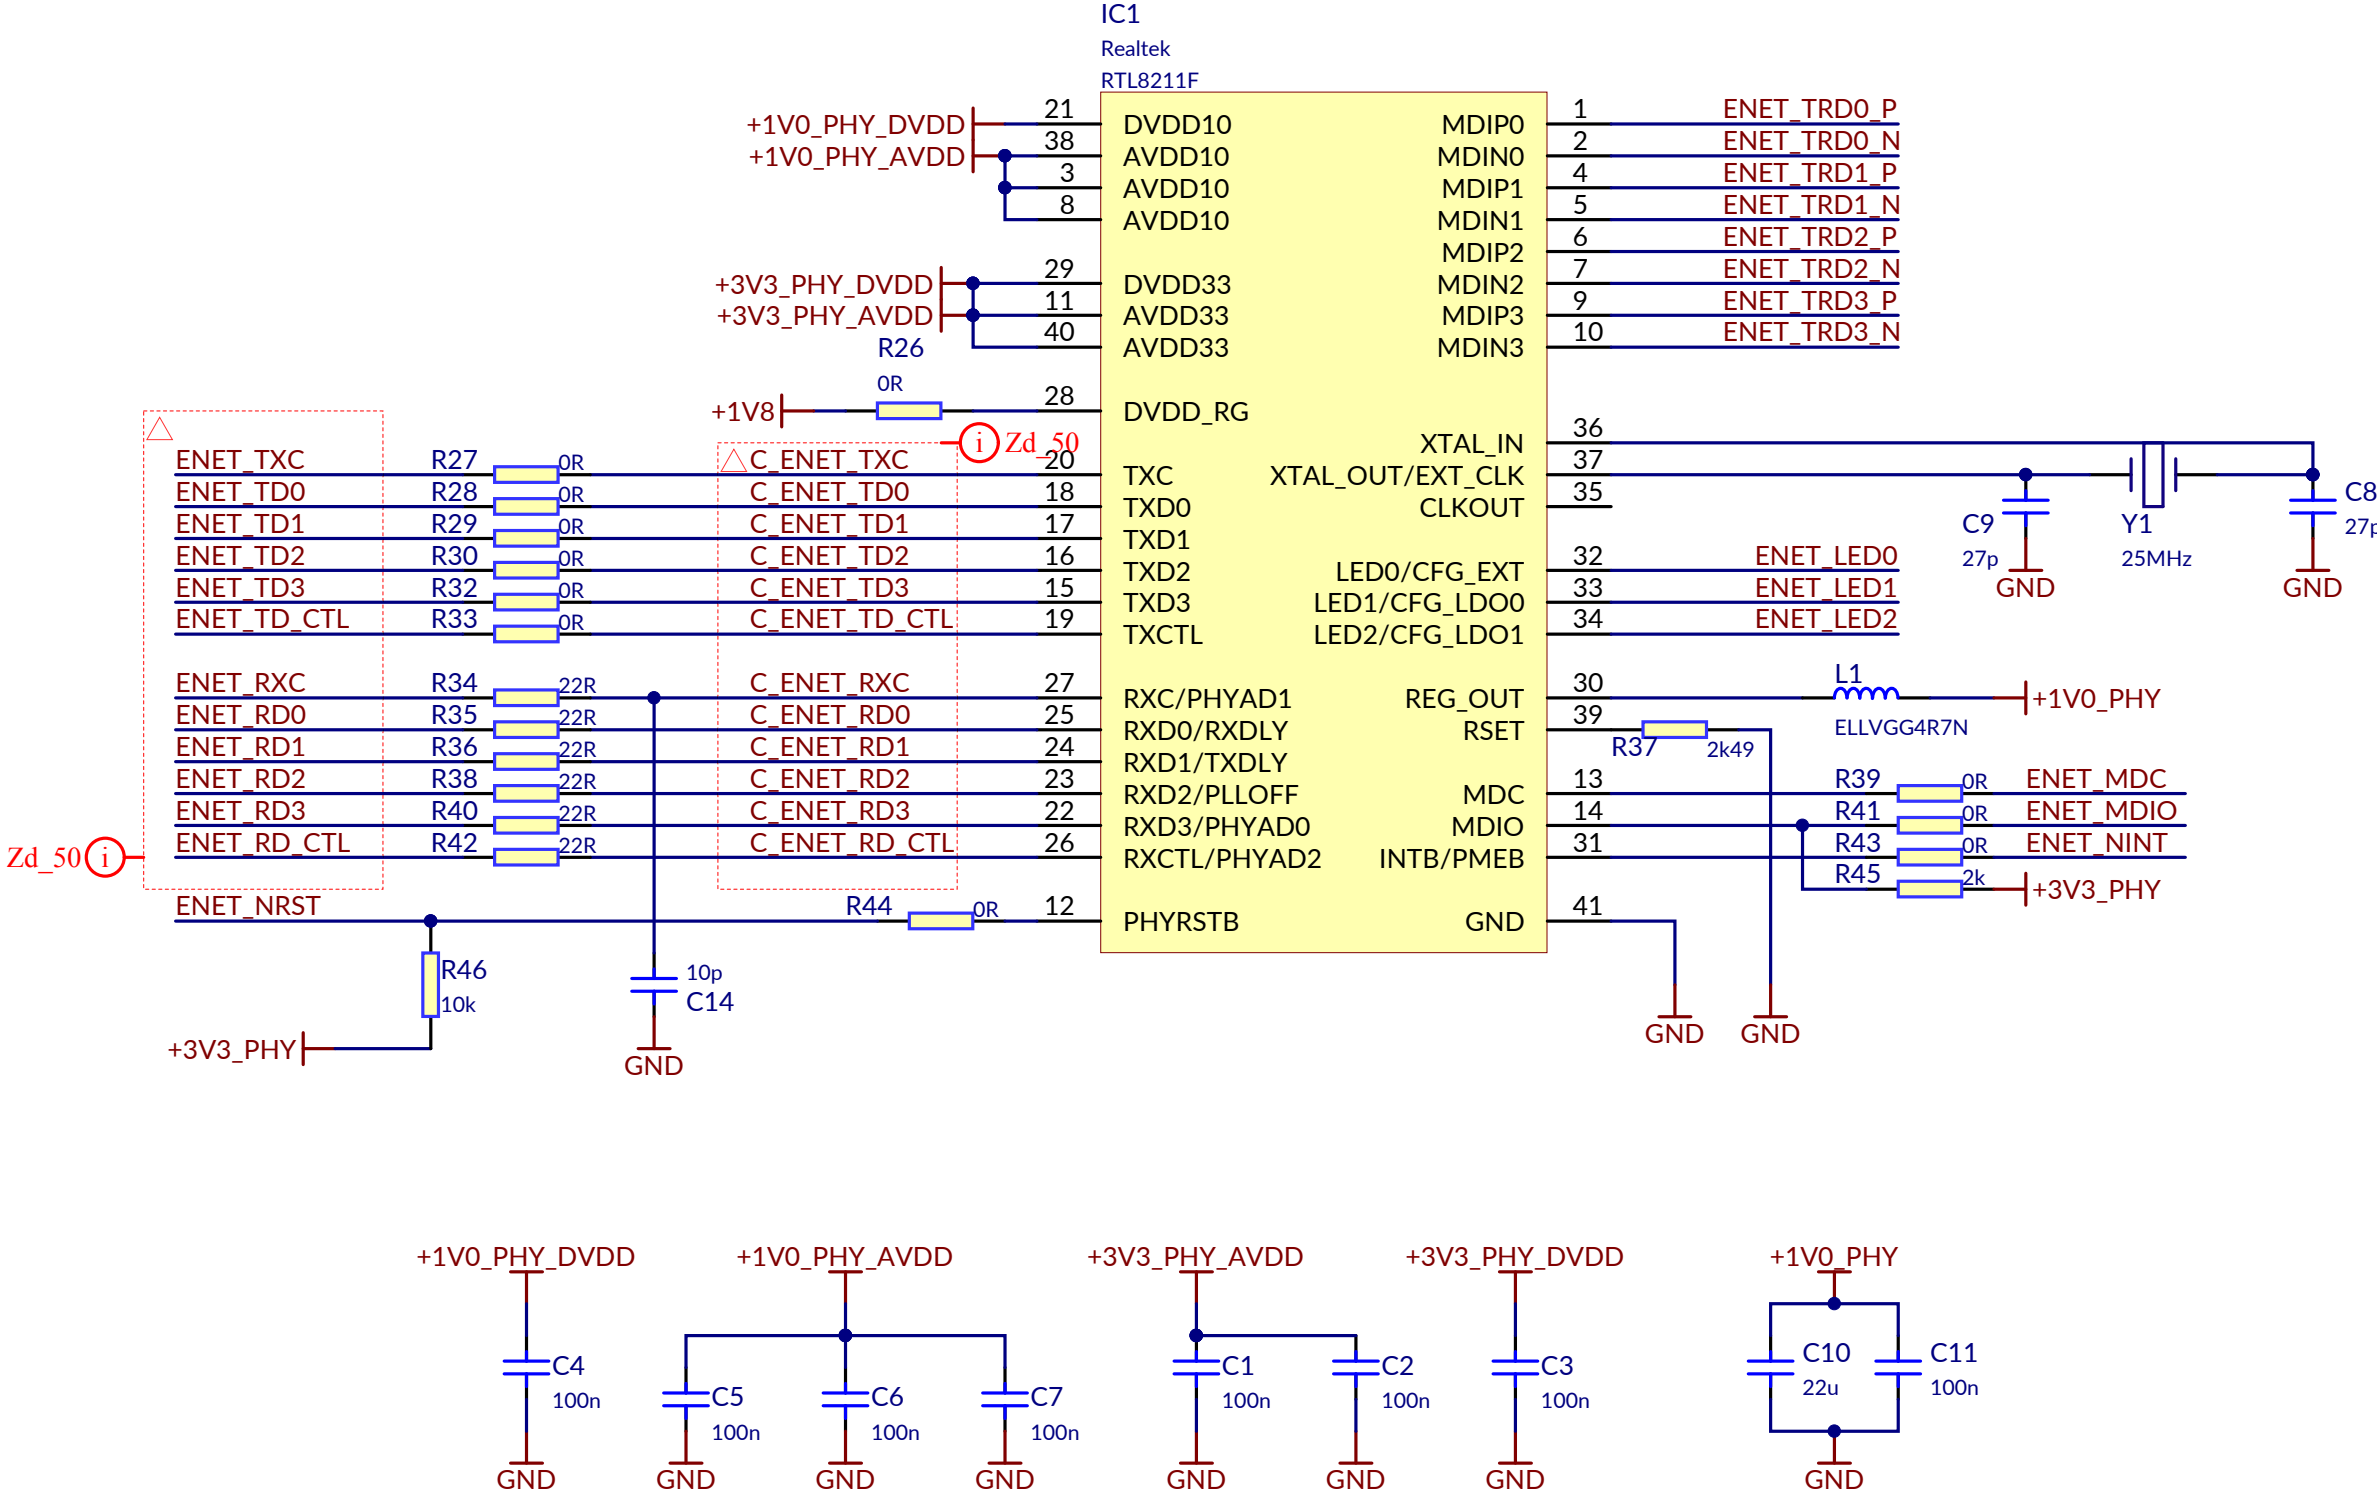

Ethernet connector

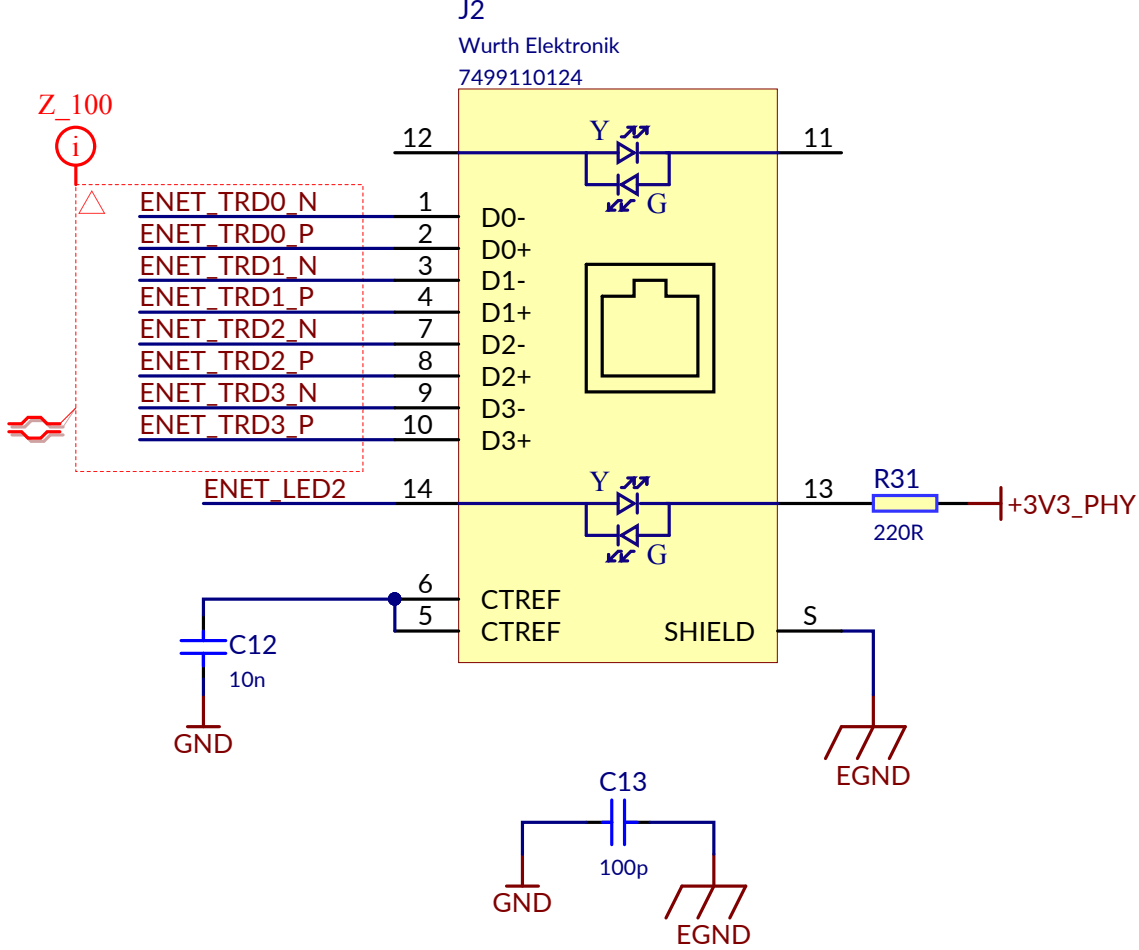

M.2 Interface

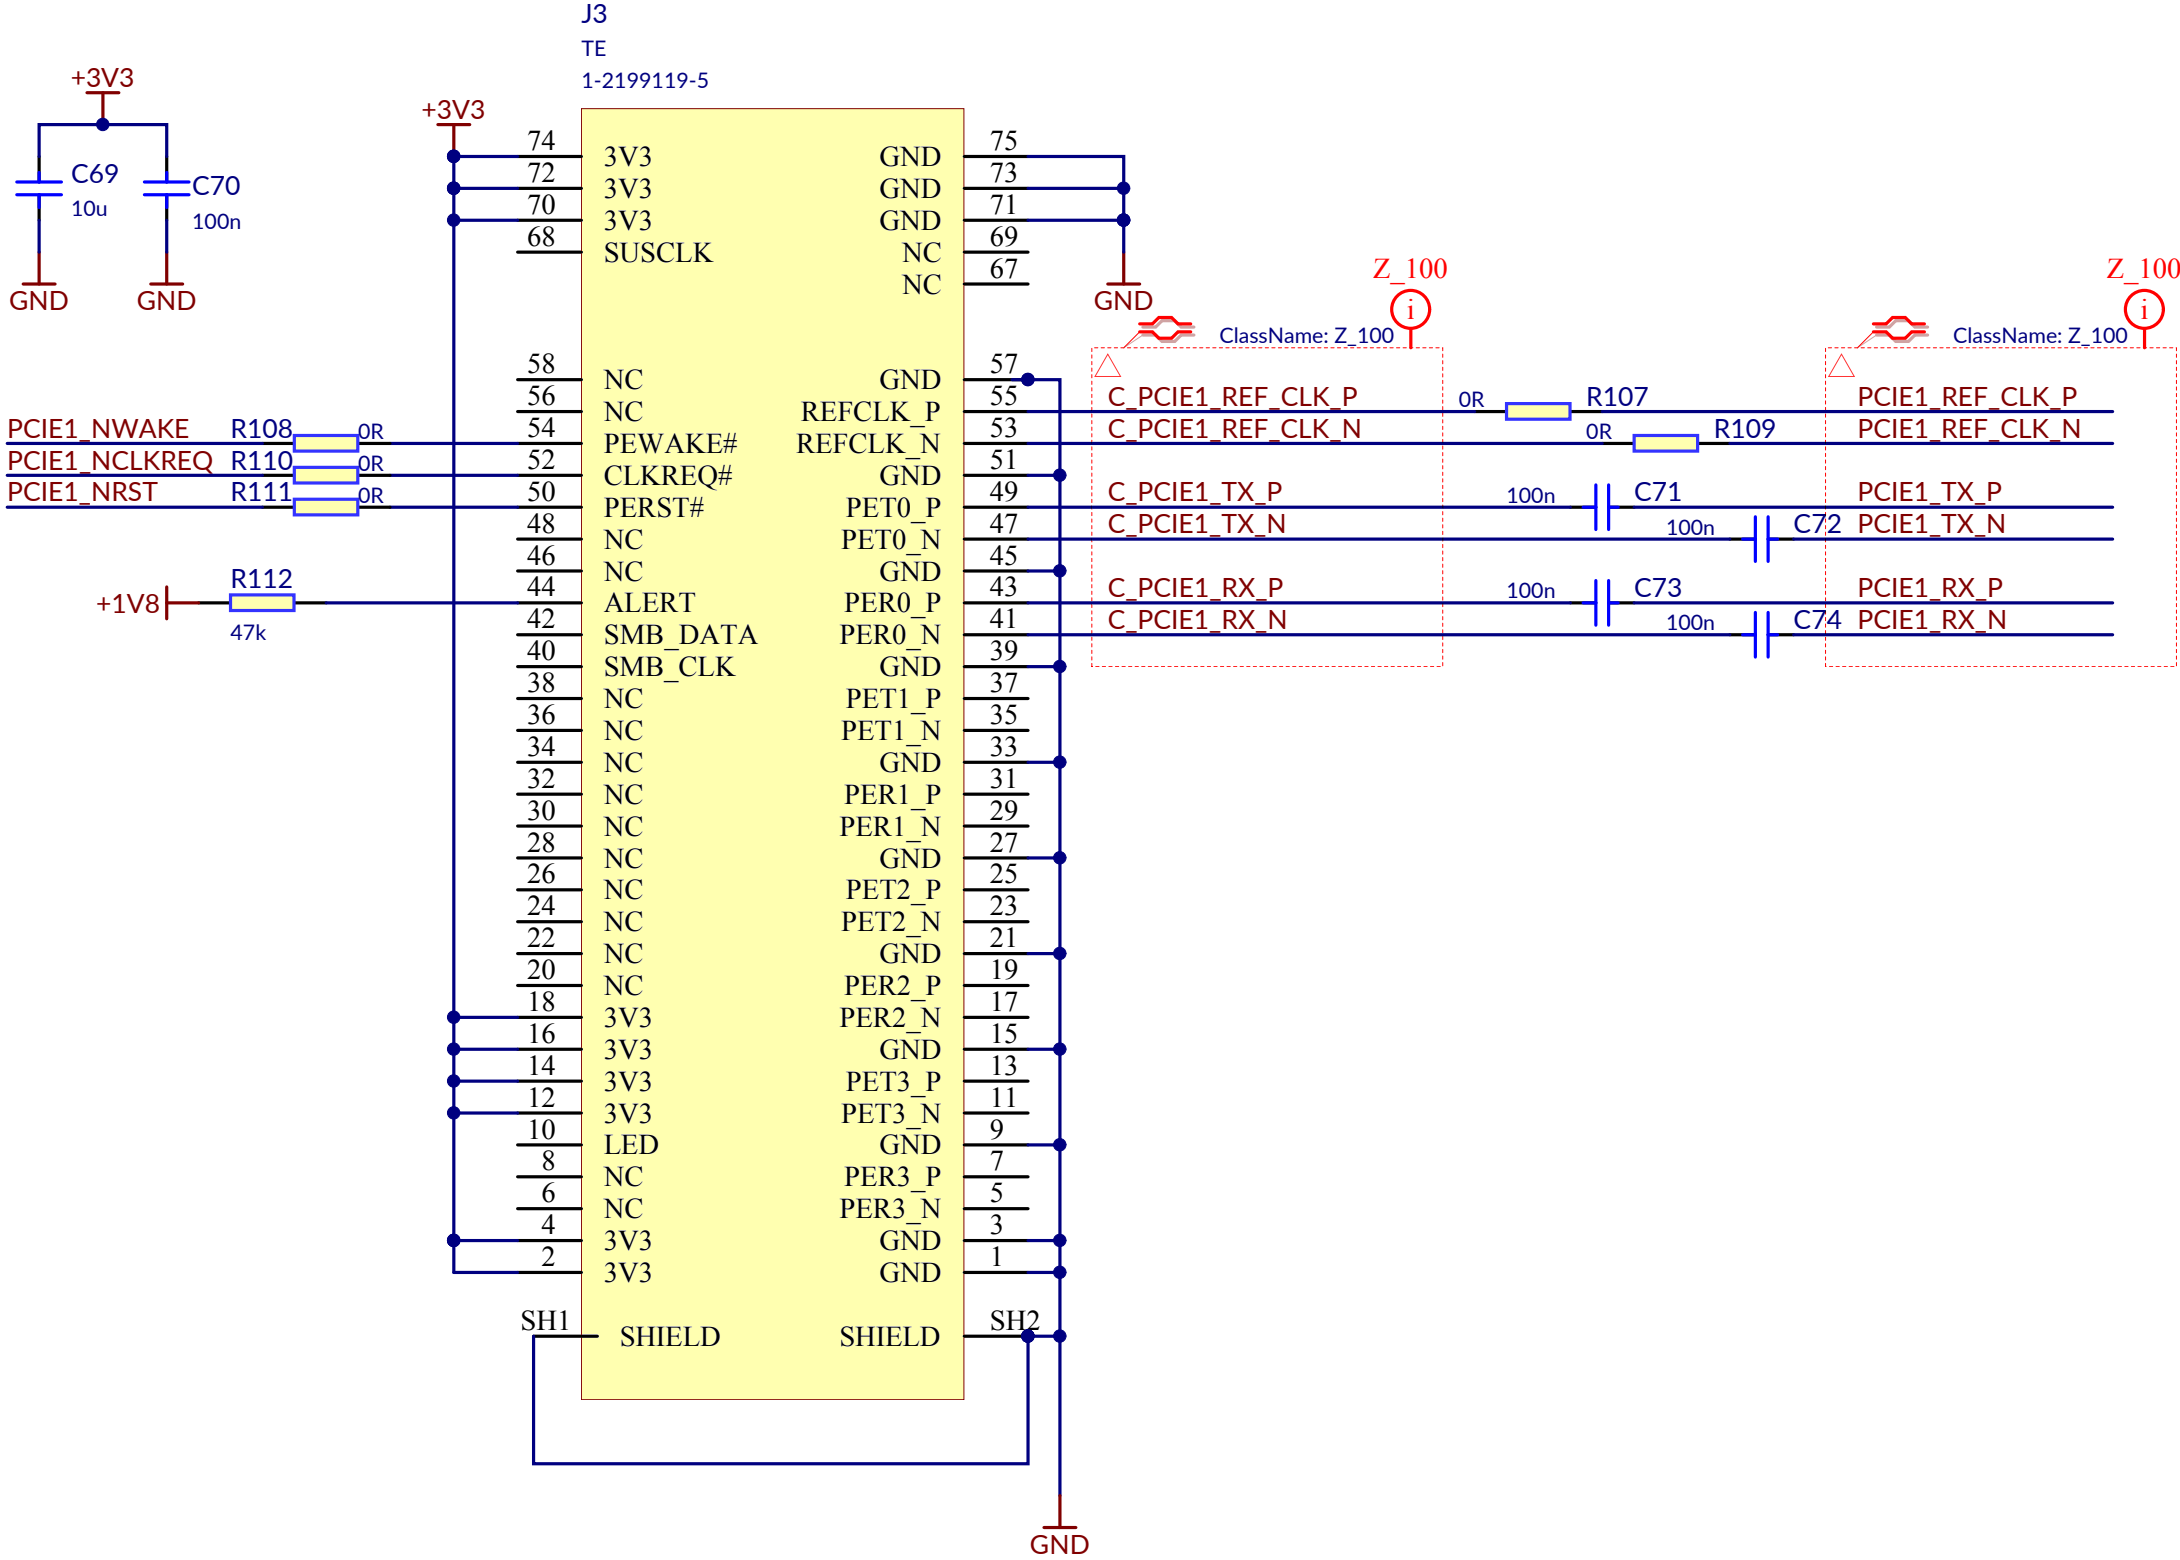




## A




## C




Main DC/DC 5V (5A)

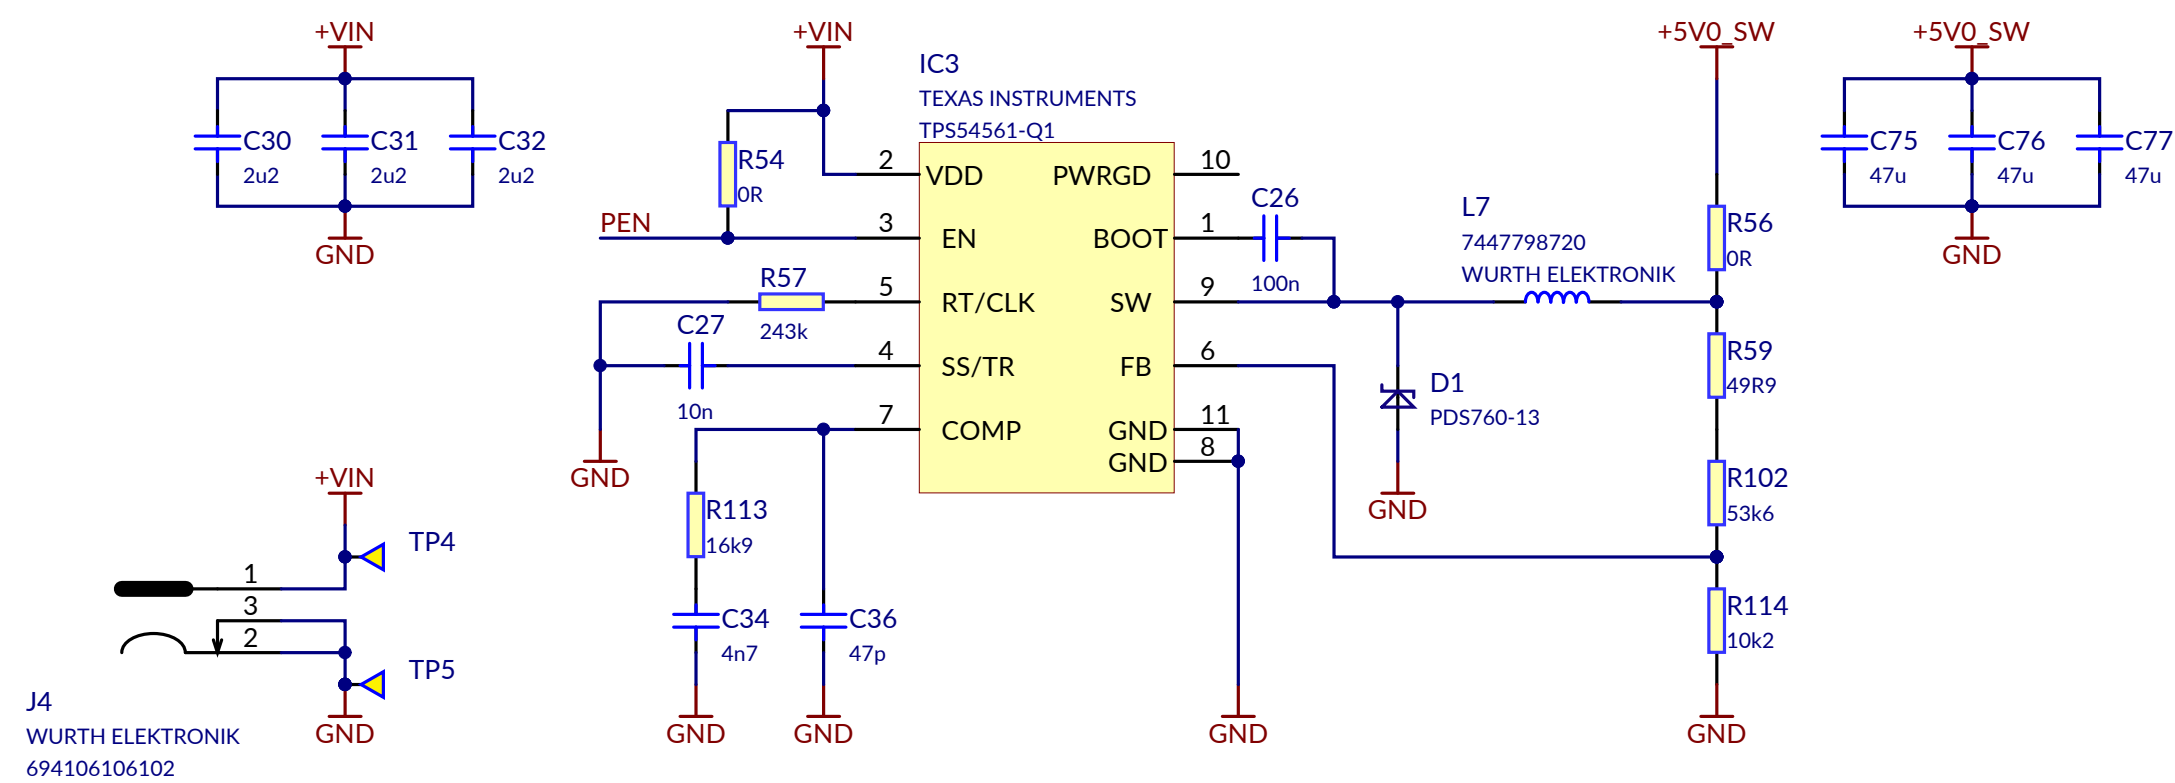

System 3V3 (1A)

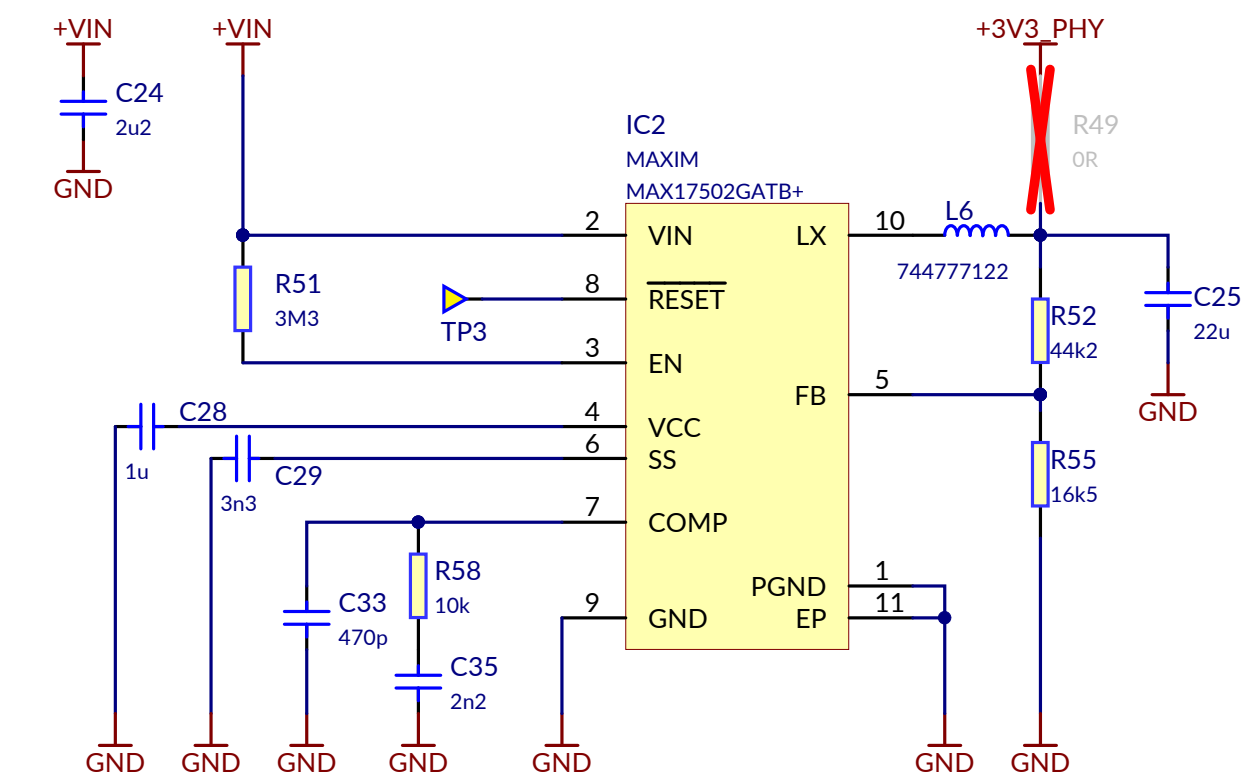

System 1V8 (200mA)

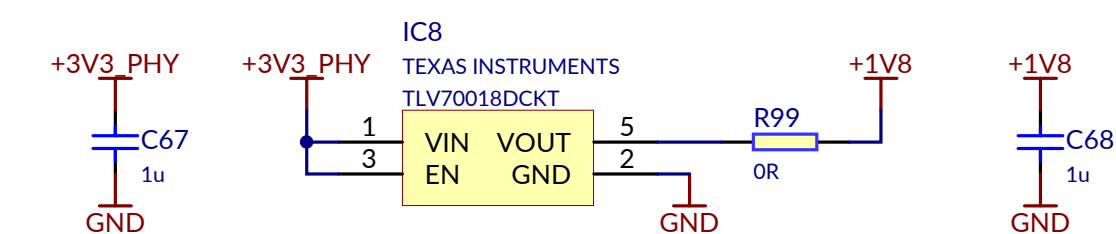

FAN

