



Concept of layering. OSI and TCP/IP Protocol Stacks; Basics of packet, circuit and virtual circuit-switching; Data link layer: framing, error detection, Medium Access Control, Ethernet bridging; Routing protocols: shortest path, flooding, distance vector and link state routing; Fragmentation and IP addressing, IPv4, CIDR notation, Basics of IP support protocols (ARP, DHCP, ICMP), Network Address Translation (NAT); Transport layer: flow control and congestion control, UDP, TCP, sockets; Application layer protocols: DNS, SMTP, HTTP, FTP, **Email**.

Mark Distribution in Previous GATE

Year	2025 - 1	2025 - 2	2024 - 1	2024 - 2	2023	2022	2021 - 1	2021 - 2	Minimum	Average	Maximum
1 Mark Count	2	4	3	3	2	2	1	1	1	2.25	4
2 Marks Count	3	1	3	3	3	4	4	3	1	3	4
Total Marks	8	6	9	9	8	10	9	7	6	8.25	10

4.0.1 GATE CSE 2024 | Set 1 | Question: 55



Consider sending an IP datagram of size 1420 bytes (including 20 bytes of IP header) from a sender to a receiver over a path of two links with a router between them. The first link (sender to router) has an MTU (Maximum Transmission Unit) size of 542 bytes, while the second link (router to receiver) has an MTU size of 360 bytes. The number of fragments that would be delivered at the receiver is _____.

gatecse2024-set1 numerical-answers computer-networks two-marks

Answer key

4.1 Application Layer Protocols (12)

4.1.1 Application Layer Protocols: GATE CSE 2008 | Question: 14, ISRO2016-74



What is the maximum size of data that the application layer can pass on to the TCP layer below?

- A. Any size
- B. 2^{16} bytes - size of TCP header
- C. 2^{16} bytes
- D. 1500 bytes

gatecse-2008 easy computer-networks application-layer-protocols isro2016

Answer key

4.1.2 Application Layer Protocols: GATE CSE 2011 | Question: 4



Consider the different activities related to email.

- m1 : Send an email from mail client to mail server
- m2 : Download an email from mailbox server to a mail client
- m3 : Checking email in a web browser

Which is the application level protocol used in each activity?

- A. m1 : HTTP m2 : SMTP m3 : POP
- B. m1 : SMTP m2 : FTP m3 : HTTP
- C. m1 : SMTP m2 : POP m3 : HTTP
- D. m1 : POP m2 : SMTP m3 : IMAP

gatecse-2011 computer-networks application-layer-protocols easy

Answer key

4.1.3 Application Layer Protocols: GATE CSE 2012 | Question: 10



The protocol data unit (PDU) for the application layer in the Internet stack is:

- A. Segment
- B. Datagram
- C. Message
- D. Frame

Answer key

4.1.4 Application Layer Protocols: GATE CSE 2016 Set 1 | Question: 25



Which of the following is/are example(s) of stateful application layer protocol?

- i. HTTP
- ii. FTP
- iii. TCP
- iv. POP3

- A. (i) and (ii) only B. (ii) and (iii) only C. (ii) and (iv) only D. (iv) only

gatecse-2016-set1 computer-networks application-layer-protocols normal

Answer key

4.1.5 Application Layer Protocols: GATE CSE 2019 | Question: 16



Which of the following protocol pairs can be used to send and retrieve e-mails (in that order)?

- A. IMAP, POP3 B. SMTP, POP3 C. SMTP, MIME D. IMAP, SMTP

gatecse-2019 computer-networks application-layer-protocols one-mark

Answer key

4.1.6 Application Layer Protocols: GATE CSE 2020 | Question: 25



Assume that you have made a request for a web page through your web browser to a web server. Initially the browser cache is empty. Further, the browser is configured to send HTTP requests in non-persistent mode. The web page contains text and five very small images. The minimum number of TCP connections required to display the web page completely in your browser is_____.

gatecse-2020 numerical-answers computer-networks application-layer-protocols one-mark

Answer key

4.1.7 Application Layer Protocols: GATE CSE 2022 | Question: 25



Consider the resolution of the domain name **www.gate.org.in** by a DNS resolver. Assume that no resource records are cached anywhere across the DNS servers and that iterative query mechanism is used in the resolution. The number of DNS query-response pairs involved in completely resolving the domain name is_____.

gatecse-2022 numerical-answers computer-networks one-mark application-layer-protocols

Answer key

4.1.8 Application Layer Protocols: GATE IT 2005 | Question: 25



Consider the three commands : PROMPT, HEAD and RCPT.

Which of the following options indicate a correct association of these commands with protocols where these are used?

- A. HTTP, SMTP, FTP B. FTP, HTTP, SMTP
C. HTTP, FTP, SMTP D. SMTP, HTTP, FTP

gateit-2005 computer-networks application-layer-protocols normal

Answer key

4.1.9 Application Layer Protocols: GATE IT 2005 | Question: 26



Traceroute reports a possible route that is taken by packets moving from some host *A* to some other host *B*. Which of the following options represents the technique used by traceroute to identify these hosts:

- A. By progressively querying routers about the next router on the path to *B* using ICMP packets, starting with the first router

- B. By requiring each router to append the address to the ICMP packet as it is forwarded to B . The list of all routers en-route to B is returned by B in an ICMP reply packet
- C. By ensuring that an ICMP reply packet is returned to A by each router en-route to B , in the ascending order of their hop distance from A
- D. By locally computing the shortest path from A to B

gateit-2005 computer-networks icmp application-layer-protocols normal

Answer key

4.1.10 Application Layer Protocols: GATE IT 2005 | Question: 77

Assume that "host1.mydomain.dom" has an IP address of 145.128.16.8. Which of the following options would be most appropriate as a subsequence of steps in performing the reverse lookup of 145.128.16.8 ? In the following options "NS" is an abbreviation of "nameserver".

- A. Query a NS for the root domain and then NS for the "dom" domains
- B. Directly query a NS for "dom" and then a NS for "mydomain.dom" domains
- C. Query a NS for in-addr.arpa and then a NS for 128.145.in-addr.arpa domains
- D. Directly query a NS for 145.in-addr.arpa and then a NS for 128.145.in-addr.arpa domains

gateit-2005 computer-networks normal application-layer-protocols

Answer key

4.1.11 Application Layer Protocols: GATE IT 2006 | Question: 18

HELO and PORT, respectively, are commands from the protocols:

- A. FTP and HTTP
- B. TELNET and POP3
- C. HTTP and TELNET
- D. SMTP and FTP

gateit-2006 computer-networks application-layer-protocols normal

Answer key

4.1.12 Application Layer Protocols: GATE IT 2008 | Question: 20

Provide the best matching between the entries in the two columns given in the table below:

I. Proxy Server	a. Firewall
II. Kazaa, DC++	b. Caching
III. Slip	c. P2P
IV. DNS	d. PPP

- A. I-a, II-d, III-c, IV-b
- B. I-b, II-d, III-c, IV-a
- C. I-a, II-c, III-d, IV-b
- D. I-b, II-c, III-d, IV-a

gateit-2008 computer-networks normal application-layer-protocols

Answer key

4.2

Arp (1)

4.2.1 Arp: GATE CSE 2025 | Set 2 | Question: 6

Consider the following statements:

- i. Address Resolution Protocol (ARP) provides a mapping from an IP address to the corresponding hardware (link-layer) address.
- ii. A single TCP segment from a sender S to a receiver R cannot carry both data from S to R and acknowledgement for a segment from R to S

Which one of the following is CORRECT?

- A. Both (i) and (ii) are TRUE
- B. (i) is TRUE and (ii) is FALSE

C. (i) is FALSE and (ii) is TRUE

D. Both (i) and (ii) are FALSE

gatecse2025-set2 computer-networks tcp arp easy one-mark

Answer key

4.3

Bit Stuffing (2)

4.3.1 Bit Stuffing: GATE CSE 2014 Set 3 | Question: 24



A bit-stuffing based framing protocol uses an 8-bit delimiter pattern of 01111110. If the output bit-string after stuffing is 01111100101, then the input bit-string is:

A. 0111110100

B. 0111110101

C. 0111111101

D. 0111111111

gatecse-2014-set3 computer-networks error-detection bit-stuffing

Answer key

4.3.2 Bit Stuffing: GATE IT 2004 | Question: 80



In a data link protocol, the frame delimiter flag is given by 0111. Assuming that bit stuffing is employed, the transmitter sends the data sequence 01110110 as

A. 01101011

B. 011010110

C. 011101100

D. 0110101100

gateit-2004 computer-networks network-flow normal bit-stuffing

Answer key

4.4

Bridges (3)

4.4.1 Bridges: GATE CSE 2004 | Question: 16



Which of the following is NOT true with respect to a transparent bridge and a router?

A. Both bridge and router selectively forward data packets

B. A bridge uses IP addresses while a router uses MAC addresses

C. A bridge builds up its routing table by inspecting incoming packets

D. A router can connect between a LAN and a WAN

gatecse-2004 computer-networks bridges normal


Answer key

4.4.2 Bridges: GATE CSE 2006 | Question: 82



Consider the diagram shown below where a number of LANs are connected by (transparent) bridges. In order to avoid packets looping through circuits in the graph, the bridges organize themselves in a spanning tree. First, the root bridge is identified as the bridge with the least serial number. Next, the root sends out (one or more) data units to enable the setting up of the spanning tree of shortest paths from the root bridge to each bridge.

Each bridge identifies a port (the root port) through which it will forward frames to the root bridge. Port conflicts are always resolved in favour of the port with the lower index value. When there is a possibility of multiple bridges forwarding to the same LAN (but not through the root port), ties are broken as follows: bridges closest to the root get preference and between such bridges, the one with the lowest serial number is preferred.

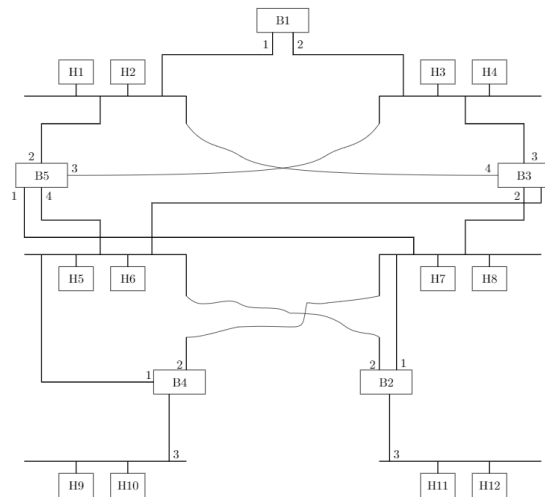

For the given connection of LANs by bridges, which one of the following choices represents the depth first traversal of the spanning tree of bridges?

- A. B1, B5, B3, B4, B2
- B. B1, B3, B5, B2, B4
- C. B1, B5, B2, B3, B4
- D. B1, B3, B4, B5, B2

gatecse-2006 computer-networks bridges normal

Answer key


4.4.3 Bridges: GATE CSE 2006 | Question: 83



Consider the diagram shown below where a number of LANs are connected by (transparent) bridges. In order to avoid packets looping through circuits in the graph, the bridges organize themselves in a spanning tree. First, the root bridge is identified as the bridge with the least serial number. Next, the root sends out (one or more) data

units to enable the setting up of the spanning tree of shortest paths from the root bridge to each bridge.

Each bridge identifies a port (the root port) through which it will forward frames to the root bridge. Port conflicts are always resolved in favour of the port with the lower index value. When there is a possibility of multiple bridges forwarding to the same LAN (but not through the root port), ties are broken as follows: bridges closest to the root get preference and between such bridges, the one with the lowest serial number is preferred.

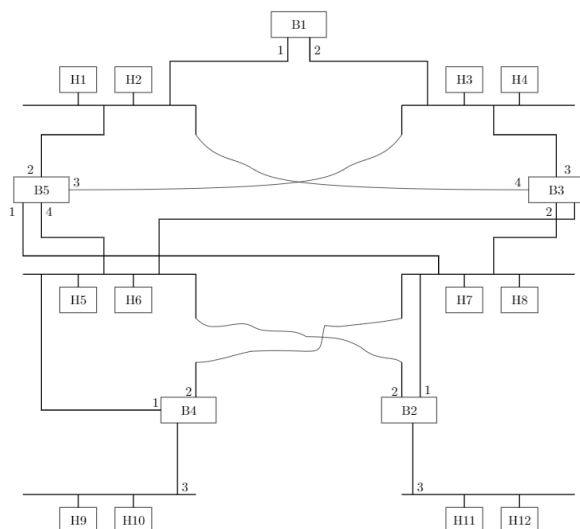

Consider the spanning tree $B1, B5, B3, B4, B2$ for the given connection of LANs by bridges, that represents the depth first traversal of the spanning tree of bridges. Let host $H1$ send out a broadcast ping packet. Which of the following options represents the correct forwarding table on $B3$?

a.	Hosts	Port
	H1, H2, H3, H4	3
	H5, H6, H9, H10	1
	H7, H8, H11, H12	2
b.	Hosts	Port
	H1, H2	4
	H3, H4	3
	H5, H6	1
	H7, H8, H9, H10, H11, H12	2
c.	Hosts	Port
	H3, H4	3
	H5, H6, H9, H10	1
	H1, H2	4
	H7, H8, H11, H12	2
d.	Hosts	Port
	H1, H2, H3, H4	3
	H5, H7, H9, H10	1
	H7, H8, H11, H12	4

gatecse-2006 computer-networks bridges normal

Answer key

4.5 CRC Polynomial (4)

4.5.1 CRC Polynomial: GATE CSE 2007 | Question: 68, ISRO2016-73



The message 11001001 is to be transmitted using the CRC polynomial $x^3 + 1$ to protect it from errors. The message that should be transmitted is:

- A. 11001001000 B. 11001001011 C. 11001010 D. 110010010011

gatecse-2007 computer-networks error-detection crc-polynomial normal isro2016

Answer key

4.5.2 CRC Polynomial: GATE CSE 2017 Set 1 | Question: 32



A computer network uses polynomials over $GF(2)$ for error checking with 8 bits as information bits and uses $x^3 + x + 1$ as the generator polynomial to generate the check bits. In this network, the message 01011011 is transmitted as:

- A. 01011011010 B. 01011011011 C. 01011011101 D. 01011011100

gatecse-2017-set1 computer-networks crc-polynomial normal

Answer key

4.5.3 CRC Polynomial: GATE CSE 2021 Set 2 | Question: 34



Consider the cyclic redundancy check (CRC) based error detecting scheme having the generator polynomial $X^3 + X + 1$. Suppose the message $m_4m_3m_2m_1m_0 = 11000$ is to be transmitted. Check bits $c_2c_1c_0$ are appended at the end of the message by the transmitter using the above CRC scheme. The transmitted bit string is denoted by $m_4m_3m_2m_1m_0c_2c_1c_0$. The value of the checkbit sequence $c_2c_1c_0$ is

- A. 101 B. 110 C. 100 D. 111

gatecse-2021-set2 computer-networks crc-polynomial two-marks

Answer key

4.5.4 CRC Polynomial: GATE IT 2005 | Question: 78



Consider the following message $M = 1010001101$. The cyclic redundancy check (CRC) for this message using the divisor polynomial $x^5 + x^4 + x^2 + 1$ is :

- A. 01110 B. 01011 C. 10101 D. 10110

gateit-2005 computer-networks crc-polynomial normal

Answer key

4.6 CSMA CD (6)

4.6.1 CSMA CD: GATE CSE 2015 Set 3 | Question: 6



Consider a CSMA/CD network that transmits data at a rate of 100 Mbps (10^8 bits per second) over a 1 km (kilometre) cable with no repeaters. If the minimum frame size required for this network is 1250 bytes, What is the signal speed (km/sec) in the cable?

- A. 8000 B. 10000 C. 16000 D. 20000

gatecse-2015-set3 computer-networks congestion-control csma-cd normal

Answer key

4.6.2 CSMA CD: GATE CSE 2016 Set 2 | Question: 53



A network has a data transmission bandwidth of 20×10^6 bits per second. It uses **CSMA/CD** in the **MAC** layer. The maximum signal propagation time from one node to another node is 40 microseconds. The minimum size of a frame in the network is _____ bytes.

gatecse-2016-set2 computer-networks csma-cd numerical-answers normal

Answer key

4.6.3 CSMA CD: GATE CSE 2018 | Question: 55



Consider a simple communication system where multiple nodes are connected by a shared broadcast medium (like Ethernet or wireless). The nodes in the system use the following carrier-sense based medium access protocol. A node that receives a packet to transmit will carrier-sense the medium for 5 units of time. If the node does not detect any other transmission, it starts transmitting its packet in the next time unit. If the node detects another transmission, it waits until this other transmission finishes, and then begins to carrier-sense for 5 time units again. Once they start to transmit, nodes do not perform any collision detection and continue transmission even if a collision occurs. All transmissions last for 20 units of time. Assume that the transmission signal travels at the speed of 10 meters per unit time in the medium.

Assume that the system has two nodes P and Q , located at a distance d meters from each other. P start transmitting a packet at time $t = 0$ after successfully completing its carrier-sense phase. Node Q has a packet to transmit at time $t = 0$ and begins to carrier-sense the medium.

The maximum distance d (in meters, rounded to the closest integer) that allows Q to successfully avoid a collision between its proposed transmission and P 's ongoing transmission is _____.

gatecse-2018 computer-networks csma-cd numerical-answers two-marks

Answer key

4.6.4 CSMA CD: GATE IT 2005 | Question: 27



Which of the following statements is TRUE about CSMA/CD:

- A. IEEE 802.11 wireless LAN runs CSMA/CD protocol
B. Ethernet is not based on CSMA/CD protocol
C. CSMA/CD is not suitable for a high propagation delay network like satellite network
D. There is no contention in a CSMA/CD network

Answer key

4.6.5 CSMA CD: GATE IT 2005 | Question: 71



A network with CSMA/CD protocol in the MAC layer is running at 1Gbps over a 1km cable with no repeaters. The signal speed in the cable is 2×10^8 m/sec. The minimum frame size for this network should be:

- A. 10000bits B. 10000bytes C. 5000 bits D. 5000bytes

Answer key

4.6.6 CSMA CD: GATE IT 2008 | Question: 65



The minimum frame size required for a CSMA/CD based computer network running at 1Gbps on a 200m cable with a link speed of 2×10^8 m/sec is:

- A. 125bytes B. 250bytes C. 500bytes D. None of the above

Answer key

4.7 Channel Utilization (1)

4.7.1 Channel Utilization: GATE CSE 2025 | Set 2 | Question: 26



Suppose we are transmitting frames between two nodes using Stop-and-Wait protocol. The frame size is 3000 bits. The transmission rate of the channel is 2000 bps (bits/second) and the propagation delay between the two nodes is 100 milliseconds. Assume that the processing times at the source and destination are negligible. Also, assume that the size of the acknowledgement packet is negligible. Which ONE of the following most accurately gives the channel utilization for the above scenario in percentage?

- A. 88.23 B. 93.75 C. 85.44 D. 66.67

Answer key

4.8 Communication (4)

4.8.1 Communication: GATE CSE 2012 | Question: 44



Consider a source computer (S) transmitting a file of size 10^6 bits to a destination computer (D) over a network of two routers (R_1 and R_2) and three links (L_1 , L_2 , and L_3). L_1 connects S to R_1 ; L_2 connects R_1 to R_2 ; and L_3 connects R_2 to D . Let each link be of length 100 km. Assume signals travel over each link at a speed of 10^8 meters per second. Assume that the link bandwidth on each link is 1 Mbps. Let the file be broken down into 1000 packets each of size 1000 bits. Find the total sum of transmission and propagation delays in transmitting the file from S to D ?

- A. 1005 ms B. 1010 ms C. 3000 ms D. 3003 ms

Answer key

4.8.2 Communication: GATE CSE 2022 | Question: 49



Consider a 100 Mbps link between an earth station (sender) and a satellite (receiver) at an altitude of 2100 km. The signal propagates at a speed of 3×10^8 m/s. The time taken (in milliseconds, rounded off to two decimal places) for the receiver to completely receive a packet of 1000 bytes transmitted by the sender is _____.

Answer key

4.8.3 Communication: GATE IT 2007 | Question: 62



Let us consider a statistical time division multiplexing of packets. The number of sources is 10. In a time unit, a source transmits a packet of 1000 bits. The number of sources sending data for the first 20 time units is 6, 9, 3, 7, 2, 2, 2, 3, 4, 6, 1, 10, 7, 5, 8, 3, 6, 2, 9, 5 respectively. The output capacity of multiplexer is 5000 bits per time unit. Then the average number of backlogged of packets per time unit during the given period is

- A. 5 B. 4.45 C. 3.45 D. 0

gateit-2007 computer-networks communication normal

Answer key

4.8.4 Communication: GATE IT 2007 | Question: 64



A broadcast channel has 10 nodes and total capacity of 10 Mbps. It uses polling for medium access. Once a node finishes transmission, there is a polling delay of 80 μ s to poll the next node. Whenever a node is polled, it is allowed to transmit a maximum of 1000 bytes. The maximum throughput of the broadcast channel is:

- A. 1 Mbps B. 100/11 Mbps C. 10 Mbps D. 100 Mbps

gateit-2007 computer-networks communication normal

Answer key

4.9 Congestion Control (6)

4.9.1 Congestion Control: GATE CSE 2008 | Question: 56



In the slow start phase of the TCP congestion algorithm, the size of the congestion window:

- A. does not increase B. increase linearly
C. increases quadratically D. increases exponentially

gatecse-2008 computer-networks congestion-control normal

Answer key

4.9.2 Congestion Control: GATE CSE 2012 | Question: 45



Consider an instance of TCP's Additive Increase Multiplicative Decrease (AIMD) algorithm where the window size at the start of the slow start phase is 2 MSS and the threshold at the start of the first transmission is 8 MSS. Assume that a timeout occurs during the fifth transmission. Find the congestion window size at the end of the tenth transmission.

- A. 8 MSS B. 14 MSS C. 7 MSS D. 12 MSS

gatecse-2012 computer-networks congestion-control normal

Answer key

4.9.3 Congestion Control: GATE CSE 2014 Set 1 | Question: 27



Let the size of congestion window of a TCP connection be 32 KB when a timeout occurs. The round trip time of the connection is 100 msec and the maximum segment size used is 2 KB. The time taken (in msec) by the TCP connection to get back to 32 KB congestion window is _____.

gatecse-2014-set1 computer-networks tcp congestion-control numerical-answers normal

Answer key

4.9.4 Congestion Control: GATE CSE 2015 Set 1 | Question: 29



Consider a LAN with four nodes S_1, S_2, S_3 , and S_4 . Time is divided into fixed-size slots, and a node can begin its transmission only at the beginning of a slot. A collision is said to have occurred if more than one node transmits in the same slot. The probabilities of generation of a frame in a time slot by S_1, S_2, S_3 , and S_4 are

0.1, 0.2, 0.3 and 0.4 respectively. The probability of sending a frame in the first slot without any collision by any of these four stations is _____.

gatecse-2015-set1 computer-networks normal numerical-answers congestion-control

Answer key

4.9.5 Congestion Control: GATE CSE 2018 | Question: 14



Consider the following statements regarding the slow start phase of the TCP congestion control algorithm. Note that *cwnd* stands for the TCP congestion window and MSS window denotes the Maximum Segments Size:

- i. The *cwnd* increases by 2 MSS on every successful acknowledgment
- ii. The *cwnd* approximately doubles on every successful acknowledgment
- iii. The *cwnd* increases by 1 MSS every round trip time
- iv. The *cwnd* approximately doubles every round trip time

Which one of the following is correct?

- A. Only (ii) and (iii) are true
- B. Only (i) and (iii) are true
- C. Only (iv) is true
- D. Only (i) and (iv) are true

gatecse-2018 computer-networks tcp congestion-control normal one-mark

Answer key

4.9.6 Congestion Control: GATE IT 2005 | Question: 73



On a TCP connection, current congestion window size is Congestion Window = 4 KB. The window size advertised by the receiver is Advertise Window = 6 KB. The last byte sent by the sender is LastByteSent = 10240 and the last byte acknowledged by the receiver is LastByteAcked = 8192. The current window size at the sender is:

- A. 2048 bytes
- B. 4096 bytes
- C. 6144 bytes
- D. 8192 bytes

gateit-2005 computer-networks congestion-control normal


Answer key

4.10 Distance Vector Routing (8)

4.10.1 Distance Vector Routing: GATE CSE 2010 | Question: 54



Consider a network with 6 routers **R1** to **R6** connected with links having weights as shown in the following diagram.

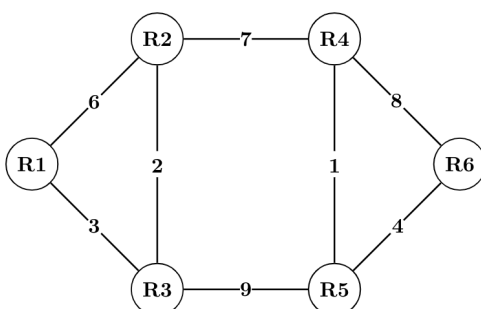

All the routers use the distance vector based routing algorithm to update their routing tables. Each router starts with its routing table initialized to contain an entry for each neighbor with the weight of the respective connecting link. After all the routing tables stabilize, how many links in the network will never be used for carrying any data?

- A. 4
- B. 3
- C. 2
- D. 1


gatecse-2010 computer-networks routing distance-vector-routing normal

Answer key

4.10.2 Distance Vector Routing: GATE CSE 2010 | Question: 55



Consider a network with 6 routers $R1$ to $R6$ connected with links having weights as shown in the following diagram.

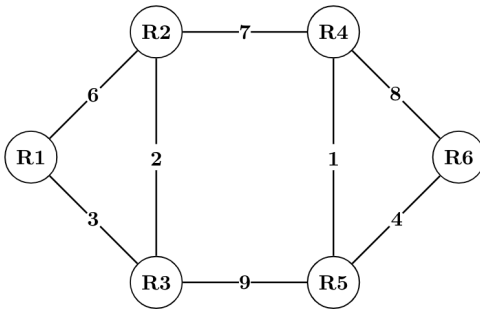

Suppose the weights of all unused links are changed to 2 and the distance vector algorithm is used again until all routing tables stabilize. How many links will now remain unused?

- A. 0 B. 1 C. 2 D. 3


gatecse-2010 computer-networks routing distance-vector-routing normal

Answer key

4.10.3 Distance Vector Routing: GATE CSE 2011 | Question: 52



Consider a network with five nodes, $N1$ to $N5$, as shown as below.

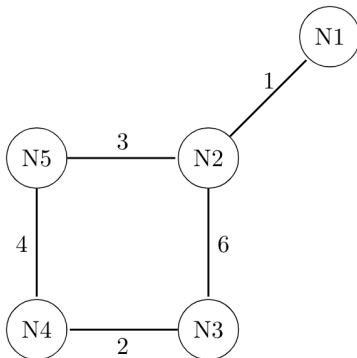

The network uses a Distance Vector Routing protocol. Once the routes have been stabilized, the distance vectors at different nodes are as follows.

N1: (0, 1, 7, 8, 4)

N2: (1, 0, 6, 7, 3)

N3: (7, 6, 0, 2, 6)

N4: (8, 7, 2, 0, 4)

N5: (4, 3, 6, 4, 0)

Each distance vector is the distance of the best known path at that instance to nodes, $N1$ to $N5$, where the distance to itself is 0. Also, all links are symmetric and the cost is identical in both directions. In each round, all nodes exchange their distance vectors with their respective neighbors. Then all nodes update their distance vectors. In between two rounds, any change in cost of a link will cause the two incident nodes to change only that entry in their distance vectors.

The cost of link $N2 - N3$ reduces to 2 (in both directions). After the next round of updates, what will be the new distance vector at node, $N3$?

- A. (3, 2, 0, 2, 5) B. (3, 2, 0, 2, 6)
C. (7, 2, 0, 2, 5) D. (7, 2, 0, 2, 6)


gatecse-2011 computer-networks routing distance-vector-routing normal

Answer key

4.10.4 Distance Vector Routing: GATE CSE 2011 | Question: 53



Consider a network with five nodes, $N1$ to $N5$, as shown as below.

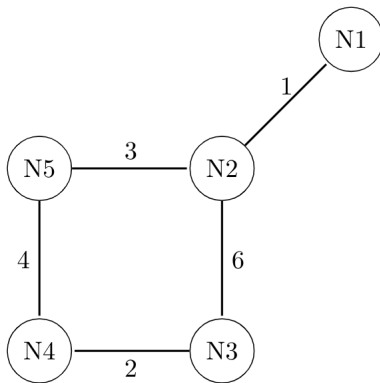

The network uses a Distance Vector Routing protocol. Once the routes have been stabilized, the distance vectors at different nodes are as follows.

- **N1:** (0, 1, 7, 8, 4)
- **N2:** (1, 0, 6, 7, 3)
- **N3:** (7, 6, 0, 2, 6)
- **N4:** (8, 7, 2, 0, 4)
- **N5:** (4, 3, 6, 4, 0)

Each distance vector is the distance of the best known path at that instance to nodes, $N1$ to $N5$, where the distance to itself is 0. Also, all links are symmetric and the cost is identical in both directions. In each round, all nodes exchange their distance vectors with their respective neighbors. Then all nodes update their distance vectors. In between two rounds, any change in cost of a link will cause the two incident nodes to change only that entry in their distance vectors.

The cost of link $N2 - N3$ reduces to 2 (in both directions). After the next round of updates, the link $N1 - N2$ goes down. $N2$ will reflect this change immediately in its distance vector as cost, ∞ . After the **NEXT ROUND** of update, what will be the cost to $N1$ in the distance vector of $N3$?

- A. 3 B. 9 C. 10 D. ∞


gatecse-2011 computer-networks routing distance-vector-routing normal

Answer key

4.10.5 Distance Vector Routing: GATE CSE 2021 Set 2 | Question: 45



Consider a computer network using the distance vector routing algorithm in its network layer. The partial topology of the network is shown below.



The objective is to find the shortest-cost path from the router R to routers P and Q . Assume that R does not initially know the shortest routes to P and Q . Assume that R has three neighbouring routers denoted as X , Y and Z . During one iteration, R measures its distance to its neighbours X , Y , and Z as 3, 2 and 5, respectively. Router R gets routing vectors from its neighbours that indicate that the distance to router P from routers X , Y and Z are 7, 6 and 5, respectively. The routing vector also indicates that the distance to router Q from routers X , Y and Z are 4, 6 and 8 respectively. Which of the following statement(s) is/are correct with respect to the new routing table of R , after updation during this iteration?

- A. The distance from R to P will be stored as 10
 B. The distance from R to Q will be stored as 7

- C. The next hop router for a packet from R to P is Y
D. The next hop router for a packet from R to Q is Z


gatecse-2021-set2 multiple-selects computer-networks distance-vector-routing two-marks

Answer key

4.10.6 Distance Vector Routing: GATE CSE 2022 | Question: 47



Consider a network with three routers P , Q , R shown in the figure below. All the links have cost of unity.



The routers exchange distance vector routing information and have converged on the routing tables, after which the link Q - R fails. Assume that P and Q send out routing updates at random times, each at the same average rate. The probability of a routing loop formation (*rounded off to one decimal place*) between P and Q , leading to count-to-infinity problem, is _____.

gatecse-2022 numerical-answers computer-networks routing distance-vector-routing two-marks

Answer key

4.10.7 Distance Vector Routing: GATE IT 2005 | Question: 29



Count to infinity is a problem associated with:

- A. link state routing protocol. B. distance vector routing protocol
C. DNS while resolving host name D. TCP for congestion control


gateit-2005 computer-networks routing distance-vector-routing normal

Answer key

4.10.8 Distance Vector Routing: GATE IT 2007 | Question: 60



For the network given in the figure below, the routing tables of the four nodes A , E , D and G are shown. Suppose that F has estimated its delay to its neighbors, A , E , D and G as 8, 10, 12 and 6 msec respectively and updates its routing table using distance vector routing technique.



Routing Table of A

A	0
B	40
C	14
D	17
E	21
F	9
G	24

Routing Table of D

A	20
B	8
C	30
D	0
E	14
F	7
G	22

Routing Table of E

A	24
B	27
C	7
D	20
E	0
F	11
G	22

Routing Table of G

A	21
B	24
C	22
D	19
E	22
F	10
G	0

A.

A	8
B	20
C	17
D	12
E	10
F	0
G	6

B.

A	21
B	8
C	7
D	19
E	14
F	0
G	22

C.

A	8
B	20
C	17
D	12
E	10
F	16
G	6

D.

A	8
B	8
C	7
D	12
E	10
F	0
G	6

gateit-2007 computer-networks distance-vector-routing normal

Answer key

4.11

Error Detection (10)

4.11.1 Error Detection: GATE CSE 1992 | Question: 01,ii



Consider a 3-bit error detection and 1-bit error correction hamming code for 4-bit data. The extra parity bits required would be _____ and the 3-bit error detection is possible because the code has a minimum distance of _____.

gate1992 computer-networks error-detection normal fill-in-the-blanks

Answer key

4.11.2 Error Detection: GATE CSE 1994 | Question: 9



Following 7 bit single error correcting hamming coded message is received.

7	6	5	4	3	2	1	bit No.
1	0	0	0	1	1	0	X

Determine if the message is correct (assuming that at most 1 bit could be corrupted). If the message contains an error find the bit which is erroneous and gives correct message.

gate1994 computer-networks error-detection hamming-code normal descriptive

Answer key

4.11.3 Error Detection: GATE CSE 1995 | Question: 1.12



What is the distance of the following code 000000, 010101, 000111, 011001, 111111?

A. 2

B. 3

C. 4

D. 1

gate1995 computer-networks error-detection normal

Answer key

4.11.4 Error Detection: GATE CSE 2009 | Question: 48



Let $G(x)$ be the generator polynomial used for CRC checking. What is the condition that should be satisfied by $G(x)$ to detect odd number of bits in error?

- A. $G(x)$ contains more than two terms
- B. $G(x)$ does not divide $1 + x^k$, for any k not exceeding the frame length
- C. $1 + x$ is a factor of $G(x)$
- D. $G(x)$ has an odd number of terms.

gategse-2009 computer-networks error-detection normal

Answer key

4.11.5 Error Detection: GATE CSE 2017 Set 2 | Question: 34



Consider the binary code that consists of only four valid codewords as given below:

00000, 01011, 10101, 11110

Let the minimum Hamming distance of the code be p and the maximum number of erroneous bits that can be corrected by the code be q . Then the values of p and q are

- A. $p = 3$ and $q = 1$ B. $p = 3$ and $q = 2$ C. $p = 4$ and $q = 1$ D. $p = 4$ and $q = 2$

gatecse-2017-set2 computer-networks error-detection

Answer key

4.11.6 Error Detection: GATE CSE 2021 Set 1 | Question: 29



Assume that a 12-bit Hamming codeword consisting of 8-bit data and 4 check bits is $d_8d_7d_6d_5c_8d_4d_3d_2c_4d_1c_2c_1$, where the data bits and the check bits are given in the following tables:

Data bits								Check bits			
d_8	d_7	d_6	d_5	d_4	d_3	d_2	d_1	c_8	c_4	c_2	c_1
1	1	0	x	0	1	0	1	y	0	1	0

Which one of the following choices gives the correct values of x and y ?

- A. x is 0 and y is 0 B. x is 0 and y is 1 C. x is 1 and y is 0 D. x is 1 and y is 1

gatecse-2021-set1 computer-networks hamming-code two-marks error-detection

Answer key

4.11.7 Error Detection: GATE IT 2005 | Question: 74



In a communication network, a packet of length L bits takes link L_1 with a probability of p_1 or link L_2 with a probability of p_2 . Link L_1 and L_2 have bit error probability of b_1 and b_2 respectively. The probability that the packet will be received without error via either L_1 or L_2 is

- A. $(1 - b_1)^L p_1 + (1 - b_2)^L p_2$ B. $[1 - (b_1 + b_2)^L] p_1 p_2$
 C. $(1 - b_1)^L (1 - b_2)^L p_1 p_2$ D. $1 - (b_1^L p_1 + b_2^L p_2)$

gateit-2005 computer-networks error-detection probability normal

Answer key

4.11.8 Error Detection: GATE IT 2007 | Question: 43



An error correcting code has the following code words: 00000000, 00001111, 01010101, 10101010, 11110000. What is the maximum number of bit errors that can be corrected?

- A. 0 B. 1 C. 2 D. 3

gateit-2007 computer-networks error-detection normal

Answer key

4.11.9 Error Detection: GATE IT 2008 | Question: 66



Data transmitted on a link uses the following $2D$ parity scheme for error detection:

Each sequence of 28 bits is arranged in a 4×7 matrix (rows r_0 through r_3 , and columns d_7 through d_1) and is padded with a column d_0 and row r_4 of parity bits computed using the Even parity scheme. Each bit of column d_0 (respectively, row r_4) gives the parity of the corresponding row (respectively, column). These 40 bits are transmitted over the data link.

	d_7	d_6	d_5	d_4	d_3	d_2	d_1	d_0
r_0	0	1	0	1	0	0	1	1
r_1	1	1	0	0	1	1	1	0
r_2	0	0	0	1	0	1	0	0
r_3	0	1	1	0	1	0	1	0
r_4	1	1	0	0	0	1	1	0

The table shows data received by a receiver and has n corrupted bits. What is the minimum possible value of n ?

- A. 1 B. 2 C. 3 D. 4

gateit-2008 computer-networks normal error-detection

Answer key

4.11.10 Error Detection: GATE1987-2-i



Match the pairs in the following questions:

(A) Cyclic Redundancy Code	(p) Error Correction
(B) Serial Communication	(q) Wired-OR
(C) Open Collector	(r) Error detection
(D) Hamming Code	(s) RS-232-C

gate1989 descriptive computer-networks error-detection

Answer key

4.12

Ethernet (7)

4.12.1 Ethernet: GATE CSE 2004 | Question: 54



A and B are the only two stations on an Ethernet. Each has a steady queue of frames to send. Both A and B attempt to transmit a frame, collide, and A wins the first backoff race. At the end of this successful transmission by A , both A and B attempt to transmit and collide. The probability that A wins the second backoff race is:

- A. 0.5 B. 0.625 C. 0.75 D. 1.0

gatecse-2004 computer-networks ethernet probability normal

Answer key

4.12.2 Ethernet: GATE CSE 2013 | Question: 36



Determine the maximum length of the cable (in km) for transmitting data at a rate of 500 Mbps in an Ethernet LAN with frames of size 10,000 bits. Assume the signal speed in the cable to be 2,00,000 km/s.

- A. 1 B. 2
C. 2.5 D. 5

gatecse-2013 computer-networks ethernet normal

Answer key

4.12.3 Ethernet: GATE CSE 2016 Set 2 | Question: 24



In an Ethernet local area network, which one of the following statements is **TRUE**?


- A. A station stops to sense the channel once it starts transmitting a frame.
B. The purpose of the jamming signal is to pad the frames that are smaller than the minimum frame size.
C. A station continues to transmit the packet even after the collision is detected.
D. The exponential back off mechanism reduces the probability of collision on retransmissions.

Answer key

4.12.4 Ethernet: GATE CSE 2022 | Question: 12



Consider an enterprise network with two Ethernet segments, a web server and a firewall, connected via three routers as shown below.

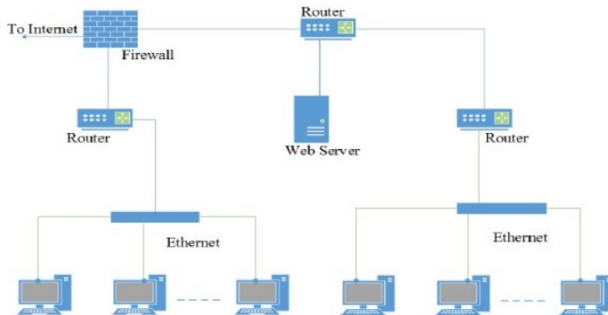

What is the number of subnets inside the enterprise network?

- A. 3 B. 12 C. 6 D. 8

gatecse-2022 computer-networks ethernet one-mark

Answer key

4.12.5 Ethernet: GATE CSE 2024 | Set 2 | Question: 13



Node X has a TCP connection open to node Y . The packets from X to Y go through an intermediate IP router R . Ethernet switch S is the first switch on the network path between X and R . Consider a packet sent from X to Y over this connection.

Which of the following statements is/are TRUE about the destination IP and MAC addresses on this packet at the time it leaves X ?

- A. The destination IP address is the IP address of R
 B. The destination IP address is the IP address of Y
 C. The destination MAC address is the MAC address of S
 D. The destination MAC address is the MAC address of Y

gatecse2024-set2 computer-networks multiple-selects ethernet one-mark

Answer key

4.12.6 Ethernet: GATE CSE 2024 | Set 2 | Question: 45



Consider an Ethernet segment with a transmission speed of 10^8 bits/sec and a maximum segment length of 500 meters. If the speed of propagation of the signal in the medium is 2×10^8 meters/sec, then the minimum frame size (in bits) required for collision detection is _____.

gatecse2024-set2 numerical-answers computer-networks ethernet two-marks

Answer key

4.12.7 Ethernet: GATE IT 2006 | Question: 19



Which of the following statements is TRUE?

- A. Both Ethernet frame and IP packet include checksum fields
 B. Ethernet frame includes a checksum field and IP packet includes a CRC field
 C. Ethernet frame includes a CRC field and IP packet includes a checksum field
 D. Both Ethernet frame and IP packet include CRC fields

Answer key


4.13

Fragmentation (2)

4.13.1 Fragmentation: GATE CSE 2025 | Set 1 | Question: 47



Suppose a message of size 15000 bytes is transmitted from a source to a destination using IPv4 protocol via two routers as shown in the figure. Each router has a defined maximum transmission unit (MTU) as shown in the figure, including IP header. The number of fragments that will be delivered to the destination is _____. (Answer in integer)

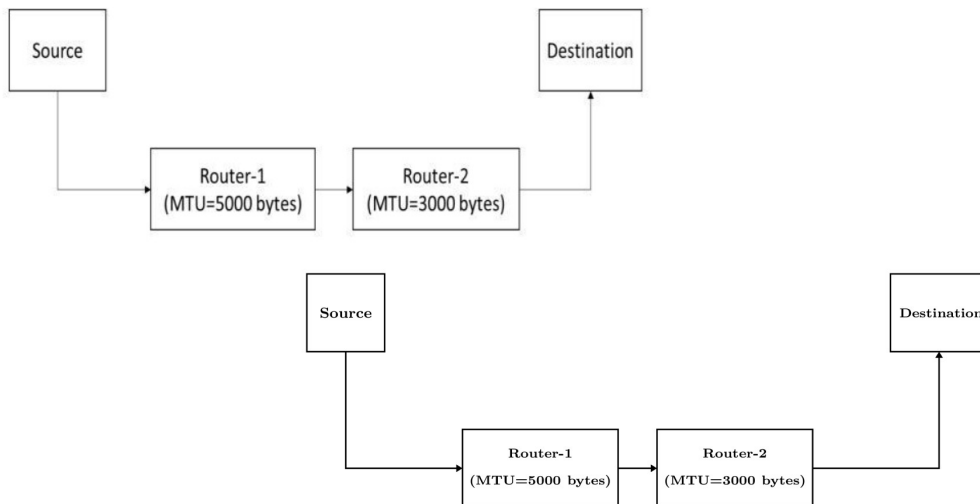

Answer key

4.13.2 Fragmentation: GATE CSE 2025 | Set 2 | Question: 13



Consider a network that uses Ethernet and *IPv4*. Assume that *IPv4* headers do not use any options field. Each Ethernet frame can carry a maximum of 1500 bytes in its data field. A UDP segment is transmitted. The payload (data) in the UDPO segment is 7488 bytes.

Which ONE of the following choices has the CORRECT total number of fragments transmitted and the size of the last fragment including *IPv4* header?

- A. 5 fragments 1488 bytes
- B. 6 fragments 88 bytes
- C. 6 fragments 108 bytes
- D. 6 fragments 116 bytes

Answer key

4.14

IP Addressing (11)

4.14.1 IP Addressing: GATE CSE 2003 | Question: 27



Which of the following assertions is FALSE about the Internet Protocol (IP)?

- A. It is possible for a computer to have multiple IP addresses
- B. IP packets from the same source to the same destination can take different routes in the network
- C. IP ensures that a packet is discarded if it is unable to reach its destination within a given number of hops
- D. The packet source cannot set the route of an outgoing packets; the route is determined only by the routing tables in the routers on the way

4.14.2 IP Addressing: GATE CSE 2004 | Question: 56



Consider three IP networks A , B and C . Host H_A in network A sends messages each containing 180 bytes of application data to a host H_C in network C . The TCP layer prefixes 20 byte header to the message.

This passes through an intermediate network B . The maximum packet size, including 20 byte IP header, in each network is:

- A: 1000 bytes
- B: 100 bytes
- C: 1000 bytes

The network A and B are connected through a 1 Mbps link, while B and C are connected by a 512 Kbps link (bps = bits per second).



Assuming that the packets are correctly delivered, how many bytes, including headers, are delivered to the IP layer at the destination for one application message, in the best case? Consider only data packets.

- A. 200 B. 220 C. 240 D. 260

gatecse-2004 computer-networks ip-addressing tcp normal

4.14.3 IP Addressing: GATE CSE 2004 | Question: 57



Consider three IP networks A , B and C . Host H_A in network A sends messages each containing 180 bytes of application data to a host H_C in network C . The TCP layer prefixes 20 byte header to the message. This passes through an intermediate network B . The maximum packet size, including 20 byte IP header, in each network, is:

- A : 1000 bytes
- B : 100 bytes
- C : 1000 bytes

The network A and B are connected through a 1 Mbps link, while B and C are connected by a 512 Kbps link (bps = bits per second).



What is the rate at which application data is transferred to host H_C ? Ignore errors, acknowledgments, and other overheads.

- A. 325.5 Kbps B. 354.5 Kbps
C. 409.6 Kbps D. 512.0 Kbps

gatecse-2004 computer-networks ip-addressing tcp normal

4.14.4 IP Addressing: GATE CSE 2012 | Question: 23



In the IPv4 addressing format, the number of networks allowed under Class C addresses is:

- A. 2^{14} B. 2^7 C. 2^{21} D. 2^{24}

gatecse-2012 computer-networks ip-addressing easy

4.14.5 IP Addressing: GATE CSE 2013 | Question: 37



In an IPv4 datagram, the M bit is 0, the value of $HLEN$ is 10, the value of total length is 400 and the fragment offset value is 300. The position of the datagram, the sequence numbers of the first and the last bytes of the payload, respectively are:

- A. Last fragment, 2400 and 2789
- B. First fragment, 2400 and 2759
- C. Last fragment, 2400 and 2759
- D. Middle fragment, 300 and 689

gatecse-2013 computer-networks ip-addressing normal

Answer key

4.14.6 IP Addressing: GATE CSE 2014 Set 3 | Question: 27



Every host in an IPv4 network has a 1-second resolution real-time clock with battery backup. Each host needs to generate up to 1000 unique identifiers per second. Assume that each host has a globally unique IPv4 address. Design a 50-bit globally unique ID for this purpose. After what period (in seconds) will the identifiers generated by a host wrap around?

gatecse-2014-set3 computer-networks ip-addressing numerical-answers normal

Answer key

4.14.7 IP Addressing: GATE CSE 2017 Set 2 | Question: 20



The maximum number of IPv4 router addresses that can be listed in the record route (RR) option field of an IPv4 header is _____.

gatecse-2017-set2 computer-networks ip-addressing numerical-answers

Answer key

4.14.8 IP Addressing: GATE CSE 2018 | Question: 54



Consider an IP packet with a length of 4,500 bytes that includes a 20-byte IPv4 header and a 40-byte TCP header. The packet is forwarded to an IPv4 router that supports a Maximum Transmission Unit (MTU) of 600 bytes. Assume that the length of the IP header in all the outgoing fragments of this packet is 20 bytes. Assume that the fragmentation offset value stored in the first fragment is 0.

The fragmentation offset value stored in the third fragment is _____.

gatecse-2018 computer-networks ip-addressing numerical-answers two-marks

Answer key

4.14.9 IP Addressing: GATE CSE 2023 | Question: 42



Suppose in a web browser, you click on the `www.gate-2023.in` URL. The browser cache is empty. The IP address for this URL is not cached in your local host, so a DNS lookup is triggered (by the local DNS server deployed on your local host) over the 3-tier DNS hierarchy in an iterative mode. No resource records are cached anywhere across all DNS servers.

Let RTT denote the round trip time between your local host and DNS servers in the DNS hierarchy. The round trip time between the local host and the web server hosting `www.gate-2023.in` is also equal to RTT . The HTML file associated with the URL is small enough to have negligible transmission time and negligible rendering time by your web browser, which references 10 equally small objects on the same web server.

Which of the following statements is/are CORRECT about the minimum elapsed time between clicking on the URL and your browser fully rendering it?

- A. 7 RTT s, in case of non-persistent HTTP with 5 parallel TCP connections.
- B. 5 RTT s, in case of persistent HTTP with pipelining.
- C. 9 RTT s, in case of non-persistent HTTP with 5 parallel TCP connections.
- D. 6 RTT s, in case of persistent HTTP with pipelining.

gatecse-2023 computer-networks ip-addressing multiple-selects two-marks

Answer key

4.14.10 IP Addressing: GATE CSE 2024 | Set 2 | Question: 28



Which one of the following CIDR prefixes exactly represents the range of IP addresses 10.12.2.0 to 10.12.3.255?

- A. 10.12.2.0/23
- B. 10.12.2.0/24
- C. 10.12.0.0/22
- D. 10.12.2.0/22

gatecse2024-set2 computer-networks ip-addressing two-marks

Answer key

4.14.11 IP Addressing: GATE CSE 2025 | Set 2 | Question: 8



A machine receives an IPv4 datagram. The protocol field of the IPv4 header has the protocol number of a protocol X .

Which ONE of the following is NOT a possible candidate for X ?

- A. Internet Control Message Protocol (ICMP)
- B. Internet Group Management (IGMP)
- C. Open Shortest Path First (OSPF)
- D. Routing Information Protocol (RIP)

gatecse2025-set2 computer-networks ip-addressing one-mark

Answer key

4.15

IP Packet (11)

4.15.1 IP Packet: GATE CSE 2006 | Question: 5



For which one of the following reasons does internet protocol(IP) use the time-to-live(TTL) field in IP datagram header?

- A. Ensure packets reach destination within that time
- B. Discard packets that reach later than that time
- C. Prevent packets from looping indefinitely
- D. Limit the time for which a packet gets queued in intermediate routers

gatecse-2006 computer-networks ip-addressing ip-packet easy

Answer key

4.15.2 IP Packet: GATE CSE 2010 | Question: 15. PGEE 2018



One of the header fields in an IP datagram is the Time-to-Live (TTL) field. Which of the following statements best explains the need for this field?

- A. It can be used to prioritize packets.
- B. It can be used to reduce delays.
- C. It can be used to optimize throughput.
- D. It can be used to prevent packet looping.

gatecse-2010 computer-networks ip-packet easy

Answer key

4.15.3 IP Packet: GATE CSE 2014 Set 3 | Question: 25



Host A (on TCP/IP v4 network A) sends an IP datagram D to host B (also on TCP/IP v4 network B). Assume that no error occurred during the transmission of D. When D reaches B, which of the following IP header field(s) may be different from that of the original datagram D?

- i. TTL
- ii. Checksum
- iii. Fragment Offset

- A. i only
- B. i and ii only
- C. ii and iii only
- D. i, ii and iii

gatecse-2014-set3 computer-networks ip-packet normal

Answer key

4.15.4 IP Packet: GATE CSE 2014 Set 3 | Question: 28



An *IP* router with a Maximum Transmission Unit (MTU) of 1500 bytes has received an *IP* packet of size 4404 bytes with an *IP* header of length 20 bytes. The values of the relevant fields in the header of the third *IP* fragment generated by the router for this packet are:

- A. MF bit: 0, Datagram Length: 1444; Offset: 370
- B. MF bit: 1, Datagram Length: 1424; Offset: 185
- C. MF bit: 1, Datagram Length: 1500; Offset: 370
- D. MF bit: 0, Datagram Length: 1424; Offset: 2960

gatecse-2014-set3 computer-networks ip-packet normal

Answer key

4.15.5 IP Packet: GATE CSE 2015 Set 1 | Question: 22



Which of the following fields of an IP header is NOT modified by a typical IP router?

- A. Check sum
- B. Source address
- C. Time to Live (TTL)
- D. Length

gatecse-2015-set1 computer-networks ip-packet easy

Answer key

4.15.6 IP Packet: GATE CSE 2015 Set 2 | Question: 52



Host A sends a UDP datagram containing 8880 bytes of user data to host B over an Ethernet LAN. Ethernet frames may carry data up to 1500 bytes (i.e. MTU = 1500 bytes). Size of UDP header is 8 bytes and size of IP header is 20 bytes. There is no option field in IP header. How many total number of IP fragments will be transmitted and what will be the contents of offset field in the last fragment?

- A. 6 and 925
- B. 6 and 7400
- C. 7 and 1110
- D. 7 and 8880

gatecse-2015-set2 computer-networks ip-packet normal

Answer key

4.15.7 IP Packet: GATE CSE 2016 Set 1 | Question: 53



An IP datagram of size 1000 bytes arrives at a router. The router has to forward this packet on a link whose MTU (maximum transmission unit) is 100 bytes. Assume that the size of the IP header is 20 bytes.

The number of fragments that the IP datagram will be divided into for transmission is _____.

gatecse-2016-set1 computer-networks ip-packet normal numerical-answers

Answer key

4.15.8 IP Packet: GATE CSE 2024 | Set 1 | Question: 21



Which of the following fields is/are modified in the IP header of a packet going out of a network address translation (NAT) device from an internal network to an external network?

- A. Source IP
- B. Destination IP
- C. Header Checksum
- D. Total Length

gatecse2024-set1 multiple-selects computer-networks ip-packet one-mark

Answer key

4.15.9 IP Packet: GATE CSE 2024 | Set 2 | Question: 18



Which of the following statements about IPv4 fragmentation is/are TRUE?

- A. The fragmentation of an IP datagram is performed *only* at the source of the datagram
- B. The fragmentation of an IP datagram is performed at any IP router which finds that the size of the datagram

to be transmitted exceeds the MTU

- C. The reassembly of fragments is performed *only* at the destination of the datagram
- D. The reassembly of fragments is performed at all intermediate routers along the path from the source to the destination

gatecse2024-set2 computer-networks multiple-selects ip-packet one-mark

Answer key

4.15.10 IP Packet: GATE CSE 2024 | Set 2 | Question: 22



Which of the following fields of an IP header is/are *a/ways* modified by any router before it forwards the IP packet?

- A. Source IP Address
- B. Protocol
- C. Time to Live (TTL)
- D. Header Checksum

gatecse2024-set2 computer-networks multiple-selects ip-packet one-mark

Answer key

4.15.11 IP Packet: GATE IT 2004 | Question: 86



In the TCP/IP protocol suite, which one of the following is NOT part of the IP header?

- A. Fragment Offset
- B. Source IP address
- C. Destination IP address
- D. Destination port number

gateit-2004 computer-networks ip-packet normal

Answer key

4.16

LAN Technologies (7)

4.16.1 LAN Technologies: GATE CSE 2003 | Question: 83



A 2 km long broadcast LAN has 10^7 bps bandwidth and uses CSMA/CD. The signal travels along the wire at 2×10^8 m/s. What is the minimum packet size that can be used on this network?

- A. 50 bytes
- B. 100 bytes
- C. 200 bytes
- D. None of the above

gatecse-2003 computer-networks lan-technologies normal

Answer key

4.16.2 LAN Technologies: GATE CSE 2007 | Question: 65



There are n stations in slotted LAN. Each station attempts to transmit with a probability p in each time slot. What is the probability that **ONLY** one station transmits in a given time slot?

- A. $np(1-p)^{n-1}$
- B. $(1-p)^{n-1}$
- C. $p(1-p)^{n-1}$
- D. $1 - (1-p)^{n-1}$


gatecse-2007 computer-networks lan-technologies probability normal

Answer key

4.16.3 LAN Technologies: GATE CSE 2014 Set 2 | Question: 25



In the diagram shown below, $L1$ is an Ethernet LAN and $L2$ is a Token-Ring LAN. An IP packet originates from sender S and traverses to R , as shown. The links within each ISP and across the two ISPs, are all point-to-point optical links. The initial value of the TTL field is 32. The maximum possible value of the TTL field when R receives the datagram is _____.

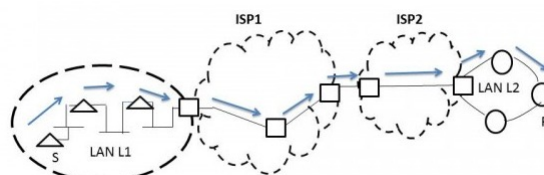

Answer key

4.16.4 LAN Technologies: GATE CSE 2019 | Question: 49



Consider that 15 machines need to be connected in a LAN using 8-port Ethernet switches. Assume that these switches do not have any separate uplink ports. The minimum number of switches needed is _____

gatecse-2019 numerical-answers computer-networks lan-technologies two-marks

Answer key

4.16.5 LAN Technologies: GATE IT 2004 | Question: 27



A host is connected to a Department network which is part of a University network. The University network, in turn, is part of the Internet. The largest network in which the Ethernet address of the host is unique is

- A. the subnet to which the host belongs
- B. the Department network
- C. the University network
- D. the Internet

gateit-2004 computer-networks lan-technologies ethernet normal

Answer key

4.16.6 LAN Technologies: GATE IT 2005 | Question: 28



Which of the following statements is FALSE regarding a bridge?

- A. Bridge is a layer 2 device
- B. Bridge reduces collision domain
- C. Bridge is used to connect two or more LAN segments
- D. Bridge reduces broadcast domain

gateit-2005 computer-networks lan-technologies normal

Answer key

4.16.7 LAN Technologies: GATE IT 2006 | Question: 66



A router has two full-duplex Ethernet interfaces each operating at 100 Mb/s. Ethernet frames are at least 84 bytes long (including the Preamble and the Inter-Packet-Gap). The maximum packet processing time at the router for wire-speed forwarding to be possible is (in microseconds)

- A. 0.01
- B. 3.36
- C. 6.72
- D. 8

gateit-2006 computer-networks lan-technologies ethernet normal

Answer key

4.17 MAC Protocol (5)

4.17.1 MAC Protocol: GATE CSE 2005 | Question: 74



Suppose the round trip propagation delay for a 10 Mbps Ethernet having 48-bit jamming signal is $46.4 \mu\text{s}$. The minimum frame size is:

- A. 94
- B. 416
- C. 464
- D. 512

gatecse-2005 computer-networks mac-protocol ethernet

Answer key

4.17.2 MAC Protocol: GATE CSE 2015 Set 2 | Question: 8



A link has transmission speed of 10^6 bits/sec. It uses data packets of size 1000 bytes each. Assume that the acknowledgment has negligible transmission delay and that its propagation delay is the same as the data propagation delay. Also, assume that the processing delays at nodes are negligible. The efficiency of the stop-and-wait protocol in this setup is exactly 25%. The value of the one way propagation delay (in milliseconds) is _____.

gatecse-2015-set2 computer-networks mac-protocol stop-and-wait normal numerical-answers

Answer key

4.17.3 MAC Protocol: GATE CSE 2021 Set 2 | Question: 54



Consider a network using the pure ALOHA medium access control protocol, where each frame is of length 1,000 bits. The channel transmission rate is 1 Mbps ($= 10^6$ bits per second). The aggregate number of transmissions across all the nodes (including new frame transmissions and retransmitted frames due to collisions) is modelled as a Poisson process with a rate of 1,000 frames per second. Throughput is defined as the average number of frames successfully transmitted per second. The throughput of the network (rounded to the nearest integer) is _____

gatecse-2021-set2 computer-networks mac-protocol pure-aloha numerical-answers two-marks

Answer key

4.17.4 MAC Protocol: GATE IT 2004 | Question: 85



Consider a simplified time slotted MAC protocol, where each host always has data to send and transmits with probability $p = 0.2$ in every slot. There is no backoff and one frame can be transmitted in one slot. If more than one host transmits in the same slot, then the transmissions are unsuccessful due to collision. What is the maximum number of hosts which this protocol can support if each host has to be provided a minimum throughput of 0.16 frames per time slot?

- A. 1 B. 2 C. 3 D. 4

gateit-2004 computer-networks congestion-control mac-protocol normal

Answer key

4.17.5 MAC Protocol: GATE IT 2005 | Question: 75



In a TDM medium access control bus LAN, each station is assigned one time slot per cycle for transmission. Assume that the length of each time slot is the time to transmit 100 bits plus the end-to-end propagation delay. Assume a propagation speed of $2 \times 10^8 \text{ m/sec}$. The length of the LAN is 1 km with a bandwidth of 10 Mbps. The maximum number of stations that can be allowed in the LAN so that the throughput of each station can be $2/3$ Mbps is

- A. 3 B. 5 C. 10 D. 20

gateit-2005 computer-networks mac-protocol normal

Answer key

4.18 Network Flow (4)

4.18.1 Network Flow: GATE CSE 1992 | Question: 01,v



A simple and reliable data transfer can be accomplished by using the 'handshake protocol'. It accomplishes reliable data transfer because for every data item sent by the transmitter _____.

gate1992 computer-networks network-flow easy fill-in-the-blanks

Answer key

4.18.2 Network Flow: GATE CSE 2017 Set 2 | Question: 35



Consider two hosts X and Y , connected by a single direct link of rate 10^6 bits/sec. The distance between the two hosts is 10,000 km and the propagation speed along the link is $2 \times 10^8 \text{ m/sec}$. Host X sends a file of 50,000 bytes as one large message to host Y continuously. Let the transmission and propagation delays be p milliseconds and q milliseconds respectively. Then the value of p and q are

- A. $p = 50$ and $q = 100$ B. $p = 50$ and $q = 400$ C. $p = 100$ and $q = 50$ D. $p = 400$ and $q = 50$

gatecse-2017-set2 computer-networks network-flow

Answer key

4.18.3 Network Flow: GATE IT 2004 | Question: 87



A TCP message consisting of 2100 *bytes* is passed to IP for delivery across two networks. The first network can carry a maximum payload of 1200 *bytes* per frame and the second network can carry a maximum payload of 400 *bytes* per frame, excluding network overhead. Assume that IP overhead per packet is 20 *bytes*. What is the total IP overhead in the second network for this transmission?

- A. 40 bytes B. 80 bytes C. 120 bytes D. 160 bytes

gateit-2004 computer-networks network-flow normal

Answer key

4.18.4 Network Flow: GATE IT 2006 | Question: 67



A link of capacity 100 Mbps is carrying traffic from a number of sources. Each source generates an on-off traffic stream; when the source is on, the rate of traffic is 10 Mbps, and when the source is off, the rate of traffic is zero. The duty cycle, which is the ratio of on-time to off-time, is 1 : 2. When there is no buffer at the link, the minimum number of sources that can be multiplexed on the link so that link capacity is not wasted and no data loss occurs is S_1 . Assuming that all sources are synchronized and that the link is provided with a large buffer, the maximum number of sources that can be multiplexed so that no data loss occurs is S_2 . The values of S_1 and S_2 are, respectively,

- A. 10 and 30 B. 12 and 25 C. 5 and 33 D. 15 and 22

gateit-2006 computer-networks network-flow normal

Answer key

4.19

Network Layering (6)

4.19.1 Network Layering: GATE CSE 2003 | Question: 28



Which of the following functionality *must* be implemented by a transport protocol over and above the network protocol?

- A. Recovery from packet losses B. Detection of duplicate packets
C. Packet delivery in the correct order D. End to end connectivity

gatecse-2003 computer-networks network-layering easy

Answer key

4.19.2 Network Layering: GATE CSE 2004 | Question: 15



Choose the best matching between Group 1 and Group 2

Group-1	Group-2
P. Data link layer	1. Ensures reliable transport of data over a physical point-to-point link
Q. Network layer	2. Encodes/decodes data for physical transmission
R. Transport layer	3. Allows end-to-end communication between two processes
	4. Routes data from one network node to the next

- A. P-1, Q-4, R-3 B. P-2, Q-4, R-1 C. P-2, Q-3, R-1 D. P-1, Q-3, R-2

gatecse-2004 computer-networks network-layering normal

Answer key

4.19.3 Network Layering: GATE CSE 2007 | Question: 70



Match the following:

(P) SMTP	(1) Application layer
(Q) BGP	(2) Transport layer
(R) TCP	(3) Data link layer
(S) PPP	(4) Network layer
	(5) Physical layer

- A. P - 2, Q - 1, R - 3, S - 5
C. P - 1, Q - 4, R - 2, S - 5

- B. P - 1, Q - 4, R - 2, S - 3
D. P - 2, Q - 4, R - 1, S - 3

gatecse-2007 computer-networks network-layering network-protocols easy

Answer key

4.19.4 Network Layering: GATE CSE 2013 | Question: 14



Assume that source S and destination D are connected through two intermediate routers labeled R. Determine how many times each packet has to visit the network layer and the data link layer during a transmission from S to D.

- A. Network layer – 4 times and Data link layer – 4 times
B. Network layer – 4 times and Data link layer – 3 times
C. Network layer – 4 times and Data link layer – 6 times
D. Network layer – 2 times and Data link layer – 6 times

gatecse-2013 computer-networks network-layering normal

Answer key

4.19.5 Network Layering: GATE CSE 2014 Set 3 | Question: 23



In the following pairs of OSI protocol layer/sub-layer and its functionality, the **INCORRECT** pair is

- A. Network layer and Routing
B. Data Link Layer and Bit synchronization
C. Transport layer and End-to-end process communication
D. Medium Access Control sub-layer and Channel sharing

gatecse-2014-set3 computer-networks network-layering easy

Answer key

4.19.6 Network Layering: GATE CSE 2018 | Question: 13



Match the following:

Field	Length in bits
P. UDP Header's Port Number	I. 48
Q. Ethernet MAC Address	II. 8
R. IPv6 Next Header	III. 32
S. TCP Header's Sequence Number	IV. 16

- A. P-III, Q-IV, R-II, S-I
C. P-IV, Q-I, R-II, S-III

- B. P-II, Q-I, R-IV, S-III
D. P-IV, Q-I, R-III, S-II

gatecse-2018 computer-networks network-layering normal one-mark

Answer key

4.20

Network Protocols (10)

4.20.1 Network Protocols: GATE CSE 2005 | Question: 24



The address resolution protocol (ARP) is used for:

- A. Finding the IP address from the DNS
B. Finding the IP address of the default gateway

- C. Finding the IP address that corresponds to a MAC address
- D. Finding the MAC address that corresponds to an IP address

gatecse-2005 computer-networks normal network-protocols

Answer key

4.20.2 Network Protocols: GATE CSE 2007 | Question: 20



Which one of the following uses UDP as the transport protocol?

- A. HTTP
- B. Telnet
- C. DNS
- D. SMTP

gatecse-2007 computer-networks network-protocols application-layer-protocols easy

Answer key

4.20.3 Network Protocols: GATE CSE 2015 Set 1 | Question: 17



In one of the pairs of protocols given below, both the protocols can use multiple TCP connections between the same client and the server. Which one is that?

- A. HTTP, FTP
- B. HTTP, TELNET
- C. FTP, SMTP
- D. HTTP, SMTP

gatecse-2015-set1 computer-networks network-protocols normal

Answer key

4.20.4 Network Protocols: GATE CSE 2016 Set 1 | Question: 24



Which one of the following protocols is **NOT** used to resolve one form of address to another one?

- A. DNS
- B. ARP
- C. DHCP
- D. RARP

gatecse-2016-set1 computer-networks network-protocols normal

Answer key

4.20.5 Network Protocols: GATE CSE 2019 | Question: 29



Suppose that in an IP-over-Ethernet network, a machine X wishes to find the MAC address of another machine Y in its subnet. Which one of the following techniques can be used for this?

- A. X sends an ARP request packet to the local gateway's IP address which then finds the MAC address of Y and sends to X
- B. X sends an ARP request packet to the local gateway's MAC address which then finds the MAC address of Y and sends to X
- C. X sends an ARP request packet with broadcast MAC address in its local subnet
- D. X sends an ARP request packet with broadcast IP address in its local subnet

gatecse-2019 computer-networks network-protocols two-marks

Answer key

4.20.6 Network Protocols: GATE CSE 2021 Set 1 | Question: 49



Consider the sliding window flow-control protocol operating between a sender and a receiver over a full-duplex error-free link. Assume the following:

- The time taken for processing the data frame by the receiver is negligible.
- The time taken for processing the acknowledgement frame by the sender is negligible.
- The sender has infinite number of frames available for transmission.
- The size of the data frame is 2,000 bits and the size of the acknowledgement frame is 10 bits.
- The link data rate in each direction is 1 Mbps ($= 10^6$ bits per second).
- One way propagation delay of the link is 100 milliseconds.

The minimum value of the sender's window size in terms of the number of frames, (rounded to the nearest integer) needed to achieve a link utilization of 50% is _____.

Answer key

4.20.7 Network Protocols: GATE CSE 2021 Set 1 | Question: 8



Consider the following two statements.

- S_1 : Destination MAC address of an ARP reply is a broadcast address.
- S_2 : Destination MAC address of an ARP request is a broadcast address.

Which one of the following choices is correct?

- A. Both S_1 and S_2 are true
 B. S_1 is true and S_2 is false
 C. S_1 is false and S_2 is true
 D. Both S_1 and S_2 are false

gatecse-2021-set1 computer-networks network-protocols one-mark

Answer key

4.20.8 Network Protocols: GATE CSE 2024 | Set 1 | Question: 6



A user starts browsing a webpage hosted at a remote server. The browser opens a single TCP connection to fetch the entire webpage from the server. The webpage consists of a top-level index page with multiple embedded image objects. Assume that all caches (e.g., DNS cache, browser cache) are all initially empty. The following packets leave the user's computer in some order.

- HTTP GET request for the index page
- DNS request to resolve the web server's name to its IP address
- HTTP GET request for an image object
- TCP SYN to open a connection to the web server

Which one of the following is the CORRECT chronological order (earliest in time to latest) of the packets leaving the computer?

- A. (iv), (ii), (iii), (i)
 B. (ii), (iv), (iii), (i)
 C. (ii), (iv), (i), (iii)
 D. (iv), (ii), (i), (iii)

gatecse2024-set1 computer-networks network-protocols one-mark

Answer key

4.20.9 Network Protocols: GATE IT 2007 | Question: 69



Consider the following clauses:

- Not inherently suitable for client authentication.
- Not a state sensitive protocol.
- Must be operated with more than one server.
- Suitable for structured message organization.
- May need two ports on the server side for proper operation.

The option that has the maximum number of correct matches is

- A. IMAP-i; FTP-ii; HTTP-iii; DNS-iv; POP3-v
 B. FTP-i; POP3-ii; SMTP-iii; HTTP-iv; IMAP-v
 C. POP3-i; SMTP-ii; DNS-iii; IMAP-iv; HTTP-v
 D. SMTP-i; HTTP-ii; IMAP-iii; DNS-iv; FTP-v

gateit-2007 computer-networks network-protocols normal

Answer key

4.20.10 Network Protocols: GATE IT 2008 | Question: 68



Which of the following statements are TRUE?

- **S1**: TCP handles both congestion and flow control
- **S2**: UDP handles congestion but not flow control

- **S3**: Fast retransmit deals with congestion but not flow control
- **S4**: Slow start mechanism deals with both congestion and flow control

A. *S1*, *S2* and *S3* only
C. *S3* and *S4* only

B. *S1* and *S3* only
D. *S1*, *S3* and *S4* only

gateit-2008 computer-networks network-protocols normal

Answer key

4.21

Network Switching (4)

4.21.1 Network Switching: GATE CSE 2005 | Question: 73



In a packet switching network, packets are routed from source to destination along a single path having two intermediate nodes. If the message size is 24 bytes and each packet contains a header of 3 bytes, then the optimum packet size is:

A. 4

B. 6

C. 7

D. 9


gatecse-2005 computer-networks network-switching normal

Answer key

4.21.2 Network Switching: GATE CSE 2014 Set 2 | Question: 26



Consider the store and forward packet switched network given below. Assume that the bandwidth of each link is 10^6 bytes / sec. A user on host *A* sends a file of size 10^3 bytes to host *B* through routers *R1* and *R2* in three different ways. In the first case a single packet containing the complete file is transmitted from *A* to *B*. In the second case, the file is split into 10 equal parts, and these packets are transmitted from *A* to *B*. In the third case, the file is split into 20 equal parts and these packets are sent from *A* to *B*. Each packet contains 100 bytes of header information along with the user data. Consider only transmission time and ignore processing, queuing and propagation delays. Also assume that there are no errors during transmission. Let *T1*, *T2* and *T3* be the times taken to transmit the file in the first, second and third case respectively. Which one of the following is CORRECT?



A. $T1 < T2 < T3$

C. $T2 = T3, T3 < T1$

B. $T1 > T2 > T3$

D. $T1 = T3, T3 > T2$

gatecse-2014-set2 computer-networks network-switching normal

Answer key

4.21.3 Network Switching: GATE CSE 2015 Set 3 | Question: 36



Two hosts are connected via a packet switch with 10^7 bits per second links. Each link has a propagation delay of 20 microseconds. The switch begins forwarding a packet 35 microseconds after it receives the same. If 10000 bits of data are to be transmitted between the two hosts using a packet size of 5000 bits, the time elapsed between the transmission of the first bit of data and the reception of the last bit of the data in microseconds is _____.

gatecse-2015-set3 computer-networks normal numerical-answers network-switching

Answer key

4.21.4 Network Switching: GATE IT 2004 | Question: 22



Which one of the following statements is FALSE?

- A. Packet switching leads to better utilization of bandwidth resources than circuit switching
- B. Packet switching results in less variation in delay than circuit switching
- C. Packet switching requires more per-packet processing than circuit switching
- D. Packet switching can lead to reordering unlike in circuit switching

gateit-2004 computer-networks network-switching normal

Answer key

4.22

Osi Model (1)

4.22.1 Osi Model: GATE CSE 2025 | Set 1 | Question: 6



Identify the ONE CORRECT matching between the OSI layers and their corresponding functionalities as shown.

	OSI Layers		Functionalities
(a)	Network Layer	(I)	Packet Routing
(b)	Transport Layer	(II)	Framing and error handling
(c)	Datalink layer	(III)	Host to host communication

- A. (a)-(I), (b)-(II), (c)-(III)
 C. (a)-(II), (b)-(I), (c)-(III)

- B. (a)-(I), (b)-(III), (c)-(II)
 D. (a)-(III), (b)-(II), (c)-(I)

gatecse2025-set1 computer-networks osi-model easy one-mark

Answer key

4.23

Probability (1)

4.23.1 Probability: GATE CSE 2025 | Set 1 | Question: 46



Suppose a 5-bit message is transmitted from a source to a destination through a noisy channel. The probability that a bit of the message gets flipped during transmission is 0.01. Flipping of each bit is independent of one another. The probability that the message is delivered error-free to the destination is _____ (rounded off to three decimal places)

gatecse2025-set1 computer-networks probability numerical-answers easy two-marks

Answer key

4.24

Routing (13)

4.24.1 Routing: GATE CSE 2005 | Question: 26



In a network of LANs connected by bridges, packets are sent from one LAN to another through intermediate bridges. Since more than one path may exist between two LANs, packets may have to be routed through multiple bridges. Why is the *spanning tree algorithm* used for bridge-routing?

- A. For shortest path routing between LANs
 B. For avoiding loops in the routing paths
 C. For fault tolerance
 D. For minimizing collisions

gatecse-2005 computer-networks routing normal

Answer key

4.24.2 Routing: GATE CSE 2014 Set 1 | Question: 23



Consider the following three statements about link state and distance vector routing protocols, for a large network with 500 network nodes and 4000 links.

- [S1]: The computational overhead in link state protocols is higher than in distance vector protocols.
 [S2]: A distance vector protocol (with split horizon) avoids persistent routing loops, but not a link state protocol.
 [S3]: After a topology change, a link state protocol will converge faster than a distance vector protocol.

Which one of the following is correct about $S1$, $S2$, and $S3$?

- A. $S1$, $S2$, and $S3$ are all true.
 B. $S1$, $S2$, and $S3$ are all false.
 C. $S1$ and $S2$ are true, but $S3$ is false.
 D. $S1$ and $S3$ are true, but $S2$ is false.

gatecse-2014-set1 computer-networks routing normal

Answer key

4.24.3 Routing: GATE CSE 2014 Set 2 | Question: 23



Which of the following is TRUE about the interior gateway routing protocols — Routing Information Protocol (*RIP*) and Open Shortest Path First (*OSPF*)

- A. RIP uses distance vector routing and OSPF uses link state routing
- B. OSPF uses distance vector routing and RIP uses link state routing
- C. Both RIP and OSPF use link state routing
- D. Both RIP and OSPF use distance vector routing

gatecse-2014-set2 computer-networks routing normal

Answer key

4.24.4 Routing: GATE CSE 2014 Set 3 | Question: 26



An IP router implementing Classless Inter-domain Routing (CIDR) receives a packet with address 131.23.151.76. The router's routing table has the following entries:

Prefix	Outer Interface Identifier
131.16.0.0/12	3
131.28.0.0/14	5
131.19.0.0/16	2
131.22.0.0/15	1

The identifier of the output interface on which this packet will be forwarded is _____.

gatecse-2014-set3 computer-networks routing normal numerical-answers

Answer key

4.24.5 Routing: GATE CSE 2017 Set 2 | Question: 09



Consider the following statements about the routing protocols. Routing Information Protocol (RIP) and Open Shortest Path First (OSPF) in an **IPv4** network.

- I. RIP uses distance vector routing
- II. RIP packets are sent using UDP
- III. OSPF packets are sent using TCP
- IV. OSPF operation is based on link-state routing

Which of the above statements are CORRECT?

- A. I and IV only
- B. I, II and III only
- C. I, II and IV only
- D. II, III and IV only

gatecse-2017-set2 computer-networks routing

Answer key

4.24.6 Routing: GATE CSE 2020 | Question: 15



Consider the following statements about the functionality of an **IP** based router.

- I. A router does not modify the **IP** packets during forwarding.
- II. It is not necessary for a router to implement any routing protocol.
- III. A router should reassemble **IP** fragments if the **MTU** of the outgoing link is larger than the size of the incoming **IP** packet.

Which of the above statements is/are TRUE?

- A. I and II only
- B. I only
- C. II and III only
- D. II only

gatecse-2020 computer-networks routing one-mark

Answer key

4.24.7 Routing: GATE CSE 2023 | Question: 15



Which of the following statements is/are **INCORRECT** about the OSPF (Open Shortest Path First) routing protocol used in the Internet?

- A. OSPF implements Bellman-Ford algorithm to find shortest paths.
- B. OSPF uses Dijkstra's shortest path algorithm to implement least-cost path routing.
- C. OSPF is used as an inter-domain routing protocol.
- D. OSPF implements hierarchical routing.

gatecse-2023 computer-networks routing multiple-selects one-mark

Answer key

4.24.8 Routing: GATE CSE 2024 | Set 1 | Question: 26



Consider a network path $P - Q - R$ between nodes P and R via router Q . Node P sends a file of size 10^6 bytes to R via this path by splitting the file into chunks of 10^3 bytes each. Node P sends these chunks one after the other without any wait time between the successive chunk transmissions. Assume that the size of extra headers added to these chunks is negligible, and that the chunk size is less than the MTU.

Each of the links $P - Q$ and $Q - R$ has a bandwidth of 10^6 bits/sec, and negligible propagation latency. Router Q immediately transmits every packet it receives from P to R , with negligible processing and queueing delays. Router Q can simultaneously receive on link $P - Q$ and transmit on link $Q - R$.

Assume P starts transmitting the chunks at time $t = 0$.

Which one of the following options gives the time (in seconds, rounded off to 3 decimal places) at which R receives all the chunks of the file?

- A. 8.000
- B. 8.008
- C. 15.992
- D. 16.000

gatecse2024-set1 computer-networks routing two-marks

Answer key

4.24.9 Routing: GATE CSE 2024 | Set 1 | Question: 48



Consider the entries shown below in the forwarding table of an IP router. Each entry consists of an IP prefix and the corresponding next hop router for packets whose destination IP address matches the prefix. The notation $/N$ in a prefix indicates a subnet mask with the most significant N bits set to 1.

Prefix	Next hop router
10.1.1.0 / 24	R1
10.1.1.128 / 25	R2
10.1.1.64 / 26	R3
10.1.1.192 / 26	R4

This router forwards 20 packets each to 5 hosts. The IP addresses of the hosts are 10.1.1.16, 10.1.1.72, 10.1.1.132, 10.1.1.191, and 10.1.1.205. The number of packets forwarded via the next hop router R2 is _____.

gatecse2024-set1 numerical-answers computer-networks routing two-marks


Answer key

4.24.10 Routing: GATE IT 2005 | Question: 85a



Consider a simple graph with unit edge costs. Each node in the graph represents a router. Each node maintains a routing table indicating the next hop router to be used to relay a packet to its destination and the cost of the path to the destination through that router. Initially, the routing table is empty. The routing table is synchronously updated as follows. In each updated interval, three tasks are performed.

- A node determines whether its neighbours in the graph are accessible. If so, it sets the tentative cost to each accessible neighbour as 1. Otherwise, the cost is set to ∞ .
- From each accessible neighbour, it gets the costs to relay to other nodes via that neighbour (as the next hop).
- Each node updates its routing table based on the information received in the previous two steps by choosing the minimum cost.

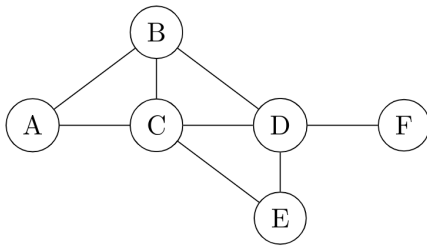

For the graph given above, possible routing tables for various nodes after they have stabilized, are shown in the following options. Identify the correct table.

A.	Table for node A		
	A	-	-
	B	B	1
	C	C	1
	D	B	3
	E	C	3
	F	C	4

B.	Table for node C		
	A	A	1
	B	B	1
	C	-	-
	D	D	1
	E	E	1
	F	E	3

C.	Table for node B		
	A	A	1
	B	-	-
	C	C	1
	D	D	1
	E	C	2
	F	D	2

D.	Table for node D		
	A	B	3
	B	B	1
	C	C	1
	D	-	-
	E	E	1
	F	F	1

gateit-2005 computer-networks routing normal


Answer key

4.24.11 Routing: GATE IT 2005 | Question: 85b



Consider a simple graph with unit edge costs. Each node in the graph represents a router. Each node maintains a routing table indicating the next hop router to be used to relay a packet to its destination and the cost of the path to the destination through that router. Initially, the routing table is empty. The routing table is synchronously updated as follows. In each updated interval, three tasks are performed.

- A node determines whether its neighbors in the graph are accessible. If so, it sets the tentative cost to each accessible neighbor as 1. Otherwise, the cost is set to ∞ .
- From each accessible neighbor, it gets the costs to relay to other nodes via that neighbor (as the next hop).
- Each node updates its routing table based on the information received in the previous two steps by choosing the minimum cost.

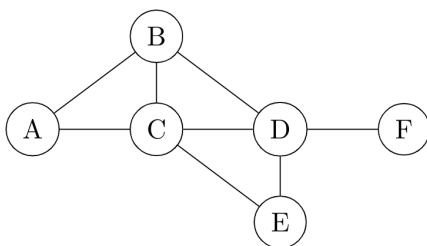

Continuing from the earlier problem, suppose at some time t , when the costs have stabilized, node A goes down. The cost from node F to node A at time $(t + 100)$ is :

- A. > 100 but finite B. ∞ C. 3 D. > 3 and ≤ 100

gateit-2005 computer-networks routing normal

Answer key

4.24.12 Routing: GATE IT 2007 | Question: 63



A group of 15 routers is interconnected in a centralized complete binary tree with a router at each tree node.

Router i communicates with router j by sending a message to the root of the tree. The root then sends the message back down to router j . The mean number of hops per message, assuming all possible router pairs are equally likely is

- A. 3 B. 4.26 C. 4.53 D. 5.26

gateit-2007 computer-networks routing binary-tree normal

Answer key

4.24.13 Routing: GATE IT 2008 | Question: 67



Two popular routing algorithms are Distance Vector(DV) and Link State (LS) routing. Which of the following are true?

(S1): Count to infinity is a problem only with DV and not LS routing

(S2): In LS, the shortest path algorithm is run only at one node

(S3): In DV, the shortest path algorithm is run only at one node

(S4): DV requires lesser number of network messages than LS

- A. S1, S2 and S4 only B. S1, S3 and S4 only C. S2 and S3 only D. S1 and S4 only

gateit-2008 computer-networks routing normal

Answer key

4.25 Routing Protocols (1)

4.25.1 Routing Protocols: GATE CSE 2025 | Set 2 | Question: 7



Consider the routing protocols given in **List I** and the names given in **List II**:

List I	List II
(i) Distance Vector routing	(a) Bellman-Ford
(ii) Link state routing	(b) Dijkstra

For matching of items in **List I** with those in **List II**, which ONE of the following options is CORRECT?

- A. (i) - (a) and (ii) - (b) B. (i) - (a) and (ii) - (a)
C. (i) - (b) and (ii) - (a) D. (i) - (b) and (ii) - (b)

gatecse2025-set2 computer-networks match-the-following routing-protocols easy one-mark

Answer key

4.26 Sliding Window (15)

4.26.1 Sliding Window: GATE CSE 2003 | Question: 84



Host A is sending data to host B over a full duplex link. A and B are using the sliding window protocol for flow control. The send and receive window sizes are 5 packets each. Data packets (sent only from A to B) are all 1000 bytes long and the transmission time for such a packet is $50 \mu s$. Acknowledgment packets (sent only from B to A) are very small and require negligible transmission time. The propagation delay over the link is $200 \mu s$. What is the maximum achievable throughput in this communication?

- A. 7.69×10^6 Bps B. 11.11×10^6 Bps
C. 12.33×10^6 Bps D. 15.00×10^6 Bps

gatecse-2003 computer-networks sliding-window normal

Answer key

4.26.2 Sliding Window: GATE CSE 2005 | Question: 25



The maximum window size for data transmission using the selective reject protocol with n -bit frame sequence numbers is:

A. 2^n B. 2^{n-1} C. $2^n - 1$ D. 2^{n-2}

gatecse-2005 computer-networks sliding-window easy

Answer key

4.26.3 Sliding Window: GATE CSE 2006 | Question: 44



Station A uses 32 byte packets to transmit messages to Station B using a sliding window protocol. The round trip delay between A and B is 80 milliseconds and the bottleneck bandwidth on the path between A and B is 128 kbps. What is the optimal window size that A should use?

A. 20

B. 40

C. 160

D. 320

gatecse-2006 computer-networks sliding-window normal

Answer key

4.26.4 Sliding Window: GATE CSE 2006 | Question: 46



Station A needs to send a message consisting of 9 packets to Station B using a sliding window (window size 3) and go-back- n error control strategy. All packets are ready and immediately available for transmission. If every 5th packet that A transmits gets lost (but no acks from B ever get lost), then what is the number of packets that A will transmit for sending the message to B ?

A. 12

B. 14

C. 16

D. 18

gatecse-2006 computer-networks sliding-window normal

Answer key

4.26.5 Sliding Window: GATE CSE 2007 | Question: 69



The distance between two stations M and N is L kilometers. All frames are K bits long. The propagation delay per kilometer is t seconds. Let R bits/second be the channel capacity. Assuming that the processing delay is negligible, the minimum number of bits for the sequence number field in a frame for maximum utilization, when the sliding window protocol is used, is:

A. $\lceil \log_2 \frac{2LtR+2K}{K} \rceil$ B. $\lceil \log_2 \frac{2LtR}{K} \rceil$ C. $\lceil \log_2 \frac{2LtR+K}{K} \rceil$ D. $\lceil \log_2 \frac{2LtR+2K}{2K} \rceil$

gatecse-2007 computer-networks sliding-window normal

Answer key

4.26.6 Sliding Window: GATE CSE 2009 | Question: 57, ISRO2016-75



Frames of 1000 bits are sent over a 10^6 bps duplex link between two hosts. The propagation time is 25 ms. Frames are to be transmitted into this link to maximally pack them in transit (within the link).

What is the minimum number of bits (I) that will be required to represent the sequence numbers distinctly? Assume that no time gap needs to be given between transmission of two frames.

A. $I = 2$ B. $I = 3$ C. $I = 4$ D. $I = 5$

gatecse-2009 computer-networks sliding-window normal isro2016

Answer key

4.26.7 Sliding Window: GATE CSE 2009 | Question: 58



Frames of 1000 bits are sent over a 10^6 bps duplex link between two hosts. The propagation time is 25ms. Frames are to be transmitted into this link to maximally pack them in transit (within the link).

Let I be the minimum number of bits (I) that will be required to represent the sequence numbers distinctly assuming that no time gap needs to be given between transmission of two frames.

Suppose that the sliding window protocol is used with the sender window size of 2^I , where I is the numbers of bits as mentioned earlier and acknowledgements are always piggy backed. After sending 2^I frames, what is the minimum time the sender will have to wait before starting transmission of the next frame? (Identify the closest

choice ignoring the frame processing time)

- A. $16ms$ B. $18ms$ C. $20ms$ D. $22ms$

gatecse-2009 computer-networks sliding-window normal

Answer key

4.26.8 Sliding Window: GATE CSE 2014 Set 1 | Question: 28



Consider a selective repeat sliding window protocol that uses a frame size of 1 KB to send data on a 1.5 Mbps link with a one-way latency of 50 msec. To achieve a link utilization of 60%, the minimum number of bits required to represent the sequence number field is _____.

gatecse-2014-set1 computer-networks sliding-window numerical-answers normal

Answer key

4.26.9 Sliding Window: GATE CSE 2015 Set 3 | Question: 28



Consider a network connecting two systems located 8000 Km apart. The bandwidth of the network is 500×10^6 bits per second. The propagation speed of the media is 4×10^6 meters per second. It needs to design a Go-Back- N sliding window protocol for this network. The average packet size is 10^7 bits. The network is to be used to its full capacity. Assume that processing delays at nodes are negligible. Then, the minimum size in bits of the sequence number field has to be _____.

gatecse-2015-set3 computer-networks sliding-window normal numerical-answers

Answer key

4.26.10 Sliding Window: GATE CSE 2016 Set 2 | Question: 55



Consider a 128×10^3 bits/second satellite communication link with one way propagation delay of 150 milliseconds. Selective retransmission (repeat) protocol is used on this link to send data with a frame size of 1 kilobyte. Neglect the transmission time of acknowledgement. The minimum number of bits required for the sequence number field to achieve 100% utilization is _____.

gatecse-2016-set2 computer-networks sliding-window normal numerical-answers

Answer key

4.26.11 Sliding Window: GATE IT 2004 | Question: 81



In a sliding window ARQ scheme, the transmitter's window size is N and the receiver's window size is M . The minimum number of distinct sequence numbers required to ensure correct operation of the ARQ scheme is

- A. $\min(M, N)$ B. $\max(M, N)$ C. $M + N$ D. MN

gateit-2004 computer-networks sliding-window normal

Answer key

4.26.12 Sliding Window: GATE IT 2004 | Question: 83



A 20 Kbps satellite link has a propagation delay of 400 ms. The transmitter employs the "go back n ARQ " scheme with n set to 10. Assuming that each frame is 100 byte long, what is the maximum data rate possible?

- A. 5 Kbps B. 10 Kbps
C. 15 Kbps D. 20 Kbps

gateit-2004 computer-networks sliding-window normal

Answer key

4.26.13 Sliding Window: GATE IT 2004 | Question: 88



Suppose that the maximum transmit window size for a TCP connection is 12000 bytes. Each packet consists of 2000 bytes. At some point in time, the connection is in slow-start phase with a current transmit

window of 4000 bytes. Subsequently, the transmitter receives two acknowledgments. Assume that no packets are lost and there are no time-outs. What is the maximum possible value of the current transmit window?

- A. 4000 bytes B. 8000 bytes C. 10000 bytes D. 12000 bytes

gateit-2004 computer-networks sliding-window normal

Answer key

4.26.14 Sliding Window: GATE IT 2006 | Question: 64



Suppose that it takes 1 unit of time to transmit a packet (of fixed size) on a communication link. The link layer uses a window flow control protocol with a window size of N packets. Each packet causes an ack or a nak to be generated by the receiver, and ack/nak transmission times are negligible. Further, the round trip time on the link is equal to N units. Consider time $i > N$. If only acks have been received till time i (no naks), then the goodput evaluated at the transmitter at time i (in packets per unit time) is

- A. $1 - \frac{N}{i}$ B. $\frac{i}{(N + i)}$
C. 1 D. $1 - e^{(\frac{i}{N})}$

gateit-2006 computer-networks sliding-window normal

Answer key

4.26.15 Sliding Window: GATE IT 2008 | Question: 64



A 1 Mbps satellite link connects two ground stations. The altitude of the satellite is 36,504 km and speed of the signal is 3×10^8 m/s. What should be the packet size for a channel utilization of 25% for a satellite link using go-back-127 sliding window protocol? Assume that the acknowledgment packets are negligible in size and that there are no errors during communication.

- A. 120 bytes B. 60 bytes C. 240 bytes D. 90 bytes

gateit-2008 computer-networks sliding-window normal

Answer key

4.27 Sockets (4)

4.27.1 Sockets: GATE CSE 2008 | Question: 17



Which of the following system calls results in the sending of SYN packets?

- A. socket B. bind C. listen D. connect

gatecse-2008 normal computer-networks sockets

Answer key

4.27.2 Sockets: GATE CSE 2008 | Question: 59



A client process P needs to make a TCP connection to a server process S. Consider the following situation: the server process S executes a `socket()`, a `bind()` and a `listen()` system call in that order, following which it is preempted. Subsequently, the client process P executes a `socket()` system call followed by `connect()` system call to connect to the server process S. The server process has not executed any `accept()` system call. Which one of the following events could take place?

- A. `connect()` system call returns successfully
B. `connect()` system call blocks
C. `connect()` system call returns an error
D. `connect()` system call results in a core dump

gatecse-2008 computer-networks sockets normal

Answer key

4.27.3 Sockets: GATE CSE 2014 Set 2 | Question: 24



Which of the following socket API functions converts an unconnected active TCP socket into a passive socket?

- A. connect B. bind C. listen D. accept

gatecse-2014-set2 computer-networks sockets easy

Answer key

4.27.4 Sockets: GATE CSE 2015 Set 2 | Question: 20



Identify the correct order in which a server process must invoke the function calls accept, bind, listen, and recv according to UNIX socket API.

- A. listen, accept, bind, recv B. bind, listen, accept, recv
C. bind, accept, listen, recv D. accept, listen, bind, recv

gatecse-2015-set2 computer-networks sockets easy

Answer key

4.28

Stop and Wait (6)

4.28.1 Stop and Wait: GATE CSE 2015 Set 1 | Question: 53



Suppose that the stop-and-wait protocol is used on a link with a bit rate of 64 kilobits per second and 20 milliseconds propagation delay. Assume that the transmission time for the acknowledgment and the processing time at nodes are negligible. Then the minimum frame size in bytes to achieve a link utilization of at least 50 % is _____.

gatecse-2015-set1 computer-networks stop-and-wait normal numerical-answers

Answer key

4.28.2 Stop and Wait: GATE CSE 2016 Set 1 | Question: 55



A sender uses the Stop-and-Wait ARQ protocol for reliable transmission of frames. Frames are of size 1000 bytes and the transmission rate at the sender is 80 Kbps (1 Kbps = 1000 bits/second). Size of an acknowledgment is 100 bytes and the transmission rate at the receiver is 8 Kbps. The one-way propagation delay is 100 milliseconds.

Assuming no frame is lost, the sender throughput is _____ bytes/ second.

gatecse-2016-set1 computer-networks stop-and-wait normal numerical-answers

Answer key

4.28.3 Stop and Wait: GATE CSE 2017 Set 1 | Question: 45



The values of parameters for the Stop-and-Wait ARQ protocol are as given below:

- Bit rate of the transmission channel = 1 Mbps.
- Propagation delay from sender to receiver = 0.75 ms.
- Time to process a frame = 0.25 ms.
- Number of bytes in the information frame = 1980.
- Number of bytes in the acknowledge frame = 20.
- Number of overhead bytes in the information frame = 20.

Assume there are no transmission errors. Then, the transmission efficiency (expressed in percentage) of the Stop-and-Wait ARQ protocol for the above parameters is _____ (correct to 2 decimal places).

gatecse-2017-set1 computer-networks stop-and-wait numerical-answers normal

Answer key

4.28.4 Stop and Wait: GATE CSE 2023 | Question: 7



Suppose two hosts are connected by a point-to-point link and they are configured to use **Stop-and-Wait** protocol for reliable data transfer. Identify in which one of the following scenarios, the utilization of the link is the lowest.

- A. Longer link length and lower transmission rate
- B. Longer link length and higher transmission rate
- C. Shorter link length and lower transmission rate
- D. Shorter link length and higher transmission rate

gatecse-2023 computer-networks stop-and-wait one-mark

Answer key

4.28.5 Stop and Wait: GATE IT 2005 | Question: 72



A channel has a bit rate of 4 kbps and one-way propagation delay of 20 ms . The channel uses stop and wait protocol. The transmission time of the acknowledgment frame is negligible. To get a channel efficiency of at least 50% , the minimum frame size should be

- A. 80 bytes
- B. 80 bits
- C. 160 bytes
- D. 160 bits

gateit-2005 computer-networks stop-and-wait normal

Answer key

4.28.6 Stop and Wait: GATE IT 2006 | Question: 68



On a wireless link, the probability of packet error is 0.2 . A stop-and-wait protocol is used to transfer data across the link. The channel condition is assumed to be independent of transmission to transmission. What is the average number of transmission attempts required to transfer 100 packets?

- A. 100
- B. 125
- C. 150
- D. 200

gateit-2006 computer-networks sliding-window stop-and-wait normal

Answer key

4.29

Subnetting (21)

4.29.1 Subnetting: GATE CSE 2003 | Question: 82, ISRO2009-1



The subnet mask for a particular network is $255.255.31.0$. Which of the following pairs of IP addresses could belong to this network?

- A. $172.57.88.62$ and $172.56.87.23$
- B. $10.35.28.2$ and $10.35.29.4$
- C. $191.203.31.87$ and $191.234.31.88$
- D. $128.8.129.43$ and $128.8.161.55$

gatecse-2003 computer-networks subnetting normal isro2009

Answer key

4.29.2 Subnetting: GATE CSE 2004 | Question: 55



The routing table of a router is shown below:

Destination	Subnet Mask	Interface
128.75.43.0	255.255.255.0	Eth0
128.75.43.0	255.255.255.128	Eth1
192.12.17.5	255.255.255.255	Eth3
Default		Eth2

On which interface will the router forward packets addressed to destinations $128.75.43.16$ and $192.12.17.10$ respectively?

A. Eth1 and Eth2

B. Eth0 and Eth2

C. Eth0 and Eth3

D. Eth1 and Eth3

gatecse-2004 computer-networks subnetting normal

Answer key

4.29.3 Subnetting: GATE CSE 2005 | Question: 27



An organization has a class B network and wishes to form subnets for 64 departments. The subnet mask would be:

A. 255.255.0.0

B. 255.255.64.0

C. 255.255.128.0

D. 255.255.252.0

gatecse-2005 computer-networks subnetting normal

Answer key

4.29.4 Subnetting: GATE CSE 2006 | Question: 45



Two computers C_1 and C_2 are configured as follows. C_1 has IP address 203.197.2.53 and netmask 255.255.128.0. C_2 has IP address 203.197.75.201 and netmask 255.255.192.0. Which one of the following statements is true?

A. C_1 and C_2 both assume they are on the same network

B. C_2 assumes C_1 is on same network, but C_1 assumes C_2 is on a different network

C. C_1 assumes C_2 is on same network, but C_2 assumes C_1 is on a different network

D. C_1 and C_2 both assume they are on different networks.

gatecse-2006 computer-networks subnetting normal

Answer key

4.29.5 Subnetting: GATE CSE 2007 | Question: 67, ISRO2016-72



The address of a class B host is to be split into subnets with a 6-bit subnet number. What is the maximum number of subnets and the maximum number of hosts in each subnet?

A. 62 subnets and 262142 hosts.

B. 64 subnets and 262142 hosts.

C. 62 subnets and 1022 hosts.

D. 64 subnets and 1024 hosts.

gatecse-2007 computer-networks subnetting easy isro2016

Answer key

4.29.6 Subnetting: GATE CSE 2008 | Question: 57



If a class B network on the Internet has a subnet mask of 255.255.248.0, what is the maximum number of hosts per subnet?

A. 1022

B. 1023

C. 2046

D. 2047

gatecse-2008 computer-networks subnetting easy

Answer key

4.29.7 Subnetting: GATE CSE 2010 | Question: 47



Suppose computers A and B have IP addresses 10.105.1.113 and 10.105.1.91 respectively and they both use same netmask N . Which of the values of N given below should not be used if A and B should belong to the same network?

A. 255.255.255.0

B. 255.255.255.128

C. 255.255.255.192

D. 255.255.255.224

gatecse-2010 computer-networks subnetting easy

Answer key

4.29.8 Subnetting: GATE CSE 2012 | Question: 34, ISRO-DEC2017-32



An Internet Service Provider (ISP) has the following chunk of CIDR-based IP addresses available with it: 245.248.128.0/20. The ISP wants to give half of this chunk of addresses to Organization *A*, and a quarter to Organization *B*, while retaining the remaining with itself. Which of the following is a valid allocation of addresses to *A* and *B*?

- A. 245.248.136.0/21 and 245.248.128.0/22
- B. 245.248.128.0/21 and 245.248.128.0/22
- C. 245.248.132.0/22 and 245.248.132.0/21
- D. 245.248.136.0/24 and 245.248.132.0/21

gatecse-2012 computer-networks subnetting normal isrodec2017

Answer key

4.29.9 Subnetting: GATE CSE 2015 Set 2 | Question: 41



Consider the following routing table at an IP router:

Network No	Net Mask	Next Hop
128.96.170.0	255.255.254.0	Interface 0
128.96.168.0	255.255.254.0	Interface 1
128.96.166.0	255.255.254.0	R2
128.96.164.0	255.255.252.0	R3
0.0.0.0	Default	R4

For each IP address in Group I identify the correct choice of the next hop from Group II using the entries from the routing table above.

Group I	Group II
i) 128.96.171.92	a) Interface 0
ii) 128.96.167.151	b) Interface 1
iii) 128.96.163.151	c) R2
iv) 128.96.164.121	d) R3
	e) R4

- A. i-a, ii-c, iii-e, iv-d
- B. i-a, ii-d, iii-b, iv-e
- C. i-b, ii-c, iii-d, iv-e
- D. i-b, ii-c, iii-e, iv-d

gatecse-2015-set2 computer-networks subnetting easy

Answer key

4.29.10 Subnetting: GATE CSE 2015 Set 3 | Question: 38



In the network 200.10.11.144/27, the fourth octet (in decimal) of the last IP address of the network which can be assigned to a host is _____.

gatecse-2015-set3 computer-networks subnetting normal numerical-answers

Answer key

4.29.11 Subnetting: GATE CSE 2019 | Question: 28



Consider three machines M, N, and P with IP addresses 100.10.5.2, 100.10.5.5, and 100.10.5.6 respectively. The subnet mask is set to 255.255.255.252 for all the three machines. Which one of the following is true?

- A. M, N, and P all belong to the same subnet
- B. Only M and N belong to the same subnet

C. Only N and P belong to the same subnet

D. M, N, and P belong to three different subnets

gatecse-2019 computer-networks subnetting two-marks

Answer key

4.29.12 Subnetting: GATE CSE 2020 | Question: 38



An organization requires a range of IP address to assign one to each of its 1500 computers. The organization has approached an Internet Service Provider (ISP) for this task. The ISP uses CIDR and serves the requests from the available IP address space 202.61.0.0/17. The ISP wants to assign an address space to the organization which will minimize the number of routing entries in the ISP's router using route aggregation. Which of the following address spaces are potential candidates from which the ISP can allot any one of the organization?

- I. 202.61.84.0/21
- II. 202.61.104.0/21
- III. 202.61.64.0/21
- IV. 202.61.144.0/21

- A. I and II only B. II and III only C. III and IV only D. I and IV only

gatecse-2020 computer-networks subnetting two-marks

Answer key

4.29.13 Subnetting: GATE CSE 2022 | Question: 45



Consider routing table of an organization's router shown below:

Subnet Number	Subnet Mask	Next Hop
12.20.164.0	255.255.252.0	R1
12.20.170.0	255.255.254.0	R2
12.20.168.0	255.255.254.0	Interface 0
12.20.166.0	255.255.254.0	Interface 1
default		R3

Which of the following prefixes in CIDR notation can be collectively used to correctly aggregate all of the subnets in the routing table?

- A. 12.20.164.0/20 B. 12.20.164.0/22
C. 12.20.164.0/21 D. 12.20.168.0/22

gatecse-2022 computer-networks subnetting multiple-selects two-marks

Answer key

4.29.14 Subnetting: GATE CSE 2023 | Question: 55



The forwarding table of a router is shown below.

Subnet Number	Subnet Mask	Interface ID
200.150.0.0	255.255.0.0	1
200.150.64.0	255.255.224.0	2
200.150.68.0	255.255.255.0	3
200.150.68.64	255.255.255.224	4
Default		0

A packet addressed to a destination address 200.150.68.118 arrives at the router. It will be forwarded to the interface with ID _____.

Answer key

4.29.15 Subnetting: GATE CSE 2025 | Set 1 | Question: 30



A packet with the destination IP address 145.36.109.70 arrives at a router whose routing table is shown. Which interface will the packet be forwarded to?

Subnet Address	Subnet Mask (in CIDR notation)	Interface
145.36.0.0	/16	E1
145.36.128.0	/17	E2
145.36.64.0	/18	E3
145.36.255.0	/24	E4
Default	—	E5

- A. E3 B. E1 C. E2 D. E5

Answer key

4.29.16 Subnetting: GATE IT 2004 | Question: 26



A subnet has been assigned a subnet mask of 255.255.255.192. What is the maximum number of hosts that can belong to this subnet?

- A. 14 B. 30 C. 62 D. 126

Answer key

4.29.17 Subnetting: GATE IT 2005 | Question: 76



A company has a class C network address of 204.204.204.0. It wishes to have three subnets, one with 100 hosts and two with 50 hosts each. Which one of the following options represents a feasible set of subnet address/subnet mask pairs?

- A. 204.204.204.128/255.255.255.192
 204.204.204.0/255.255.255.128
 204.204.204.64/255.255.255.128
 B. 204.204.204.0/255.255.255.192
 204.204.204.192/255.255.255.128
 204.204.204.64/255.255.255.128
 C. 204.204.204.128/255.255.255.128
 204.204.204.192/255.255.255.192
 204.204.204.224/255.255.255.192
 D. 204.204.204.128/255.255.255.128
 204.204.204.64/255.255.255.192
 204.204.204.0/255.255.255.192

Answer key

4.29.18 Subnetting: GATE IT 2006 | Question: 63, ISRO2015-57



A router uses the following routing table:

Destination	Mask	Interface
144.16.0.0	255.255.0.0	eth0
144.16.64.0	255.255.224.0	eth1
144.16.68.0	255.255.255.0	eth2
144.16.68.64	255.255.255.224	eth3

Packet bearing a destination address 144.16.68.117 arrives at the router. On which interface will it be forwarded?

- A. eth0 B. eth1 C. eth2 D. eth3

gateit-2006 computer-networks subnetting normal isro2015

Answer key 

4.29.19 Subnetting: GATE IT 2006 | Question: 70



A subnetted Class B network has the following broadcast address: 144.16.95.255

Its subnet mask

- A. is necessarily 255.255.224.0
 B. is necessarily 255.255.240.0
 C. is necessarily 255.255.248.0
 D. could be any one of 255.255.224.0, 255.255.240.0, 255.255.248.0

gateit-2006 computer-networks subnetting normal

Answer key 

4.29.20 Subnetting: GATE IT 2008 | Question: 84



Host X has IP address 192.168.1.97 and is connected through two routers $R1$ and $R2$ to another host Y with IP address 192.168.1.80. Router $R1$ has IP addresses 192.168.1.135 and 192.168.1.110. $R2$ has IP addresses 192.168.1.67 and 192.168.1.155. The netmask used in the network is 255.255.255.224.

Given the information above, how many distinct subnets are guaranteed to already exist in the network?

- A. 1 B. 2 C. 3 D. 6

gateit-2008 computer-networks subnetting normal

Answer key 

4.29.21 Subnetting: GATE IT 2008 | Question: 85



Host X has IP address 192.168.1.97 and is connected through two routers $R1$ and $R2$ to another host Y with IP address 192.168.1.80. Router $R1$ has IP addresses 192.168.1.135 and 192.168.1.110. $R2$ has IP addresses 192.168.1.67 and 192.168.1.155. The netmask used in the network is 255.255.255.224.

Which IP address should X configure its gateway as?

- A. 192.168.1.67 B. 192.168.1.110
 C. 192.168.1.135 D. 192.168.1.155

gateit-2008 computer-networks subnetting normal

Answer key 

4.30

TCP (22)

4.30.1 TCP: GATE CSE 2009 | Question: 47



While opening a TCP connection, the initial sequence number is to be derived using a time-of-day (ToD) clock that keeps running even when the host is down. The low order 32 bits of the counter of the ToD clock is to be used for the initial sequence numbers. The clock counter increments once per milliseconds. The maximum packet lifetime is given to be 64s.

Which one of the choices given below is closest to the minimum permissible rate at which sequence numbers used

for packets of a connection can increase?

- A. 0.015/s B. 0.064/s C. 0.135/s D. 0.327/s

gatecse-2009 computer-networks tcp difficult ambiguous

Answer key

4.30.2 TCP: GATE CSE 2012 | Question: 22



Which of the following transport layer protocols is used to support electronic mail?

- A. SMTP B. IP C. TCP D. UDP

gatecse-2012 computer-networks tcp easy

Answer key

4.30.3 TCP: GATE CSE 2015 Set 1 | Question: 19



Suppose two hosts use a TCP connection to transfer a large file. Which of the following statements is/are FALSE with respect to the TCP connection?

- I. If the sequence number of a segment is m , then the sequence number of the subsequent segment is always $m + 1$.
- II. If the estimated round trip time at any given point of time is t sec, the value of the retransmission timeout is always set to greater than or equal to t sec.
- III. The size of the advertised window never changes during the course of the TCP connection.
- IV. The number of unacknowledged bytes at the sender is always less than or equal to the advertised window.

- A. III only B. I and III only C. I and IV only D. II and IV only

gatecse-2015-set1 computer-networks tcp normal

Answer key

4.30.4 TCP: GATE CSE 2015 Set 2 | Question: 34



Assume that the bandwidth for a TCP connection is 1048560 bits/sec. Let α be the value of RTT in milliseconds (rounded off to the nearest integer) after which the TCP window scale option is needed. Let β be the maximum possible window size with window scale option. Then the values of α and β are

- A. 63 milliseconds, 65535×2^{14} B. 63 milliseconds, 65535×2^{16}
C. 500 milliseconds, 65535×2^{14} D. 500 milliseconds, 65535×2^{16}

gatecse-2015-set2 computer-networks difficult tcp

Answer key

4.30.5 TCP: GATE CSE 2015 Set 3 | Question: 22



Consider the following statements.

- I. TCP connections are full duplex
- II. TCP has no option for selective acknowledgement
- III. TCP connections are message streams

- A. Only I is correct B. Only I and III are correct
C. Only II and III are correct D. All of I, II and III are correct

gatecse-2015-set3 computer-networks tcp normal

Answer key

4.30.6 TCP: GATE CSE 2016 Set 2 | Question: 25



Identify the correct sequence in which the following packets are transmitted on the network by a host when a browser requests a webpage from a remote server, assuming that the host has just been restarted.

- A. HTTP GET request, DNS query, TCP SYN B. DNS query, HTTP GET request, TCP SYN
C. DNS query, TCP SYN, HTTP GET D. TCP SYN, DNS query, HTTP GET

request.

request.

gatecse-2016-set2 computer-networks normal tcp

Answer key

4.30.7 TCP: GATE CSE 2017 Set 1 | Question: 14



Consider a TCP client and a TCP server running on two different machines. After completing data transfer, the TCP client calls close to terminate the connection and a FIN segment is sent to the TCP server. Server-side TCP responds by sending an ACK, which is received by the client-side TCP. As per the TCP connection state diagram (RFC 793), in which state does the client-side TCP connection wait for the FIN from the server-side TCP?

- A. LAST-ACK B. TIME-WAIT C. FIN-WAIT-1 D. FIN-WAIT-2

gatecse-2017-set1 computer-networks tcp

Answer key

4.30.8 TCP: GATE CSE 2018 | Question: 25



Consider a long-lived TCP session with an end-to-end bandwidth of 1 Gbps ($= 10^9$ bits-per-second). The session starts with a sequence number of 1234. The minimum time (in seconds, rounded to the closet integer) before this sequence number can be used again is _____.

gatecse-2018 computer-networks tcp normal numerical-answers one-mark

Answer key

4.30.9 TCP: GATE CSE 2020 | Question: 55



Consider a TCP connection between a client and a server with the following specifications; the round trip time is 6 ms, the size of the receiver advertised window is 50 KB, slow-start threshold at the client is 32 KB, and the maximum segment size is 2 KB. The connection is established at time $t = 0$. Assume that there are no timeouts and errors during transmission. Then the size of the congestion window (in KB) at time $t + 60$ ms after all acknowledgements are processed is _____

gatecse-2020 numerical-answers computer-networks tcp two-marks

Answer key

4.30.10 TCP: GATE CSE 2021 Set 1 | Question: 44



A TCP server application is programmed to listen on port number P on host S . A TCP client is connected to the TCP server over the network.

Consider that while the TCP connection was active, the server machine S crashed and rebooted. Assume that the client does not use the TCP keepalive timer. Which of the following behaviors is/are possible?

- A. If the client was waiting to receive a packet, it may wait indefinitely
B. The TCP server application on S can listen on P after reboot
C. If the client sends a packet after the server reboot, it will receive a RST segment
D. If the client sends a packet after the server reboot, it will receive a FIN segment

gatecse-2021-set1 multiple-selects computer-networks tcp two-marks

Answer key

4.30.11 TCP: GATE CSE 2021 Set 1 | Question: 45



Consider two hosts P and Q connected through a router R . The maximum transfer unit (MTU) value of the link between P and R is 1500 bytes, and between R and Q is 820 bytes.

A TCP segment of size 1400 bytes was transferred from P to Q through R , with IP identification value as 0x1234. Assume that the IP header size is 20 bytes. Further, the packet is allowed to be fragmented, i.e., Don't Fragment (DF) flag in the IP header is *not* set by P .

Which of the following statements is/are correct?

- A. Two fragments are created at R and the IP datagram size carrying the second fragment is 620 bytes.
- B. If the second fragment is lost, R will resend the fragment with the IP identification value 0x1234.
- C. If the second fragment is lost, P is required to resend the whole TCP segment.
- D. TCP destination port can be determined by analysing *only* the second fragment.

gatecse-2021-set1 computer-networks tcp two-marks multiple-selects

Answer key

4.30.12 TCP: GATE CSE 2021 Set 2 | Question: 7



Consider the three-way handshake mechanism followed during TCP connection establishment between hosts P and Q . Let X and Y be two random 32-bit starting sequence numbers chosen by P and Q respectively. Suppose P sends a TCP connection request message to Q with a TCP segment having SYN bit = 1, SEQ number = X , and ACK bit = 0. Suppose Q accepts the connection request. Which one of the following choices represents the information present in the TCP segment header that is sent by Q to P ?

- A. SYN bit = 1, SEQ number = $X + 1$, ACK bit = 0, ACK number = Y , FIN bit = 0
- B. SYN bit = 0, SEQ number = $X + 1$, ACK bit = 0, ACK number = Y , FIN bit = 1
- C. SYN bit = 1, SEQ number = Y , ACK bit = 1, ACK number = $X + 1$, FIN bit = 0
- D. SYN bit = 1, SEQ number = Y , ACK bit = 1, ACK number = X , FIN bit = 0

gatecse-2021-set2 computer-networks tcp one-mark

Answer key

4.30.13 TCP: GATE CSE 2022 | Question: 50



Consider the data transfer using TCP over a 1 Gbps link. Assuming that the maximum segment lifetime (MSL) is set to 60 seconds, the minimum number of bits required for the sequence number field of the TCP header, to prevent the sequence number space from wrapping around during the MSL is _____.

gatecse-2022 numerical-answers computer-networks tcp two-marks

Answer key

4.30.14 TCP: GATE CSE 2023 | Question: 40



Suppose you are asked to design a new reliable byte-stream transport protocol like TCP. This protocol, named **myTCP**, runs over a 100 Mbps network with Round Trip Time of 150 milliseconds and the maximum segment lifetime of 2 minutes.

Which of the following is/are valid lengths of the **Sequence Number** field in the **myTCP** header?

- A. 30 bits
- B. 32 bits
- C. 34 bits
- D. 36 bits

gatecse-2023 computer-networks tcp multiple-selects two-marks

Answer key

4.30.15 TCP: GATE CSE 2024 | Set 1 | Question: 19



TCP client P successfully establishes a connection to TCP server Q . Let N_P denote the sequence number in the SYN sent from P to Q . Let N_Q denote the acknowledgement number in the SYN ACK from Q to P . Which of the following statements is/are CORRECT?

- A. The sequence number N_P is chosen randomly by P
- B. The sequence number N_P is always 0 for a new connection
- C. The acknowledgement number N_Q is equal to N_P
- D. The acknowledgement number N_Q is equal to $N_P + 1$

gatecse2024-set1 multiple-selects computer-networks tcp one-mark

Answer key

4.30.16 TCP: GATE CSE 2024 | Set 2 | Question: 44



Consider a TCP connection operating at a point of time with the congestion window of size 12 MSS (Maximum Segment Size), when a timeout occurs due to packet loss. Assuming that all the segments transmitted in the next two RTTs (Round Trip Time) are acknowledged correctly, the congestion window size (*in MSS*) during the third RTT will be _____.

gatecse2024-set2 numerical-answers computer-networks tcp two-marks

Answer key

4.30.17 TCP: GATE CSE 2025 | Set 1 | Question: 12



Consider the 3-way handshaking protocol for TCP connection establishment. Let the three packets exchanged during the connection establishment be denoted as P1, P2, and P3, in order. Which of the following option(s) is/are TRUE with respect to TCP header flags that are set in the packets?

- A. P3 : SYN = 1, ACK = 1
- B. P2 : SYN = 1, ACK = 1
- C. P2: SYN = 0, ACK = 1
- D. P1: SYN = 1

gatecse2025-set1 computer-networks tcp multiple-selects one-mark

Answer key

4.30.18 TCP: GATE IT 2004 | Question: 23



Which one of the following statements is FALSE?

- A. TCP guarantees a minimum communication rate
- B. TCP ensures in-order delivery
- C. TCP reacts to congestion by reducing sender window size
- D. TCP employs retransmission to compensate for packet loss

gateit-2004 computer-networks tcp normal

Answer key

4.30.19 TCP: GATE IT 2004 | Question: 28



In TCP, a unique sequence number is assigned to each

- A. byte
- B. word
- C. segment
- D. message

gateit-2004 computer-networks tcp normal

Answer key

4.30.20 TCP: GATE IT 2007 | Question: 13



Consider the following statements about the timeout value used in TCP.

- i. The timeout value is set to the RTT (Round Trip Time) measured during TCP connection establishment for the entire duration of the connection.
- ii. Appropriate RTT estimation algorithm is used to set the timeout value of a TCP connection.
- iii. Timeout value is set to twice the propagation delay from the sender to the receiver.

Which of the following choices hold?

- A. (i) is false, but (ii) and (iii) are true
- B. (i) and (iii) are false, but (ii) is true
- C. (i) and (ii) are false, but (iii) is true
- D. (i), (ii) and (iii) are false

gateit-2007 computer-networks tcp normal

Answer key

4.30.21 TCP: GATE IT 2007 | Question: 14



Consider a TCP connection in a state where there are no outstanding ACKs. The sender sends two

segments back to back. The sequence numbers of the first and second segments are 230 and 290 respectively. The first segment was lost, but the second segment was received correctly by the receiver. Let X be the amount of data carried in the first segment (in bytes), and Y be the ACK number sent by the receiver. The values of X and Y (in that order) are

- A. 60 and 290 B. 230 and 291 C. 60 and 231 D. 60 and 230


gateit-2007 computer-networks tcp normal

Answer key

4.30.22 TCP: GATE IT 2008 | Question: 69



The three way handshake for TCP connection establishment is shown below.



Which of the following statements are TRUE?

$S1$: Loss of $SYN + ACK$ from the server will not establish a connection

$S2$: Loss of ACK from the client cannot establish the connection

$S3$: The server moves $LISTEN \rightarrow SYN_RCVD \rightarrow SYN_SENT \rightarrow ESTABLISHED$ in the state machine on no packet loss

$S4$: The server moves $LISTEN \rightarrow SYN_RCVD \rightarrow ESTABLISHED$ in the state machine on no packet loss

- A. $S2$ and $S3$ only B. $S1$ and $S4$ only C. $S1$ and $S3$ only D. $S2$ and $S4$ only

gateit-2008 computer-networks tcp normal

Answer key

4.31 Token Bucket (2)

4.31.1 Token Bucket: GATE CSE 2008 | Question: 58



A computer on a 10Mbps network is regulated by a token bucket. The token bucket is filled at a rate of 2Mbps. It is initially filled to capacity with 16Megabits. What is the maximum duration for which the computer can transmit at the full 10Mbps?

- A. 1.6 seconds B. 2 seconds C. 5 seconds D. 8 seconds

gatecse-2008 computer-networks token-bucket

Answer key

4.31.2 Token Bucket: GATE CSE 2016 Set 1 | Question: 54



For a host machine that uses the token bucket algorithm for congestion control, the token bucket has a capacity of 1 megabyte and the maximum output rate is 20 megabytes per second. Tokens arrive at a rate to sustain output at a rate of 10 megabytes per second. The token bucket is currently full and the machine needs to send 12 megabytes of data. The minimum time required to transmit the data is _____ seconds.

gatecse-2016-set1 computer-networks token-bucket normal numerical-answers

Answer key

4.32 UDP (4)

4.32.1 UDP: GATE CSE 2005 | Question: 23



Packets of the same session may be routed through different paths in:

- A. TCP, but not UDP
- B. TCP and UDP
- C. UDP, but not TCP
- D. Neither TCP nor UDP

gatecse-2005 computer-networks tcp udp easy

Answer key

4.32.2 UDP: GATE CSE 2013 | Question: 12



The transport layer protocols used for real time multimedia, file transfer, DNS and email, respectively are

- A. TCP, UDP, UDP and TCP
- B. UDP, TCP, TCP and UDP
- C. UDP, TCP, UDP and TCP
- D. TCP, UDP, TCP and UDP

gatecse-2013 computer-networks tcp udp easy

Answer key

4.32.3 UDP: GATE CSE 2017 Set 2 | Question: 18



Consider socket API on a Linux machine that supports connected UDP sockets. A connected UDP socket is a UDP socket on which connect function has already been called. Which of the following statements is/are CORRECT?

- I. A connected UDP socket can be used to communicate with multiple peers simultaneously.
- II. A process can successfully call connect function again for an already connected UDP socket.

- A. I only
- B. II only
- C. Both I and II
- D. Neither I nor II

gatecse-2017-set2 computer-networks udp

Answer key

4.32.4 UDP: GATE IT 2006 | Question: 69



A program on machine X attempts to open a *UDP* connection to port 5376 on a machine Y , and a *TCP* connection to port 8632 on machine Z . However, there are no applications listening at the corresponding ports on Y and Z . An *ICMP* Port Unreachable error will be generated by

- A. Y but not Z
- B. Z but not Y
- C. Neither Y nor Z
- D. Both Y and Z

gateit-2006 computer-networks tcp udp normal

Answer key

Answer Keys

4.0.1	6	4.1.1	A	4.1.2	C	4.1.3	C	4.1.4	C
4.1.5	B	4.1.6	6	4.1.7	4	4.1.8	B	4.1.9	A
4.1.10	C	4.1.11	D	4.1.12	C	4.2.1	B	4.3.1	B
4.3.2	D	4.4.1	B	4.4.2	A	4.4.3	A	4.5.1	B
4.5.2	C	4.5.3	C	4.5.4	A	4.6.1	D	4.6.2	200
4.6.3	50	4.6.4	C	4.6.5	A	4.6.6	B	4.7.1	A
4.8.1	A	4.8.2	7.07:7.09	4.8.3	B	4.8.4	B	4.9.1	D
4.9.2	C	4.9.3	1100 : 1300	4.9.4	0.4404	4.9.5	C	4.9.6	B
4.10.1	C	4.10.2	B	4.10.3	A	4.10.4	C	4.10.5	B;C
4.10.6	0.5	4.10.7	B	4.10.8	A	4.11.1	3 : 4	4.11.2	N/A
4.11.3	A	4.11.4	C	4.11.5	A	4.11.6	A	4.11.7	A

4.11.8	B
4.12.3	D
4.13.1	7:7
4.14.4	C
4.14.9	C;D
4.15.3	D
4.15.8	A;C
4.16.2	A
4.16.7	B
4.17.5	C
4.19.1	D
4.19.6	C
4.20.5	C
4.20.10	B
4.22.1	B
4.24.4	1
4.24.9	40
4.25.1	A
4.26.5	C
4.26.10	4
4.26.15	A
4.28.1	320
4.28.6	B
4.29.5	C
4.29.10	158
4.29.15	A
4.29.20	C
4.30.4	C
4.30.9	44
4.30.14	B;C;D
4.30.19	A
4.31.2	1.10:1.19

4.11.9	C
4.12.4	C
4.13.2	D
4.14.5	C
4.14.10	A
4.15.4	A
4.15.9	B;C
4.16.3	26
4.17.1	D
4.18.1	N/A
4.19.2	A
4.20.1	D
4.20.6	50 : 52
4.21.1	D
4.23.1	0.949:0.952
4.24.5	C
4.24.10	C
4.26.1	B
4.26.6	D
4.26.11	C
4.27.1	D
4.28.2	2500
4.29.1	D
4.29.6	C
4.29.11	C
4.29.16	C
4.29.21	B
4.30.5	A
4.30.10	A;B;C
4.30.15	A;D
4.30.20	B
4.32.1	B

4.11.10	N/A
4.12.5	B
4.14.1	D
4.14.6	256
4.14.11	D
4.15.5	B
4.15.10	C;D
4.16.4	3
4.17.2	12
4.18.2	D
4.19.3	B
4.20.2	C
4.20.7	C
4.21.2	D
4.24.1	B
4.24.6	D
4.24.11	A
4.26.2	B
4.26.7	C
4.26.12	B
4.27.2	C
4.28.3	86.5 : 89.5
4.29.2	A
4.29.7	D
4.29.12	B
4.29.17	D
4.30.1	A
4.30.6	C
4.30.11	A;C
4.30.16	4
4.30.21	D
4.32.2	C

4.12.1	B
4.12.6	500
4.14.2	D
4.14.7	9
4.15.1	C
4.15.6	C
4.15.11	D
4.16.5	D
4.17.3	130 : 140
4.18.3	C
4.19.4	C
4.20.3	A
4.20.8	C
4.21.3	1575
4.24.2	D
4.24.7	A;C
4.24.12	C
4.26.3	B
4.26.8	5
4.26.13	B
4.27.3	C
4.28.4	B
4.29.3	D
4.29.8	A
4.29.13	B;D
4.29.18	C
4.30.2	C
4.30.7	D
4.30.12	C
4.30.17	B;D
4.30.22	B
4.32.3	B

4.12.2	B
4.12.7	C
4.14.3	B
4.14.8	144
4.15.2	D
4.15.7	13
4.16.1	D
4.16.6	D
4.17.4	B
4.18.4	A
4.19.5	B
4.20.4	C
4.20.9	D
4.21.4	B
4.24.3	A
4.24.8	B
4.24.13	D
4.26.4	C
4.26.9	8
4.26.14	A
4.27.4	B
4.28.5	D
4.29.4	C
4.29.9	A
4.29.14	3
4.29.19	D
4.30.3	B
4.30.8	34 : 35
4.30.13	33
4.30.18	A
4.31.1	B
4.32.4	D