


LAB INSTRUCTIONS

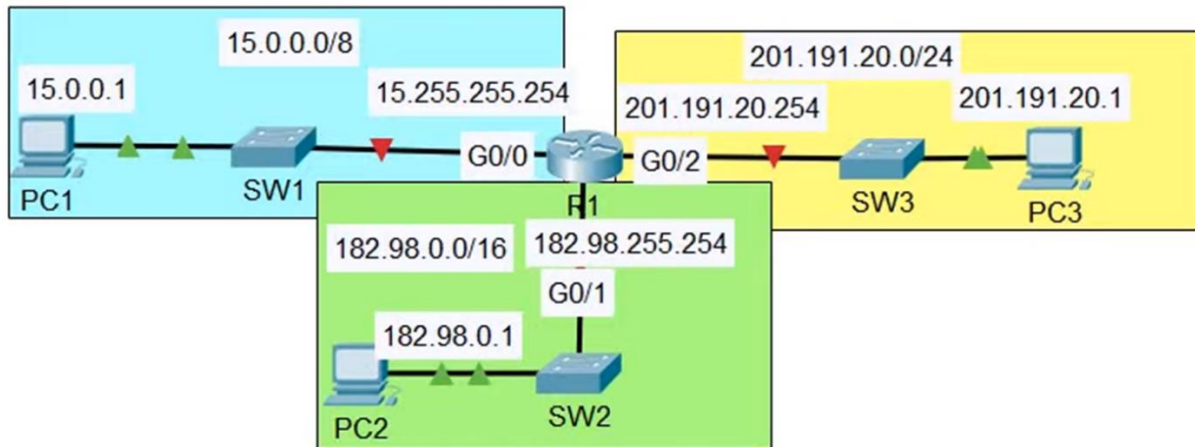

1. Configure R1's Host name.
2. Uses a "Show" Command to view a list of R1's Interfaces, their IP addresses, status etc.
3. Configure the appropriate IP addresses on R's Interfaces, and enable the interfaces configure appropriate interfaces description.
4. Use a "Show" command to verify R1'Interfaces again.
5. View the running config to confirm the configuration changes, then save the config
6. Configure the IP address of PC1, PC2 and PC3.
7. Ping from PC1 to PC2 and PC3.